



**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless LAN Medium Access Control (MAC)  
and Physical Layer (PHY) Specifications**

**Amendment 6: Wireless Access in Vehicular  
Environments**

---

**IEEE Computer Society**

Sponsored by the  
LAN/MAN Standards Committee

IEEE  
3 Park Avenue  
New York, NY 10016-5997, USA

15 July 2010

**IEEE Std 802.11p™-2010**

(Amendment to IEEE Std 802.11™-2007  
as amended by IEEE Std 802.11k™-2008,  
IEEE Std 802.11r™-2008,  
IEEE Std 802.11y™-2008,  
IEEE Std 802.11n™-2009, and  
IEEE Std 802.11w™-2009)

802.11p™



**IEEE Std 802.11p™-2010**  
(Amendment to IEEE Std 802.11™-2007  
as amended by IEEE Std 802.11k™-2008,  
IEEE Std 802.11r™-2008,  
IEEE Std 802.11y™-2008,  
IEEE Std 802.11n™-2009, and  
IEEE Std 802.11w™-2009)

**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless LAN Medium Access Control (MAC)  
and Physical Layer (PHY) Specifications**

**Amendment 6: Wireless Access in Vehicular  
Environments**

Sponsor

**LAN/MAN Standards Committee  
of the  
IEEE Computer Society**

Approved 17 June 2010

**IEEE SA-Standards Board**

**Abstract:** This amendment specifies the extensions to IEEE Std 802.11 for wireless local area networks (WLANs) providing wireless communications while in a vehicular environment.

**Keywords:** 5.9 GHz, wireless access in vehicular environments

---

The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2010 by the Institute of Electrical and Electronics Engineers, Inc.  
All rights reserved. Published 15 July 2010. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by the Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-0-7381-6324-6 STD96080  
Print: ISBN 978-0-7381-6350-5 STDPD96080

*IEEE prohibits discrimination, harassment and bullying. For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>. No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.*

**IEEE Standards** documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

Use of an IEEE Standard is wholly voluntary. The IEEE disclaims liability for any personal injury, property or other damage, of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, or reliance upon this, or any other IEEE Standard document.

The IEEE does not warrant or represent the accuracy or content of the material contained herein, and expressly disclaims any express or implied warranty, including any implied warranty of merchantability or fitness for a specific purpose, or that the use of the material contained herein is free from patent infringement. IEEE Standards documents are supplied "AS IS."

The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least every five years for revision or reaffirmation, or every ten years for stabilization. When a document is more than five years old and has not been reaffirmed, or more than ten years old and has not been stabilized, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

In publishing and making this document available, the IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity. Nor is the IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing this, and any other IEEE Standards document, should rely upon his or her independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration. A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered the official position of IEEE or any of its committees and shall not be considered to be, nor be relied upon as, a formal interpretation of the IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position, explanation, or interpretation of the IEEE.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Recommendations to change the status of a stabilized standard should include a rationale as to why a revision or withdrawal is required. Comments and recommendations on standards, and requests for interpretations should be addressed to:

Secretary, IEEE-SA Standards Board  
445 Hoes Lane  
Piscataway, NJ 08854  
USA

Authorization to photocopy portions of any individual standard for internal or personal use is granted by The Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

## Introduction

This introduction is not part of IEEE Std 802.11p-2010, IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan networks—Specific requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications—Amendment 6: Wireless Access in Vehicular Environments.

IEEE 802.11™ devices may be used in environments where the physical layer properties are rapidly changing and where very short-duration communications exchanges are required. The purpose of this standard is to provide the minimum set of specifications required to ensure interoperability between wireless devices attempting to communicate in potentially rapidly changing communications environments and in situations where transactions must be completed in time frames much shorter than the minimum possible with infrastructure or ad hoc IEEE 802.11 networks. In particular, time frames that are shorter than the amount of time required to perform standard authentication and association to join a BSS are accommodated in this amendment.

This specification accomplishes the following:

- Describes the functions and services required by stations to operate in a rapidly varying environment and to exchange messages without joining a BSS
- Defines the signaling techniques and interface functions used by stations communicating outside of the context of a BSS that are controlled by the IEEE 802.11 MAC

This amendment to IEEE Std 802.11-2007 is based on extensive testing and analyses of wireless communications in a mobile environment. The results of these efforts are documented in ASTM E2213-03, Standard Specification for Telecommunications and Information Exchange Between Roadside and Vehicle Systems—5.9 GHz Band Wireless Access in Vehicular Environments (WAVE)/Dedicated Short Range Communications (DSRC) Medium Access Control (MAC) and Physical Layer (PHY) Specifications.<sup>a</sup> This amendment to IEEE Std 802.11-2007 is technically compatible with ASTM E2213-03.

## Notice to users

### Laws and regulations

Users of these documents should consult all applicable laws and regulations. Compliance with the provisions of this standard does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

### Copyrights

This document is copyrighted by the IEEE. It is made available for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making this document available for use and adoption by public authorities and private users, the IEEE does not waive any rights in copyright to this document.

---

<sup>a</sup>ASTM publications are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, USA (<http://www.astm.org/>).

## Updating of IEEE documents

Users of IEEE standards should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect. In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE Standards Association website at <http://ieeexplore.ieee.org/xpl/standards.jsp>, or contact the IEEE at the address listed previously.

For more information about the IEEE Standards Association or the IEEE standards development process, visit the IEEE-SA website at <http://standards.ieee.org>.

## Errata

Errata, if any, for this and all other standards can be accessed at the following URL: <http://standards.ieee.org/reading/ieee/updates/errata/index.html>. Users are encouraged to check this URL for errata periodically.

## Interpretations

Current interpretations can be accessed at the following URL: <http://standards.ieee.org/reading/ieee/interp/index.html>.

## Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. A patent holder or patent applicant has filed a statement of assurance that it will grant licenses under these rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses. Other Essential Patent Claims may exist for which a statement of assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

## Participants

At the time this amendment was sent to sponsor ballot, the IEEE 802.11 Working Group had the following officers:

**Bruce P. Kraemer**, *Working Group Chair and Chair, Task Group n*  
**Jon Walter Rosdahl**, *Vice Chair and Treasurer*  
**Adrian P. Stephens**, *Vice Chair*  
**Stephen McCann**, *Secretary and Chair, Publicity Standing Committee and Task Group u*  
**Terry L. Cole**, *Technical Editor and Assigned Number Authority*  
**Teik-Kheong Tan**, *Chair, Wireless Next Generation Standing Committee*  
**David Bagby**, *Chair, Architecture Standing Committee*  
**Andrew Myles**, *Chair, JTC1 Ad hoc*  
**Richard H. Kennedy**, *Chair, Regulatory Ad hoc and TVWS Study Group*  
**Michael Montemurro**, *Chair, QoS MAN Study Group*  
**Matthew Gast**, *Chair, Task Group mb*  
**Lee R. Armstrong**, *Chair, Task Group p*  
**Donald E. Eastlake III**, *Chair, Task Group s*  
**Dorothy V. Stanley**, *Chair, Task Group v and IETF Ad hoc Committee*  
**Jesse R. Walker**, *Chair, Task Group w*  
**Menzo M. Wentink**, *Chair, Task Group z*  
**Ganesh Venkatesan**, *Chair, Task Group aa*  
**Osama S. Aboul-Magd**, *Chair, Task Group ac*  
**Eldad Perahia**, *Chair, Task Group ad*  
**Darwin Engwer**, *Co-Chair, IMT-Advanced Ad hoc Committee*

When this amendment was sent to sponsor ballot, Task Group p had the following officers:

**Lee R. Armstrong**, *Chair*  
**Susan Dickey and Filip Weytjens**, *Secretaries*  
**Wayne K. Fisher**, *Editor*

When this amendment was sent to sponsor ballot, the IEEE 802.11 Working Group had the following membership:

Osama S. Aboul-Magd	Joseph Brennan	Rolf J. de Vegt
Santosh P. Abraham	Walter Buga	Theodorus Denteneer
Tomoko Adachi	G. Bumiller	Jeremy deVries
Carlos H. Aldana	Nancy Cam-Winget	Susan Dickey
Gary Anwyl	Necati Canpolat	John Dorsey
Lee R. Armstrong	Javier Cardona	Roger P. Durand
Alex Ashley	Philippe Chambelin	Srinivasa Duvvuri
Malik Audeh	Douglas S. Chan	Donald E. Eastlake III
Geert A. Awater	Clint F. Chaplin	Peter Ecclesine
David Bagby	Jiunn-Tsair Chen	Stephen P. Emeott
Michael Bahr	Lidong Chen	Marc Emmelmann
Fan Bai	Minho Cheong	Darwin Engwer
Gabor Bajko	Woong Cho	Vinko Erceg
Raja Banerjee	Jee-Yon Choi	Stefan Fechtel
Kaberi Banerjee	Nakjung Choi	Matthew J. Fischer
John R. Barr	Liwen Chu	Wayne K. Fisher
Gal Basson	Terry L. Cole	Wen Gao
Tuncer Baykas	Charles I. Cook	Matthew Gast
John L. Benko	Carlos Cordeiro	James P. K. Gilb
Mathilde Benveniste	Xavier Perez Costa	Jeffrey Gilbert
Daniel Borges	David E. Cypher	Reinhard Gloger
Anthony Braskich	Marc De Courville	Michelle Gong



David Goodall	Hui-Ling Lou	Kazuyuki Sakoda
Sudheer A. Grandhi	Bradley Lynch	Hemanth Sampath
Mark Grodzinsky	Jakub Majkowski	Donald Schultz
Jianlin Guo	Alastair Malarky	Jean Schwoerer
Mark Hamilton	Jouni K. Malinen	Yongho Seok
Christopher J. Hansen	Alexander Maltsev	Huairong Shao
Hiroshi Harada	Hiroshi Mano	Stephen J. Shellhammer
Dan N. Harkins	Bill Marshall	Ian Sherlock
Brian D. Hart	Roman M. Maslennikov	Kai Shi
Chris Hartman	Stephen McCann	Francois Simon
Amer A. Hassan	Justin P. McNew	Graham Kenneth Smith
Vegard Hassel	Sven Mesecke	Matt Smith
Robert F. Heile	R. R. Miller	Kapil Sood
Guido R. Hiertz	Michael Montemurro	Vinay Sridhara
Garth D. Hillman	Rajendra T. Moorti	Robert Stacey
Seungeun Hong	Hitoshi Morioka	Dorothy V. Stanley
Naoki Honma	Yuichi Morioka	Adrian P. Stephens
Wendong Hu	Daniel Camps Mur	David S. Stephenson
Robert Y. Huang	Peter Murray	Carl R. Stevenson
Tian-Wei Huang	Andrew Myles	John Stine
David Hunter	Yukimasa Nagai	Guenaël T. Strutt
Akio Iso	Kengo Nagata	Chin-Sean Sum
Wynona Jacobs	Hiroki Nakano	Arash Tabibiazar
Hongseok Jeon	Sai Shankar Nandagopalan	Eiji Takagi
Yeonkwon Jeong	Chiu Ngo	Mineo Takai
Lusheng Ji	Paul Nikolich	Yasushi Takatori
Daniel Jiang	Eero Nikula	Teik-Kheong Tan
Sungeun Jin	Richard H. Noens	Allan Thomson
Vince Jones	Jisung Oh	Jerry Thrasher
Padam Kafle	Jong-Ee Oh	Eric Tokubo
Carl W. Kain	Youko Omori	Ichihiko Toyoda
Naveen K. Kakani	Satoshi Oyama	Jason Trachewsky
Shuzo Kato	Richard H. Paine	Solomon B. Trainin
Douglas Kavner	Arul Durai Murugan Palanivelu	Jean Tsao
Richard H. Kennedy	Changmin Park	Masahiro Umehira
John Kenney	Minyoung Park	Richard D. J. Van Nee
Stuart J. Kerry	Vijaykumar Patel	Allert Van Zelst
Joonsuk Kim	Bemini Hennadige Peiris	Prabodh Varshney
Kyeongpyo Kim	Eldad Perahia	Ganesh Venkatesan
Yongsun Kim	James E. Petranovich	Dalton T. Victor
Youngsoo Kim	Albert Petrick	George A. Vlantis
Yunjoo Kim	John Petro	Jesse R. Walker
Jarkko Kneckt	Vishakan Ponnampalam	Chao-Chun Wang
Mark M. Kobayashi	James D. Portaro	Junyi Wang
Fumihide Kojima	Henry S. Ptasinski	Qi Wang
Tom Kolze	Rene Purnadi	Craig D. Warren
Bruce P. Kraemer	Ivan Pustogarov	Fujio Watanabe
Thomas M. Kurihara	Emily H. Qi	Menzo M. Wentink
Joseph Kwak	Huyu Qu	Frank Whetten
Hyoungjin Kwon	Jim E. Raab	James Worsham
Ismail Lakkis	Mohammad Rahman	Harry R. Worstell
Paul Lambert	Vinuth Rai	Fonchi Wu
Zhou Lan	Ali Raissinia	Takeshi Yamamoto
Jeremy A. Landt	Harish Ramamurthy	James Yee
Joseph P. Lauer	Stephen G. Rayment	Peter Yee
Wooyong Lee	Ivan Reede	Su Khiong Yong
Yuro Lee	Alex Reznik	Seiji Yoshida
Sheung Li	Randal Roebuck	Christopher Young
Hang Liu	Jon Walter Rosdahl	Artur Zaks
Pei Liu	Richard Roy	Hongyuan Zhang
Peter Loc	Alexander Safonov	Shiwei Zhao
		Chunhui Zhu

Major contributions were received from the following individuals:

Guillermo Acosta	John Kenney	Vinuth Rai
Lee R. Armstrong	Keiichiro Koga	Ed Ring
Broady Cash	Thomas Kurihara	Randal Roebuck
Ken Cook	Jeremy Landt	Jon Walter Rosdahl
Susan Dickey	Sheung Li	Richard Roy
Peter Ecclesine	Jason Liu	Francois Simon
Wayne K. Fisher	Alastair Malarky	Robert Soranno
Tim Godfrey	Justin McNew	Lothar Stibor
Mary Ann Ingram	Andrew Myles	George Vlantis
Daniel Jiang	Rick Noens	Bryan Wells
Carl Kain	Satoshi Oyama	Filip Weytjens
Doug Kavner		Jeffrey Zhu

The following members of the balloting committee voted on this amendment. Balloters may have voted for approval, disapproval, or abstention.

Thomas Alexander	C. Guy	Elvis Maculuba
Richard Alfvén	Gloria Gwynne	Faramarz Maghsoodlou
Butch Anton	Marco Hernandez	Alastair Malarky
Daniilo Antonelli	Guido Hiertz	Jouni Malinen
Lee R. Armstrong	Oliver Hoffmann	Mark Maloney
David Bagby	Chun-Yen Hsu	Jeffery Masters
Gabor Bajko	Wendong Hu	Stephen McCann
Raja Banerjea	David Hunter	Michael McInnis
Leslie Baxter	Sergiu Iordanescu	Justin McNew
Harry Bims	Akio Iso	Steven Methley
Gennaro Boggia	Atsushi Ito	Gary Michel
William Byrd	Raj Jain	R. Miller
Peter J. Calderon	Carl Kain	Michael Montemurro
Juan Carreon	Tal Kaitz	Rick Murphy
Douglas Chan	Naveen Kakani	Peter Murray
Clint Chaplin	Shinkyō Kaku	Michael S. Newman
Yung-Mu Chen	Masahiko Kaneko	John Notor
Keith Chow	Chol Kang	Satoshi Obara
Charles Cook	Piotr Karocki	Satoshi Oyama
Todor Cooklev	Assaf Kasher	Eldad Perahia
Wael Diab	Ruediger Kays	James Petranovich
Thomas Dineen	John Kenney	Subburajan Ponnuswamy
Carlo Donati	Stuart J. Kerry	Venkatesha Prasad
Sourav Dutta	Max Kicherer	Michael Probasco
Peter Ecclesine	Yongbum Kim	Ivan Reede
Richard Eckard	Yongho Kim	Maximilian Riegel
Wayne K. Fisher	Brian Kopp	Robert Robinson
C. Fitzgerald	Bruce P. Kraemer	Randal Roebuck
Andre Fournier	Thomas M. Kurihara	Jon Walter Rosdahl
Avraham Freedman	Joseph Kwak	Richard Roy
Matthew Gast	Jeremy Landt	Randall Safier
Devon Gayle	Charles Lennon	John Santhoff
Pieter-Paul Giesberts	Daniel Levesque	Anil Sanwalka
Reinhard Gloger	Zexian Li	John Sargent
Joel Goergen	Jan-Ray Liao	Shigenobu Sasaki
David Goodall	Arthur Light	Peter Saunderson
Sudheer Grandhi	Daniel Lubar	Bartien Sayogo
Ron Greenthaler	William Lumpkins	Josh Schilling
Randall Groves	G. Luri	

Yongho Seok  
Ian Sherlock  
Gil Shultz  
Kapil Sood  
Amjad Soomro  
Manikantan Srinivasan  
Dorothy V. Stanley  
Kenneth Stanwood  
Thomas Starai  
Adrian P. Stephens

Walter Struppler  
Mark Sturza  
Jun Ichi Takada  
Allan Thomson  
Solomon B. Trainin  
Mark-Rene Uchida  
Masahiro Umehira  
Dmitri Varsanofiev  
Prabodh Varshney

George A. Vlantis  
Stanley Wang  
Fujio Watanabe  
Menzo M. Wentink  
Ludwig Winkel  
M. Karen Woolf  
James Worsham  
Harry R. Worstell  
Oren Yuen  
Paolo Zangheri

When the IEEE-SA Standards Board approved this amendment on 17 June 2010, it had the following membership:

**Robert M. Grow**, *Chair*  
**Richard H. Hulett**, *Vice Chair*  
**Steve M. Mills**, *Past Chair*  
**Judith Gorman**, *Secretary*

Karen Bartleson  
Victor Berman  
Ted Burse  
Clint Chaplin  
Andy Drozd  
Alexander Gelman  
Jim Hughes

Young Kyun Kim  
Joseph L. Koepfinger\*  
John Kulick  
David J. Law  
Hung Ling  
Oleg Logvinov  
Ted Olsen

Ronald C. Petersen  
Thomas Prevost  
Jon Walter Rosdahl  
Sam Sciacca  
Mike Seavey  
Curtis Siller  
Don Wright

\*Member Emeritus

Also included are the following nonvoting IEEE-SA Standards Board liaisons:

Satish Aggarwal, *NRC Representative*  
Richard DeBlasio, *DOE Representative*  
Michael Janezic, *NIST Representative*

Lisa Perry  
*IEEE Standards Program Manager, Document Development*

Michael D. Kipness  
*IEEE Standards Program Manager, Technical Program Development*

# Contents

1.	Overview.....	2
1.2	Purpose.....	2
2.	Normative references.....	2
4.	Abbreviations and acronyms.....	2
5.	General Description.....	2
5.2	Components of the IEEE 802.11 architecture.....	2
5.2.6	QoS BSS: The QoS network.....	2
5.2.10	STA transmission of data frames outside the context of a BSS.....	2
5.3	Logical service interfaces.....	3
5.3.1	SS.....	3
7.	Frame formats.....	3
7.1	MAC frame formats.....	3
7.1.3	Frame fields.....	3
7.1.3.1	Frame Control field.....	3
7.1.3.3	Address fields.....	4
7.1.3.5	QoS Control field.....	4
7.2	Format of individual frame types.....	5
7.2.2	Data frames.....	5
7.2.3	Management frames.....	5
7.2.3.14	Timing Advertisement frame format.....	5
7.3	Management frame body components.....	6
7.3.1	Fields that are not information elements.....	6
7.3.1.10	Timestamp field.....	6
7.3.1.31	Organization Identifier field.....	6
7.3.2	Information elements.....	7
7.3.2.26	Vendor Specific information element.....	7
7.3.2.29	EDCA Parameter Set element.....	7
7.3.2.61	Time Advertisement information element.....	8
7.4	Action frame format details.....	9
7.4.5	Vendor-specific action details.....	9
9.	MAC sublayer functional description.....	10
9.1	MAC architecture.....	10
9.1.1	DCF.....	10
9.1.3	Hybrid coordination function (HCF).....	10
9.1.3.1	HCF contention-based channel access (EDCA).....	10
9.2	DCF.....	10
9.2.3	IFS.....	10
9.2.3.4	AIFS.....	10
9.6	Multirate support.....	11
9.6.0a	Overview.....	11

9.9	HCF.....	11
9.9.1	HCF contention-based channel access (EDCA).....	11
9.9.1.2	EDCA TXOPs.....	11
9.9.1.3	Obtaining an EDCA TXOP.....	11
10.	Layer management.....	11
10.3	MLME SAP interface.....	11
10.3.9	Reset.....	11
10.3.9.1	MLME-RESET.request.....	11
10.3.29	Vendor-specific action.....	12
10.3.29.1	MLME-VSPECIFIC.request.....	12
10.3.29.2	MLME-VSPECIFIC.confirm.....	13
10.3.29.3	MLME-VSPECIFIC.indication.....	13
10.3.45	Get TSF timer.....	13
10.3.45.1	MLME-GETTSFTIME.request.....	14
10.3.45.2	MLME-GETTSFTIME.confirm.....	14
10.3.46	Timing Advertisement.....	15
10.3.46.1	MLME-TIMING_ADVERTISEMENT.request.....	15
10.3.46.2	MLME-TIMING_ADVERTISEMENT.confirm.....	16
10.3.46.3	MLME-TIMING_ADVERTISEMENT.indication.....	17
11.	MLME.....	18
11.1	Synchronization.....	18
11.1.1	Basic approach.....	18
11.3	STA authentication and association.....	18
11.19	STAs communicating data frames outside the context of a BSS.....	19
11.20	Timing Advertisement.....	19
11.20.1	Introduction.....	19
11.20.2	Timing Advertisement Frame Procedures.....	19
17.	Orthogonal frequency division multiplexing (OFDM) PHY specification for the 5 GHz band.....	20
17.3	OFDM PLCP sublayer.....	20
17.3.10	PMD receiver specifications.....	20
17.3.10.2	Adjacent channel rejection.....	20
17.3.10.3	Nonadjacent channel rejection.....	20
17.4	OFDM PLME.....	21
17.4.1	PLME_SAP sublayer management primitives.....	21
	Annex A (normative) Protocol Implementation Conformance Statement (PICS) proforma.....	22
A.4	PICS proforma—IEEE Std 802.11-2007.....	22
A.4.3	IUT Configuration.....	22
A.4.4.1	MAC protocol capabilities.....	22
A.4.4.2	MAC frames.....	23
A.4.4.4	MAC addressing function.....	24
A.4.8	OFDM PHY functions.....	24
A.4.15	QoS enhanced distributed channel access (EDCA).....	25
	Annex D (normative) ASN.1 encoding of the MAC and PHY MIB.....	26

Annex I (normative) Regulatory classes.....	29
I.1 External regulatory references .....	29
I.2 Radio performance specifications.....	30
I.2.1 Transmit and receive in-band and out-of-band spurious emissions .....	30
I.2.2 Transmit power levels .....	30
I.2.3 Transmit spectrum mask .....	31
Annex J (normative) Country information element and regulatory classes .....	33
J.1 Country information and regulatory classes .....	33
J.2 Band-specific operating requirements .....	34
J.2.2 5.9 GHz band in the United States (5.850–5.925 GHz).....	34
J.2.3 5.9 GHz band in Europe (5.855–5.925 GHz).....	34
Annex P (informative) Bibliography .....	35

## List of Figures

Figure 7-75—Vendor Specific information element format .....	7
Figure 7-95o27a—Time Advertisement element format.....	8
Figure 7-101—Vendor Specific Action frame format.....	9
Figure I.2—Transmit spectrum mask and application.....	32

## List of Tables

Table 7-1—Valid type and subtype combinations .....	4
Table 7-2—To/From DS combinations in data frames .....	4
Table 7-19b—Timing Advertisement frame body .....	6
Table 7-26—Element IDs .....	7
Table 7-37a—Default EDCA parameter set for STA operation if dot11OCBEnabled is true .....	8
Table 7-43q—Encoding of the Timing Capabilities field .....	9
Table 17-13a—Optional enhanced receiver performance requirements .....	20
Table 17-14—MIB attribute default values/ranges .....	21
Table I.1—Regulatory requirement list .....	29
Table I.2—Emissions limits sets .....	29
Table I.3—Behavior limits sets .....	29
Table I.4—Transmit power level by regulatory domain .....	30
Table I.5a—Maximum STA transmit power classification for the 5.85–5.925 GHz band in the United States .....	31
Table I.8—Spectrum mask data for 10 MHz channel spacing in the 5.85–5.925 GHz band in the United States .....	32
Table J.1—Regulatory classes in the United States .....	33
Table J.2—Regulatory classes in Europe .....	34



**IEEE Standard for  
Information technology—  
Telecommunications and information  
exchange between systems—  
Local and metropolitan area networks—  
Specific requirements**

**Part 11: Wireless LAN Medium Access Control (MAC)  
and Physical Layer (PHY) Specifications**

**Amendment 6: Wireless Access in Vehicular  
Environments**

(This amendment is based on IEEE Std 802.11<sup>TM</sup>-2007 as amended by IEEE Std 802.11k<sup>TM</sup>-2008, IEEE Std 802.11r<sup>TM</sup>-2008, IEEE Std 802.11y<sup>TM</sup>-2008, IEEE Std 802.11n<sup>TM</sup>-2009, and IEEE Std 802.11w<sup>TM</sup>-2009.)

***IMPORTANT NOTICE:** This standard is not intended to ensure safety, security, health, or environmental protection. Implementers of the standard are responsible for determining appropriate safety, security, environmental, and health practices or regulatory requirements.*

*This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.*

NOTE—The editing instructions contained in this amendment define how to merge the material contained herein into the existing base standard and its amendments to form the comprehensive standard.<sup>1</sup>

The editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strike through~~ (to remove old material) and underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Insertions may require renumbering. If so, renumbering instructions are given in the editing instructions. ***Replace*** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.

---

<sup>1</sup>Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

## 1. Overview

### 1.2 Purpose

*Insert a new list item after the first dashed list item:*

- Describes the functions and services that allow an IEEE 802.11™-compliant device to communicate directly with another such device outside of an independent or infrastructure network.

## 2. Normative references

*Insert the following reference in alphanumeric order in Clause 2:*

ITU-R Recommendation TF.460-4(2002), Standard-frequency and time-signal emissions.

## 4. Abbreviations and acronyms

*Insert the following new abbreviations and acronyms in alphabetical order:*

GPS     Global Positioning System  
UTC     Coordinated Universal Time

## 5. General description

### 5.2 Components of the IEEE 802.11 architecture

#### 5.2.6 QoS BSS: The QoS network

*Change the second paragraph in 5.2.6 as follows:*

The enhancements that distinguish QoS STAs from non-QoS STAs and QoS APs from non-QoS APs are collectively termed the *QoS facility*. The quantity of certain, QoS-specific, mechanisms may vary among QoS implementations, as well as between QoS STAs and QoS APs, over ranges specified in subsequent clauses. All service primitives, frame formats, coordination function and frame exchange rules, and management interface functions except for the Block Acknowledgment (Block Ack) function, direct-link setup (DLS), and automatic power-save delivery (APSD) are part of the core QoS facilities. A QoS STA or QoS AP must implement those core QoS facilities necessary for its QoS functions to interoperate with other QoS STAs in the BSS. Functions such as the Block Ack, DLS, and APSD are separate from the core QoS facilities; and the presence of these functions is indicated by STAs separately from the core QoS facilities. A comprehensive statement on mandatory and optional functionalities is available in Annex A.

*Insert the following new subclause (5.2.10) after the last subclause in 5.2, renumbering as necessary:*

#### 5.2.10 STA transmission of data frames outside the context of a BSS

In addition to defining procedures for STA communication within a BSS, this standard also allows a STA that is not a member of a BSS to transmit data frames. Such data frames are defined as being transmitted

outside the context of a BSS. A STA transmits a data frame outside the context of a BSS only if dot11OCBEnabled is true.

NOTE—The specific frame subtypes that a STA is allowed to send when it has dot11OCBEnabled true are specified in 11.19.

When dot11OCBEnabled is true, a data frame can be sent to either an individual or a group destination MAC address. This type of communication is only possible between STAs that are able to communicate directly over the wireless medium. It allows immediate communication, avoiding the latency associated with establishing a BSS. When dot11OCBEnabled is true, a STA is not a member of a BSS and it does not utilize the IEEE 802.11 authentication, association, or data confidentiality services. This capability is particularly well-suited for use in rapidly varying communication environments such as those involving mobile STAs where the interval over which the communication exchanges take place may be of very short-duration (e.g., on the order of tens or hundreds of milliseconds). Since IEEE 802.11 MAC sublayer authentication services are not used when dot11OCBEnabled is true, any required authentication services would be provided by the station management entity (SME) or by applications outside of the MAC sublayer. A STA whose MIB does not include the dot11OCBEnabled attribute operates as if the attribute is false.

Communication of data frames when dot11OCBEnabled is true might take place in a frequency band that is dedicated for its use, and such a band might require licensing depending on the regulatory domain. A STA for which dot11OCBEnabled is true initially transmits and receives on a channel known in advance, either through regulatory designation or some other out-of-band communication. A STA's SME determines PHY layer parameters, as well as any changes in the operating channel, e.g., using information obtained via out-of-band communication or over-the-air frame exchange. The Vendor Specific Action frame (see 7.4.5) provides one means for STAs to exchange management information prior to communicating data frames outside the context of a BSS. When dot11OCBEnabled is true, a sending STA sets the BSSID field to the wildcard BSSID value (see 7.1.3.3.3).

## 5.3 Logical service interfaces

### 5.3.1 SS

*Change the lettered list items (a) through (c) of 5.3.1 as follows:*

- a) Authentication (not used when dot11OCBEnabled is true)
- b) Deauthentication (not used when dot11OCBEnabled is true)
- c) Data confidentiality (not used when dot11OCBEnabled is true)

## 7. Frame formats

### 7.1 MAC frame formats

#### 7.1.3 Frame fields

##### 7.1.3.1 Frame Control field

##### 7.1.3.1.2 Type and Subtype fields

*Insert a new row 7 in the management type rows of Table 7-1 as shown. Change the management frame subtype value(s) as appropriate.*

**Table 7-1—Valid type and subtype combinations**

Type value b3 b2	Type description	Subtype value b7 b6 b5 b4	Subtype Description
00	Management	0110	Timing Advertisement
00	Management	<del>0110</del> – <u>0111</u>	Reserved

### 7.1.3.1.3 To DS and From DS fields

*Change the first row of Table 7-2 as shown:*

**Table 7-2—To/From DS combinations in data frames**

To DS and From DS values	Meaning
To DS = 0 From DS = 0	A data frame direct from one STA to another STA within the same IBSS, <del>or</del> a data frame direct from one non-AP STA to another non-AP STA within the same BSS, <u>or a data frame outside the context of a BSS</u> , as well as all management and control frames.

### 7.1.3.3 Address fields

#### 7.1.3.3.3 BSSID field

*Change the first paragraph of 7.1.3.3.3 as shown:*

The BSSID field is a 48-bit field of the same format as an IEEE 802 MAC address. When dot11OCBEnabled is false, the value of this This field uniquely identifies each BSS. The value of this field, in an infrastructure BSS, is the MAC address currently in use by the STA in the AP of the BSS.

*Change the last paragraph of 7.1.3.3.3 as follows:*

The value of all 1s is used to indicate the wildcard BSSID. The wildcard BSSID value shall not be used in the BSSID field except for management frames of subtype probe request and of subtype Action with Category Public, where explicitly permitted in this standard. When dot11OCBEnabled is true, the wildcard value shall be used in the BSSID field.

#### 7.1.3.5 QoS Control field

##### 7.1.3.5.1 TID subfield

*Insert the following at the end of the last paragraph of 7.1.3.5.1:*

For STAs where dot11OCBEnabled is true, traffic streams are not used and the TID always corresponds to a TC.

### 7.1.3.5.5 Queue Size subfield

*Change the second sentence of the first paragraph of 7.1.3.5.5 as follows:*

The Queue Size subfield is present in QoS data frames sent by non-AP STAs associated in a BSS with bit 4 of the QoS Control field set to 1.

## 7.2 Format of individual frame types

### 7.2.2 Data frames

*Change the paragraph immediately following Table 7-7 as shown:*

A STA uses the contents of the Address 1 field to perform address matching for receive decisions. In cases where the Address 1 field contains a group address, the BSSID also is validated to ensure either that the broadcast or multicast originated from a STA in the BSS of which the receiving STA is a member, or that it contains the wildcard BSSID value, indicating a data frame sent outside the context of a BSS (dot11OCBEnabled is true in the transmitting STA).

*Insert the following new item c) in the lettered list immediately after the sentence “The BSSID of the Data frame is determined as follows”:*

- c) If the STA is transmitting a data frame when dot11OCBEnabled is true, the BSSID shall be the wildcard BSSID.

### 7.2.3 Management frames

*Insert the following new item d) at the end of the lettered list immediately after the sentence “The BSSID of the management frame is determined as follows”:*

- d) If dot11OCBEnabled is true, the BSSID shall be the wildcard BSSID.

*Insert the following new subclause (7.2.3.14) after the last subclause in 7.2.3, renumbering as necessary:*

#### 7.2.3.14 Timing Advertisement frame format

The frame body of a management frame of subtype Timing Advertisement contains the information shown in Table 7-19b.

**Table 7-19b—Timing Advertisement frame body**

Order	Information	Notes
1	Timestamp	See 7.3.1.10 for Timestamp format.
2	Capability	
3	Country	Optional. The Country information element shall be present when dot11MultidomainCapabilityEnabled is true or dot11SpectrumManagementRequired is true.
4	Power Constraint	Optional and may only be present if the Country element is present.
5	Time Advertisement	Optional. See 7.3.2.61.
6	Extended Capabilities	Optional.
Last	Vendor specific	One or more vendor specific information elements may appear in this frame. This information element follows all other information elements.

## 7.3 Management frame body components

### 7.3.1 Fields that are not information elements

#### 7.3.1.10 Timestamp field

*Change the first sentence as follows:*

This field represents the value of the timing synchronization function (TSF) timer (see 11.1 [and 11.20](#)) of a frame's source.

*Insert the following new subclause (7.3.1.31) after the last subclause in 7.3.1, renumbering as necessary:*

#### 7.3.1.31 Organization Identifier field

The Organization Identifier field shall contain a public organizationally unique identifier assigned by the IEEE. The order of the Organization Identifier field shall follow the ordering convention for MAC addresses from 7.1.1. The IEEE has assigned public organizationally unique identifiers both of 24-bit length (OUI) and longer length. In the latter case specific OUI values are shared over multiple organizations, e.g., using 36-bit length identifiers (OUI-36 and IAB) (see IEEE Registration Authority [Bc]). The length of the Organization Identifier field (*j*) shall be the minimum number of octets required to contain the entire organizationally unique identifier (see Figure 7-75), and the first 3 octets shall contain the OUI portion of the identifier. Thus, the Organization Identifier field is 3 octets in length if the organizationally unique identifier is an OUI, or 5 octets in length if the organizationally unique identifier is 36 bits in length. The IEEE assigns 36-bit organizationally unique identifiers such that the OUI portion indicates that total length of the identifier is 36 bits. If the length of the organizationally unique identifier is not an integral number of octets, the least significant bits of the last octet are specified by the organization identified.

NOTE—For example, for the organizationally unique identifier 0x0050C24A4, the Organization Identifier field would contain 0x0050C24A4y where *y* represents the four least significant bits of the fifth octet of the field. The value of *y* is specified by the organization whose identifier is 0x0050C24A4.

**7.3.2 Information elements**

*Insert the following entry into Table 7-26 in the appropriate row as shown:*


**Table 7-26—Element IDs**

Information Element	Element ID	Length (in octets)	Extensible
Time Advertisement (see 7.3.2.61)	69	18 to 257	Yes

**7.3.2.26 Vendor Specific information element**

*Change 7.3.2.26 as follows:*

The Vendor Specific information element is used to carry information not defined in this standard within a single defined format, so that reserved information element IDs are not usurped for nonstandard purposes and so that interoperability is more easily achieved in the presence of nonstandard information. The information element is in the format shown in Figure 7-75 and requires that the first 3 or more octets of the information field contain the OUI of identify the entity that has defined the content of the particular Vendor Specific information element. The length of the information field  $n$  is constrained by  $3 \leq \text{length (Organization Identifier)} \leq n \leq 255$ . The OUI field shall be a public OUI assigned by the IEEE. It is 3 octets in length. The length of the vendor specific content is  $n-3j$  octets, where  $j$  is the length of the Organization Identifier field as described in 7.3.1.31.

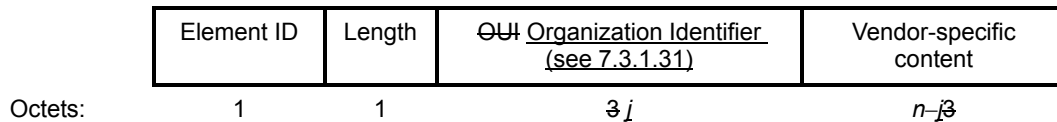

**Figure 7-75—Vendor Specific information element format**

Multiple Vendor Specific information elements may appear in a single frame. Each Vendor Specific information element can have a different Organization Identifier OUI value. The number of Vendor Specific information elements that may appear in a frame is limited only by the maximum frame size.

**7.3.2.29 EDCA Parameter Set element**

*Change the second paragraph of 7.3.2.29 as follows:*

For an infrastructure BSS, ~~The~~ the EDCA Parameter Set element is used by the AP to establish policy (by changing default MIB attribute values), to change policies when accepting new STAs or new traffic, or to adapt to changes in offered load. The most recent EDCA parameter set element received by a non-AP STA is used to update the appropriate MIB values.

*Change the paragraph before Table 7-37 of 7.3.2.29 as follows:*

Table 7-37 defines The the default values used by non-AP STAs for the parameters in the EDCA Parameter Set element are defined in Table 7-37 EDCA parameter values used by a non-AP STA with dot11OCBEnabled set to FALSE.

*Change the title of Table 7-37 of 7.3.2.29 as follows:*

**Table 7-37—Default EDCA Parameter Set element parameter values  
if dot11OCBEnabled is false**

*Insert the following new paragraph and table at the end of 7.3.3.29:*

If dot11OCBEnabled is true, the default EDCA parameter set for STAs transmitting QoS frames is given in Table 7-37a.


**Table 7-37a—Default EDCA parameter set for STA operation if dot11OCBEnabled is true**

AC	CWmin	CWmax	AIFSN	TXOP Limit OFDM/CCK- OFDM PHY
AC_BK	aCWmin	aCWmax	9	0
AC_BE	aCWmin	aCWmax	6	0
AC_VI	$(aCWmin+1)/2-1$	aCWmin	3	0
AC_VO	$(aCWmin+1)/4-1$	$(aCWmin+1)/2-1$	2	0

*Insert the following new subclause (7.3.2.61) after the last subclause in 7.3.2, renumbering as necessary:*

### 7.3.2.61 Time Advertisement information element

The Time Advertisement information element, shown in Figure 7-95o28, specifies fields describing the source of time corresponding to a time standard, an external clock (external time source), an estimate of the offset between that time standard and the TSF timer, and an estimate of the standard deviation of the error in the offset estimate. This information is used by a receiving STA to align its own estimate of the time standard based on that of another STA.

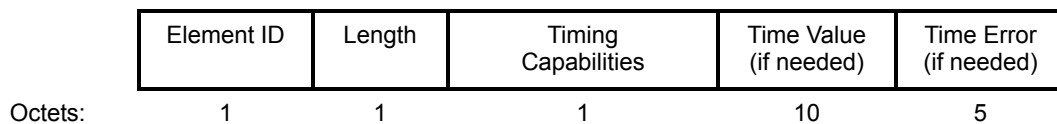

**Figure 7-95o28—Time Advertisement element format**

The Timing Capabilities field specifies the STA's source and encoding of the Time Value field. The encoding of the Timing Capabilities field is specified in Table 7-43q.



**Table 7-43q—Encoding of the Timing Capabilities field**

Value	Usage
0	No standardized external time source
1	Timestamp offset based on UTC [see ITU-R Recommendation TF.460-4(2002)]. The Timestamp offset value in nanoseconds is defined to be 0 at the beginning of the first nanosecond of the first day of the year 1958.
2–255	Reserved

When the value of the Timing Capabilities field is 0, only the Element ID, Length, and Timing Capabilities fields are included in the Time Advertisement information element.

When the value of the Timing Capabilities is 1, the following additional fields are included in the Time Advertisement information element:


- Time Value field, a two’s complement integer in nanoseconds that, when added to the Timestamp present in the same transmitted frame, gives the receiving STA an estimate of the time standard at the time the frame was transmitted. The Timestamp is derived from the TSF Timer as defined in 11.20.
- Time Error field, which is set to an unsigned integer in nanoseconds that defines the standard deviation of the error in the Time Value estimate. The value of all 1s is used to indicate that the error is unknown.

**7.4 Action frame format details**

**7.4.5 Vendor-specific action details**

*Change 7.4.5 as follows:*

The Vendor Specific Action frame is defined for vendor-specific signaling. The format of the Vendor Specific Action frame is shown in Figure 7-101. An ~~OU~~Organization Identifier, in the octet field immediately after the Category field, differentiates the vendors (see 7.3.1.31).



**Figure 7-101—Vendor Specific Action frame format**

The Category field is set to the value indicating the vendor-specific category, as specified in Table 7-24.

The OUI field is a public OUI assigned by the IEEE. It is 3 octets in length. It contains the OUI of the entity that has defined the content of the particular vendor-specific action. The Organization Identifier contains a public organizationally unique identifier assigned by the IEEE and is specified in 7.3.1.31.

The Vendor Specific Content contains vendor-specific field(s). The length of the Vendor Specific Content in a Vendor Specific Action frame is limited by the maximum allowed MMPDU size.

## 9. MAC sublayer functional description

### 9.1 MAC architecture

#### 9.1.1 DCF

*Change the first paragraph of 9.1.1 as follows:*

The fundamental access method of the IEEE 802.11 MAC is a DCF known as *carrier sense multiple access with collision avoidance* (CSMA/CA). The DCF shall be implemented in all STAs, ~~for use within both IBSS and infrastructure network configurations.~~

#### 9.1.3 Hybrid coordination function (HCF)

##### 9.1.3.1 HCF contention-based channel access (EDCA)

*Change the second paragraph of 9.1.3.1 as shown, incorporating ordered list a) into the paragraph (and deleting it from the list), insert a new paragraph, and reletter the ordered list following the new paragraph:*

For each AC, an enhanced variant of the DCF, called an *enhanced distributed channel access function* (EDCAF), contends for TXOPs using a set of EDCA parameters. When communicating data frames outside the context of a BSS (dot11OCBEnabled is true), the EDCA parameters are the corresponding default values or are as set by the SME in the MIB attribute table dot11EDCAtable (except for TXOP limit values, which shall be set to zero for each AC). When communicating within a BSS, the EDCA parameters used are from the EDCA Parameter Set element or from the default values for the parameters when no EDCA Parameter Set element is received from the AP of the BSS with which the STA is associated, where The parameters used by the EDCAF to control its operation are defined by MIB attribute table dot11QAPEDCAtable at the AP and by MIB attribute table dot11EDCAtable at the non-AP STA.

- a) ~~The parameters used by the EDCAF to control its operation are defined by MIB attribute table dot11QAPEDCAtable at the AP and by MIB attribute table dot11EDCAtable at the non-AP STA.~~

The following rules apply for HCF contention-based channel access:

### 9.2 DCF

#### 9.2.3 IFS

##### 9.2.3.4 AIFS

*Change the third paragraph of 9.2.3.4 as follows:*

A non-AP QoS STA computes the time periods for each AIFS[AC] from the dot11EDCATableAIFSN attributes in the MIB. In an infrastructure BSS, QoS STAs update their dot11EDCATableAIFSN values using information in the most recent EDCA Parameter Set element of Beacon frames received from the AP of the BSS (see 7.3.2.28). A QoS AP computes the time periods for each AIFS[AC] from the dot11QAPEDCATableAIFSN attributes in its MIB.

## 9.6 Multirate support

### 9.6.0a Overview

*Insert the following paragraph after the first paragraph of 9.6.0a:*

Only the data transfer rates of the mandatory rate set of the attached PHY are guaranteed to be supported when a STA for which dot11OCBEnabled is true transmits a management or data frame. Higher layer protocols may negotiate a rate outside the mandatory rate set.

## 9.9 HCF

### 9.9.1 HCF contention-based channel access (EDCA)

#### 9.9.1.2 EDCA TXOPs

*Insert the following text at the end of the third paragraph of 9.9.1.2 after NOTE 3:*

When dot11OCBEnabled is true, TXOP limits shall be zero for each AC.

#### 9.9.1.3 Obtaining an EDCA TXOP

*Change the third paragraph of 9.9.1.3 as follows:*

The value of AIFSN[AC] shall be greater than or equal to 2 for non-AP STAs. In an infrastructure BSS, AIFSN[AC] ~~and~~ is advertised by the AP in the EDCA Parameter Set information element in Beacon and Probe Response frames transmitted by the AP. The value of AIFSN[AC] shall be greater than or equal to 1 for APs. An EDCA TXOP is granted to an EDCAF when the EDCAF determines that it shall initiate the transmission of a frame exchange sequence. Transmission initiation shall be determined according to the following rules:

## 10. Layer management

### 10.3 MLME SAP interface

#### 10.3.9 Reset

##### 10.3.9.1 MLME-RESET.request

###### 10.3.9.1.4 Effect of receipt

*Insert the following text at the end of 10.3.9.1.4:*

If dot11OCBEnabled is true and if the SetDefaultMIB parameter is false, MAC operation shall resume in less than 2 TU after the STAAddress parameter is changed.

### 10.3.29 Vendor-specific action

*Change the sentence as follows:*

This set of primitives supports the signaling of Vendor Specific Action frames ~~among~~between peer SMEs.

#### 10.3.29.1 MLME-VSPECIFIC.request

##### 10.3.29.1.1 Function

*Change the sentence as follows:*

This primitive requests transmission of a Vendor Specific Action frame ~~to a peer entity~~.

##### 10.3.29.1.2 Semantics of the Service Primitive

*Change the parameter list and the first and second rows of the table as follows:*

The primitive parameters are as follows:

```
MLME-VSPECIFIC.request(
    PeerMACAddress,
    OUIOrganization Identifier,
    VendorSpecificContent
)
```

Name	Type	Valid range	Description
PeerMACAddress	MACAddress	Any valid individual <u>or group</u> MAC address	The address of the peer MAC entity <u>or group of entities</u> to which the Vendor Specific Action frame is sent.
<del>OUI</del> <u>Organization Identifier</u>	<del>3 octets</del> As defined in <u>7.3.1.31</u>	<del>00-00-00 to FF-FF-FF</del> As defined in 7.3.1.31	<del>A</del> <u>Contains a</u> public value assigned by the IEEE to identify the <del>entity</del> <u>organization</u> that has defined the content of the particular vendor-specific action.

##### 10.3.29.1.3 When Generated

*Change the sentence as follows:*

This primitive is generated by the SME to request that a Vendor Specific Action frame be sent ~~to a peer entity~~.

##### 10.3.29.1.4 Effect of Receipt

*Change the sentence as follows:*

On receipt of this primitive, the MLME constructs a Vendor Specific Action frame containing the set of information elements and vendor-specific fields. The STA then attempts to transmit the frame ~~to the peer entity~~.

**10.3.29.2 MLME-VSPECIFIC.confirm**

**10.3.29.2.1 Function**

*Change the sentence as follows:*

This primitive reports the result of a request to send a Vendor Specific Action frame to the peer entity.

**10.3.29.3 MLME-VSPECIFIC.indication**

**10.3.29.3.2 Semantics of the Service Primitive**

*Change 10.3.29.3.2 as follows:*

The primitive parameters are as follows:

```
MLME-VSPECIFIC.indication(
    PeerMACAddress,
    OUOrganization Identifier,
    RCPI,
    VendorSpecificContent
)
```

*Change the first and second rows of the table and insert a row for “RCPI” before the “VendorSpecificContent” row as follows:*

NAME	TYPE	VALID RANGE	DESCRIPTION
PeerMACAddress	MACAddress	Any valid individual or group MAC address	The address of the peer MAC entity or group of entities from which the Vendor Specific Action frame was received.
<del>OU</del> Organization Identifier	<del>3-octets</del> As defined in 7.3.1.31	00-00-00 to FF-FF-FF As defined in 7.3.1.31	<del>A</del> Contains a public value assigned by the IEEE to identify the <del>entity</del> organization that has defined the content of the particular vendor-specific action.
<u>RCPI</u>	As defined in 7.3.2.38	As defined in 7.3.2.38	<u>Present when dot11OCBEnabled is true. RCPI is the measured value of received channel power on the received Vendor Specific Action frame.</u>

*Insert the following new subclauses (10.3.45 and 10.3.46) after the last subclause in 10.3, renumbering as necessary:*

**10.3.45 Get TSF timer**

This mechanism is used to request the current value of the TSF timer that the STA maintains.

### 10.3.45.1 MLME-GETTSFTIME.request

#### 10.3.45.1.1 Function

This primitive is generated by the SME to request that the MLME returns the value of its TSF timer. The value returned (as specified in 10.3.45.2.1) is the value of the TSF timer at the instant the MLME-GETTSFTIME.request primitive is received.

#### 10.3.45.1.2 Semantics of the service primitive

This primitive has no parameter.

```
MLME-GETTSFTIME.request(  
  
    )
```

#### 10.3.45.1.3 When generated

This primitive is generated by the SME to request the value of the TSF timer from the MLME.

#### 10.3.45.1.4 Effect of receipt

The MLME issues an MLME-GETTSFTIME.confirm.

### 10.3.45.2 MLME-GETTSFTIME.confirm

#### 10.3.45.2.1 Function

This primitive is generated by the MLME to report to the SME the result of a request to get the value of the TSF timer.

#### 10.3.45.2.2 Semantics of the service primitive

This primitive uses the following parameters:

```
MLME-GETTSFTIME.confirm(  
  
    ResultCode,  
    TSFtime  
    )
```

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, FAILURE	Reports the outcome of GETTSFTIME request if ResultCode is SUCCESS.
TSFtime	Integer	$0 - (2^{64} - 1)$	Value of the TSF timer.

#### 10.3.45.2.3 When generated

This primitive is generated by the MLME to report to the SME the result of an MLME-GETTSFTIME.request.

**10.3.45.2.4 Effect of receipt**

The SME is notified of the result of an MLME-GETTSFTIME.request primitive and, if successful, has the value of the TSF timer at the instant the MLME-GETTSFTIME.request was received by the MLME. If the result of an MLME-GETTSFTIME.request is failure, the TSFtime parameter is not included in the MLME-GETTSFTIME.confirm primitive.

NOTE—The TSF timer value can be used, along with other information, by the SME to compute an offset between an external time standard such as a version of Universal Coordinated Time (UTC) from a Global Positioning System (GPS) unit and the TSF timer.

**10.3.46 Timing Advertisement**

The Timing Advertisement primitives are used to communicate timing and other information from the higher layers or the SME of one STA to the higher layers or SME of other STAs.

**10.3.46.1 MLME-TIMING\_ADVERTISEMENT.request**

**10.3.46.1.1 Function**

This primitive is generated by the SME to request that the MLME generate a Timing Advertisement frame to transmit timing and optionally higher layer information.

**10.3.46.1.2 Semantics of the service primitive**

This primitive provides the following parameters:

```
MLME-TIMING_ADVERTISEMENT.request(
    PeerMACAddress,
    Capability Information,
    Country,
    Power Constraint,
    Time Advertisement,
    Extended Capabilities,
    VendorSpecificInfo
)
```

Name	Type	Valid range	Description
PeerMACAddress	MACAddress	Any valid individual or group MAC address	The address of the peer MAC entity or group of entities to which the Timing Advertisement frame is sent.
Capability Information	As defined in 7.3.1.4	As defined in 7.3.1.4	The announced capabilities of the STA.
Country	As defined in 7.3.2.9	As defined in 7.3.2.9	The information required to identify the regulatory domain in which the STA is located and to configure its PHY for operation in that regulatory domain. Present only when TPC functionality is required, as specified in 11.8 or when dot11MultiDomainCapabilityEnabled is true.

Name	Type	Valid range	Description
Power Constraint	As defined in 7.3.2.15	As defined in 7.3.2.15	Optional. The Power Constraint element contains the information necessary to allow a STA to determine the local maximum transmit power in the current channel.
Time Advertisement	As defined in 7.3.2.61	As defined in 7.3.2.61	Timing announced by the STA.
Extended Capabilities	As defined in 7.3.2.27	As defined in 7.3.2.27	Optional. The Extended Capabilities information element may be present if any of the fields in this element are non-zero.
Vendor-SpecificInfo	A set of information elements	As defined in 7.3.2.26	Zero or more information elements.

### 10.3.46.1.3 When generated

This primitive is generated by the SME to request that the MLME generates a Timing Advertisement frame for transmission.

### 10.3.46.1.4 Effect of receipt

Upon the receipt of this primitive, the MLME generates a Timing Advertisement frame for transmission.

### 10.3.46.2 MLME-TIMING\_ADVERTISEMENT.confirm

#### 10.3.46.2.1 Function

This primitive reports the result of an MLME-TIMING\_ADVERTISEMENT.request.

#### 10.3.46.2.2 Semantics of the service primitive

This primitive provides the following parameter:

MLME-TIMING\_ADVERTISEMENT.confirm(

ResultCode

)

Name	Type	Valid range	Description
ResultCode	Enumeration	SUCCESS, INVALID PARAMETERS	Reports the result of an MLME-TIMING_ADVERTISEMENT.request.

#### 10.3.46.2.3 When generated

This primitive is generated by the MLME in response to an MLME-TIMING\_ADVERTISEMENT.request.



**10.3.46.2.4 Effect of receipt**

The SME is notified of the result of a MLME-TIMING\_ADVERTISEMENT.request.

**10.3.46.3 MLME-TIMING\_ADVERTISEMENT. indication**

**10.3.46.3.1 Function**

This primitive is generated by the MLME to indicate to the SME the reception of a Timing Advertisement frame.

**10.3.46.3.2 Semantics of the service primitive**

This primitive provides the following parameters:

MLME-TIMING\_ADVERTISEMENT.indication(

Timestamp,  
Capability Information,  
Local Time,  
Country,  
Power Constraint,  
Time Advertisement,  
Extended Capabilities,  
RCPI,  
Source MAC address,  
VendorSpecificInfo  
)

Name	Type	Valid range	Description
Timestamp	Integer	N/A	The timestamp of the received frame.
Capability Information	As defined in 7.3.1.4	As defined in 7.3.1.4	The announced capabilities of the STA.
Local Time	Integer	N/A	Local Time is the value of a station’s TSF timer at the start of reception of the first octet of the timestamp field of the received Timing Advertisement frame.
Country	As defined in 7.3.2.9	As defined in 7.3.2.9	The information required to identify the regulatory domain in which the STA is located and to configure its PHY for operation in that regulatory domain. Present only when TPC functionality is required, as specified in 11.8 or when dot11MultiDomainCapabilityEnabled is true.
Power Constraint	As defined in 7.3.2.15	As defined in 7.3.2.15	The Power Constraint element contains the information necessary to allow a STA to determine the local maximum transmit power in the current channel.
Time Advertisement	As defined in 7.3.2.61	As defined in 7.3.2.61	Timing announced by the STA.

Name	Type	Valid range	Description
Extended Capabilities	As defined in 7.3.2.27	As defined in 7.3.2.27	The Extended Capabilities information element may be present if any of the fields in this element are non-zero.
RCPI	Integer as defined in 7.3.2.28	As defined in 7.3.2.28	RCPI is the measured value of received channel power on the received Timing Advertisement frame.
Source MAC Address	As defined in 7.1.3.3.5	As defined in 7.1.3.3.5	The SA field of the MAC header from the received Timing Advertisement frame.
Vendor-SpecificInfo	A set of information elements	As defined in 7.3.2.26	Zero or more information elements.

### 10.3.46.3.3 When generated

This primitive is generated by the MLME when a Timing Advertisement frame is received.

### 10.3.46.3.4 Effect of receipt

Upon the receipt of this primitive, the SME is notified that a Timing Advertisement frame has been received.

## 11. MLME

### 11.1 Synchronization

*Insert the following text into 11.1 as shown:*

All STAs within a single BSS shall be synchronized to a common clock using the mechanisms defined herein. A STA for which dot11OCBEnabled is true is not a member of a BSS, and therefore is not required to synchronize to a common clock or use these mechanisms.

#### 11.1.1 Basic approach

*Change 11.1.1 as follows:*

A Timing Synchronization Function (TSF) keeps the timers for all STAs in the same BSS synchronized. All STAs in which dot11OCBEnabled is false shall maintain a local TSF timer. STAs in which dot11OCBEnabled is true may maintain a TSF timer for purposes other than synchronization.

### 11.3 STA authentication and association

*Change 11.3 as follows:*

A STA for which dot11OCBEnabled is false keeps two state variables for each STA with which direct communication via the WM is needed:

- *Authentication state:* The values are unauthenticated and authenticated.
- *Association state:* The values are unassociated and associated.

A STA for which dot11OCBEnabled is true does not use MAC sublayer authentication or association and does not keep these state variables.

*Insert the following new subclauses, 11.19 and 11.20, after the last subclause in Clause 11, renumbering as necessary:*

### **11.19 STAs communicating data frames outside the context of a BSS**

When dot11OCBEnabled is true in a STA:

- a) Synchronization, authentication, association, and frame classes as defined in 11.1 and 11.3 are not used. Data confidentiality as defined in Clause 8 is not used. The STA may send management frames of subtype Action and, if the STA maintains a TSF Timer, subtype Timing Advertisement.
- b) The STA may send control frames, except those of subtype PS-Poll, CF-End, and CF-End + CF-Ack.
- c) The STA may send data frames of subtype Data, Null, QoS Data, and QoS Null.
- d) The STA shall set the BSSID field in all management and data frames to the wildcard BSSID value.

When a STA joins a BSS, it shall set dot11OCBEnabled to FALSE. The STA shall keep dot11OCBEnabled false while joined with the BSS or while the STA is the AP within a BSS. If a STA does not include the dot11OCBEnabled MIB attribute, the STA shall operate as if the attribute is false.

Whenever MAC and PHY sublayer parameters are changed in a STA in which dot11OCBEnabled is true, MAC and PHY sublayer operation shall resume with the appropriate MIB attributes in less than 2 TU.

A STA shall use information from the CF Parameter Set element of all received Beacon frames, without regard for the BSSID, to update its NAV as specified in 9.3.2.2.

### **11.20 Timing Advertisement**

#### **11.20.1 Introduction**

A STA that sends a Timing Advertisement frame shall maintain a TSF Timer in order to set the Timestamp field in this frame. When a STA transmits the Timing Advertisement frame, the Timestamp shall be set to the value of the STA's TSF timer at the time that the data symbol containing the first bit of the Timestamp is transmitted to the PHY plus the transmitting STA's delays through its local PHY from the MAC-PHY interface to its interface with the WM [e.g., antenna, light emitting diode (LED) emission surface].

A STA can advertise a time standard by transmitting a Timing Advertisement frame, which includes the Time Advertisement information element. As defined in 7.3.2.61 the Time Advertisement information element contains two estimates. The Time Value field contains an estimate of the difference between a time standard and the timestamp included in the same frame. The Time Error field contains an estimate of the standard deviation of the error in the estimate in the Time Value field. The time standard can be derived from an external time source. A STA with an external time source can implement an estimator in a variety of ways, which are beyond the scope of this standard.

#### **11.20.2 Timing Advertisement Frame Procedures**

The SME provides the Time Advertisement information element to the MLME when it requests the MLME to send a Timing Advertisement frame. When a Timing Advertisement frame is received by a STA, its MLME reports the Timestamp, Local Time, Time Advertisement information element, and estimates of propagation delay to the SME. For a STA that maintains a TSF Timer and receives a Timing Advertisement frame, Local Time is the value of the STA's TSF timer at the start of reception of the first octet of the

Timestamp field of the frame. Otherwise, the Local Time is unspecified. The receiving STA's SME can use the Timestamp, Local Time, and Time Advertisement information element to align its estimate of the time standard to the transmitting STA's estimate of the corresponding time standard.

## 17. Orthogonal frequency division multiplexing (OFDM) PHY specification for the 5 GHz band

### 17.3 OFDM PLCP sublayer

#### 17.3.10 PMD receiver specifications

##### 17.3.10.2 Adjacent channel rejection

*Insert the following new paragraph and table, Table 17-13a, at the end of 17.3.10.2, renumbering as necessary:*

An optional enhanced performance specification is provided for systems requiring improved immunity to out-of-channel interfering emissions. If a STA has dot11ACRType equal to 2, the adjacent channel rejection shall be no less than specified in Table 17-13a. The interfering signal in the adjacent channel shall be a conformant OFDM signal, using transmit mask M (see Figure I.2), unsynchronized with the signal in the channel under test. The corresponding minimum receiver sensitivities for each modulation and coding rate are the same as in Table 17-13.

NOTE—Transmit mask M is equivalent to mask C.

**Table 17-13a—Optional enhanced receiver performance requirements**

Modulation	Coding rate (R)	Adjacent channel rejection (dB)	Nonadjacent channel rejection (dB)
BPSK	1/2	28	42
BPSK	3/4	27	41
QPSK	1/2	25	39
QPSK	3/4	23	37
16-QAM	1/2	20	34
16-QAM	3/4	16	30
64-QAM	2/3	12	26
64-QAM	3/4	11	25

##### 17.3.10.3 Nonadjacent channel rejection

*Insert the following paragraph at the end of 17.3.10.3:*

An optional enhanced performance specification is provided for systems requiring improved immunity to out-of-channel interfering emissions. If a STA has dot11ACRType equal to 2, the nonadjacent channel

rejection shall be no less than specified in Table 17-13a. The interfering signal in the nonadjacent channel shall be a conformant OFDM signal, using transmit mask M (see Figure I.2), unsynchronized with the signal in the channel under test. The corresponding minimum receiver sensitivities for each modulation and coding rate are the same as in Table 17-13.

## 17.4 OFDM PLME

### 17.4.1 PLME\_SAP sublayer management primitives

*Insert the following row at the end of Table 17-14:*

**Table 17-14—MIB attribute default values/ranges**

Managed object	Default value/range	Operational semantics
<b>dot11 PHY OFDM Table</b>		
dot11ACRType	Implementation dependent	Dynamic

## Annex A

(normative)

### Protocol Implementation Conformance Statement (PICS) proforma

#### A.4 PICS proforma—IEEE Std 802.11-2007<sup>2</sup>

##### A.4.3 IUT Configuration

*Insert the following rows in the appropriate places in A.4.3:*

Item	IUT configuration	References	Status	Support
*CF2.1	Independent station operating outside the context of a BSS (dot11OCBEnabled is true)	11.19	(not CF17):O, CF17:M	Yes <input type="checkbox"/> No <input type="checkbox"/>
*CF17	5.9 GHz band	Annex J	CF6:O	Yes <input type="checkbox"/> No <input type="checkbox"/>

##### A.4.4.1 MAC protocol capabilities

*Change the following rows in A.4.4.1 as shown:*

Item	Protocol capability	References	Status	Support
PC1	Authentication service	5.4.3.1, 5.4.3.2, 8.1, <u>11.19</u> , Annex C	<u>(not CF2.1)</u> :M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
PC14	Association and reassociation	5.4, 11.3, 11.3.2, <u>11.19</u> , Annex C	<u>(not CF2.1)</u> :M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>

<sup>2</sup>Copyright release for PICS proforma: Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

*Change the following rows in A.4.4.1:*

Item	Protocol capability	References	Status	Support
PC11	Timing synchronization function (TSF)	11.1, Annex C	<u>(not CF2.1):M</u> , <u>CF2.1:O</u>	Yes <input type="checkbox"/> No <input type="checkbox"/>
PC11.4	TSF synchronization and accuracy	<u>11.1.1</u> , 11.1.2	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
PC11.9	Probe response	11.1.3	M	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
<u>PC38</u>	<u>Dot11OCBEnabled is false when STA is a BSS member</u>	<u>11.19</u>	<u>M</u>	<u>Yes</u> <input type="checkbox"/> <u>No</u> <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>

#### A.4.4.2 MAC frames

*Change the following rows in A.4.4.2 as shown:*

Item	MAC frame	References	Status	Support
FT1	Association request	Clause 7	CF2 & <u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT3	Reassociation request	Clause 7	CF2 & <u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT5	Probe request	Clause 7	CF2 & <u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT6	Probe response	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT7	Beacon	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT8	ATIM	Clause 7	CF2 & <u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT9	Disassociation	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT10	Authentication	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT11	Deauthentication	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FT12	Power save (PS)-Poll	Clause 7	CF2 & <u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FR2	Association response	Clause 7	CF2 & <u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FR4	Reassociation response	Clause 7	CF2 & <u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FR5	Probe request	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FR6	Probe response	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FR7	Beacon	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FR8	ATIM	Clause 7	CF2 & <u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>
FR9	Disassociation	Clause 7	<u>(not CF2.1):M</u>	Yes <input type="checkbox"/> No <input type="checkbox"/> <u>N/A</u> <input type="checkbox"/>

Item	MAC frame	References	Status	Support
FR10	Authentication	Clause 7	(not CF2.1):M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
FR11	Deauthentication	Clause 7	(not CF2.1):M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
FR16	CF-End	Clause 7	(not CF2.1):M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
FR17	CF End+CF-Ack	Clause 7	(not CF2.1):M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
FR19	Data + CF-Ack	Clause 7	(not CF2.1):M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>

*Insert two new rows at the end of A.4.4.2 as follows:*

Item	MAC Frame	References	Status	Support
FT26	Timing Advertisement frame	Clause 7	O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
FR26	Timing Advertisement frame	Clause 7	O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>

#### A.4.4.4 MAC addressing function

*Insert two new rows at the end of A.4.4.4 as follows:*

Item	MAC addressing function	References	Status	Support
AD4	Wildcard BSSID	7.1.3.3.3, 7.2.2	CF2.1:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
AD5	MAC and PHY operation resumes with appropriate MIB attributes in less than 2 TU	11.19	CF2.1:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>

#### A.4.8 OFDM PHY functions

*Insert the following new rows into A.4.8:*

Item	Feature	References	Status	Support
<b>OF3: PMD Operating Specification General</b>				
*OF3.2.8	5.9 GHz band	Annex J	CF17:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF3.3.16	5.9 GHz band (10 MHz channel spacing)	Annex J	CF17:O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF3.3.17	5.9 GHz band (20 MHz channel spacing)	Annex J	CF17:O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF3.3.18	5.9 GHz band (5 MHz channel spacing)	Annex J	CF17:O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>



Item	Feature	References	Status	Support
<b>OF4: PMD Transmit Specification</b>				
OF4.1.4a	Power Level (5.850–5.925 GHz), Class A	I.2.3	CF17:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF4.1.4b	Power Level (5.850–5.925 GHz), Class B	I.2.3	CF17:O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF4.1.4c	Power Level (5.850–5.925 GHz), Class C	I.2.3	CF17:O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF4.1.4d	Power Level (5.850–5.925 GHz), Class D	I.2.3	CF17:O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF4.15a	Spectrum mask, Class A (10 MHz channel spacing)	I.2.3	OF4.1.4a:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF4.15b	Spectrum mask, Class B (10 MHz channel spacing)	I.2.3	OF4.1.4b:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF4.15c	Spectrum mask, Class C (10 MHz channel spacing)	I.2.3	OF4.1.4c:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF4.15d	Spectrum mask, Class D (10 MHz channel spacing)	I.2.3	OF4.1.4d:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF5.2.1	Optional adjacent channel rejection	17.3.10.2	O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>
OF5.3.1	Optional nonadjacent channel rejection	17.3.10.3	O	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>

#### A.4.15 QoS enhanced distributed channel access (EDCA)

*Insert the following new row at the end of A.4.15:*

Item	Protocol capability	References	Status	Support
QD8	Default EDCA parameters for communications outside context of BBS	7.3.2.29, 9.9.1.2	CF2.1:M	Yes <input type="checkbox"/> No <input type="checkbox"/> N/A <input type="checkbox"/>

## Annex D

(normative)

### ASN.1 encoding of the MAC and PHY MIB

*In the dotStationConfig TABLE of Annex D, change the dot11StationConfigEntry sequence list as follows:*

Dot11StationConfigEntry ::=

SEQUENCE {

dot11StationID	MacAddress,
dot11MediumOccupancyLimit	INTEGER,
dot11CFPollable	TruthValue,
dot11CFPPeriod	INTEGER,
dot11CFPMaxDuration	INTEGER,
dot11AuthenticationResponseTimeOut	Unsigned32,
dot11PrivacyOptionImplemented	TruthValue,
dot11PowerManagementMode	INTEGER,
dot11DesiredSSID	OCTET STRING,
dot11DesiredBSSType	INTEGER,
dot11OperationalRateSet	OCTET STRING,
dot11BeaconPeriod	INTEGER,
dot11DTIMPeriod	INTEGER,
dot11AssociationResponseTimeOut	Unsigned32,
dot11DisassociateReason	INTEGER,
dot11DisassociateStation	MacAddress,
dot11DeauthenticateReason	INTEGER,
dot11DeauthenticateStation	MacAddress,
dot11AuthenticateFailStatus	INTEGER,
dot11AuthenticateFailStation	MacAddress,
dot11MultiDomainCapabilityImplemented	TruthValue,
dot11MultiDomainCapabilityEnabled	TruthValue,
dot11CountryString	OCTET STRING,
dot11SpectrumManagementImplemented	TruthValue,
dot11SpectrumManagementRequired	TruthValue,
dot11RSNAOptionImplemented	TruthValue,
dot11RSNAPreauthenticationImplemented	TruthValue,
dot11RegulatoryClassesImplemented	TruthValue,
dot11RegulatoryClassesRequired	TruthValue,
dot11QosOptionImplemented	TruthValue,
dot11ImmediateBlockAckOptionImplemented	TruthValue,
dot11DelayedBlockAckOptionImplemented	TruthValue,
dot11DirectOptionImplemented	TruthValue,
dot11APSDOptionImplemented	TruthValue,
dot11QAckOptionImplemented	TruthValue,
dot11QBSSLoadOptionImplemented	TruthValue,
dot11QueueRequestOptionImplemented	TruthValue,
dot11TXOPRequestOptionImplemented	TruthValue,
dot11MoreDataAckOptionImplemented	TruthValue,
dot11AssociateinQBSS	TruthValue,

```

dot11DLsAllowedInQBSS TruthValue,
dot11DLsAllowed TruthValue,
dot11AssociateStation MacAddress,
dot11AssociateID INTEGER,
dot11AssociateFailStation MacAddress,
dot11AssociateFailStatus INTEGER,
dot11ReassociateStation MacAddress,
dot11ReassociateID INTEGER,
dot11ReassociateFailStation MacAddress,
dot11ReassociateFailStatus INTEGER,
dot11RadioMeasurementCapable TruthValue,
dot11RadioMeasurementEnabled TruthValue,
dot11RRMMeasurementProbeDelay INTEGER,
dot11RRMMeasurementPilotPeriod INTEGER,
dot11RRMLinkMeasurementEnabled TruthValue,
dot11RRMNeighborReportEnabled TruthValue,
dot11RRMParallelMeasurementsEnabled TruthValue,
dot11RRMRepeatedMeasurementsEnabled TruthValue,
dot11RRMBeaconPassiveMeasurementEnabled TruthValue,
dot11RRMBeaconActiveMeasurementEnabled TruthValue,
dot11RRMBeaconTableMeasurementEnabled TruthValue,
dot11RRMBeaconMeasurementReportingConditionsEnabled TruthValue,
dot11RRMFrameMeasurementEnabled TruthValue,
dot11RRMChannelLoadMeasurementEnabled TruthValue,
dot11RRMNoiseHistogramMeasurementEnabled TruthValue,
dot11RRMStatisticsMeasurementEnabled TruthValue,
dot11RRMLCIMEasurementEnabled TruthValue,
dot11RRMLCIAzimuthEnabled TruthValue,
dot11RRMTransmitStreamCategoryMeasurementEnabled TruthValue,
dot11RRMTriggeredTransmitStreamCategoryMeasurementEnabled TruthValue,

dot11RRMAPChannelReportEnabled TruthValue,
dot11RRMMIBEnabled TruthValue,
dot11RRMMaxMeasurementDuration Unsigned32,
dot11RRMNonOperatingChannelMaxMeasurementDuration Unsigned32,
dot11RRMMeasurementPilotTransmissionInformationEnabled TruthValue,
dot11RRMMeasurementPilotCapability Unsigned32,
dot11RRMNeighborReportTSFOffsetEnabled TruthValue,
dot11RRMRCPIMEasurementEnabled TruthValue,
dot11RRMRSNIMEasurementEnabled TruthValue,
dot11RRMBSSAverageAccessDelayEnabled TruthValue,
dot11RRMBSSAvailableAdmissionCapacityEnabled TruthValue,
dot11RRMAntennaInformationEnabled TruthValue,
dot11FastBSSTransitionImplemented TruthValue,
dot11LCIDSEImplemented TruthValue,
dot11LCIDSERequired TruthValue,
dot11DSERequired TruthValue,
dot11ExtendedChannelSwitchEnabled TruthValue,
dot11RSNAProtectedManagementFramesEnabled TruthValue,
dot11RSNAUnprotectedManagementFramesAllowed TruthValue,
dot11AssociationPingResponseTimeout Unsigned32,
dot11AssociationMaximumPingAttempts INTEGER,
dot11HighThroughputOptionImplemented TruthValue,
dot11OCBEnabled TruthValue }

```

***Insert the following elements at the end of the dot11StationConfigEntry element definitions:***

dot11OCBEnabled OBJECT-TYPE

```

    SYNTAX TruthValue
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "A STA uses the defined outside the context of a BSS pro-
        cedures if and only if this attribute is true. The
        default value of this attribute is false."
    DEFVAL { false }
 ::= { dot11StationConfigEntry 102 }

```

***In dot11PhyOFDM TABLE, change Dot11PhyOFDMEntry as follows:***

```

Dot11PhyOFDMEntry ::=
    SEQUENCE { dot11CurrentFrequency          INTEGER,
               dot11TIThreshold              Integer32,
               dot11FrequencyBandsSupported  INTEGER,
               dot11ChannelStartingFactor     Integer32,
               dot11FiveMHzOperationImplem-  TruthValue,
               dot11TenMHzOperationImplem-   TruthValue,
               dot11TwentyMHzOperationImple- TruthValue,
               dot11PhyOFDMChannelWidth      INTEGER,
               dot11STATransmitPowerClass    Unsigned32,
               dot11ACRType                  Unsigned32 }

```

***In dot11PhyOFDM TABLE, insert the following definitions after dot11ChannelStartingFactor as shown:***

```

dot11STATransmitPowerClass OBJECT-TYPE
    SYNTAX Unsigned32 {Class A(1),Class B(2),Class C(3),Class D(4)}
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "The station transmit power class: Class A=1, Class B=2,
        Class C=3, Class D=4(as defined in I.2.2)."
    DEFVAL { 1 }
 ::= { dot11PhyOFDMEntry 12 }

```

```

dot11ACRType OBJECT-TYPE
    SYNTAX Unsigned32 { Table 17-13(1), Table 17-13a(2) }
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "This is a status variable.
        It is written by the SME.

        The Adjacent and Nonadjacent Channel Rejection performance:
        when this attribute = 1 the levels in Table 17-13 apply;
        when this attribute = 2 the levels in Table 17-13a apply."
    DEFVAL { 1 }
 ::= { dot11PhyOFDMEntry 13 }

```

# Annex I

(normative)

## Regulatory classes

### I.1 External regulatory references

*Change the list of documents for the United States in Table I.1 as shown:*

**Table I.1—Regulatory requirement list**

Geographic area	Approval standards	Documents	Approval authority
United States	Federal Communications Commission (FCC)	FCC 47 CFR [B8], Part 15, Sections 15.205, 15.209, and 15.247; and Subpart E, Sections 15.401–15.407, Section 90.210, <u>Sections 90.371–383</u> , Sections 90.1201–90.1217, 90.1301–90.1337, <u>Section 95.639</u> , <u>Sections 95.1501–1511</u>	FCC

*Insert one new emissions limits set in Table I.2, and change the numbering of the last row as shown:*

**Table I.2—Emissions limits sets**

Emissions limits set	United States	Europe	Japan
7 Intelligent Transportation Systems (ITS) radio service	FCC 47 CFR [B8], Sections 90.375, 90.377, 90.379, 95.639 and 95.1511	ETSI ES 202 663 [Ba], Clause 5, ETSI EN 302 571 [Bb], ETSI EN 301 893	Reserved
<del>7</del> –255	Reserved	Reserved	Reserved

*Insert two new behavior limits sets in Table I.3, and change the numbering of the last row as shown:*

**Table I.3—Behavior limits sets**

Behavior limits sets	United States	Europe	Japan
17 ITS non-mobile operations	FCC 47 CFR [B8], Sections 90.375, 90.379, and 90.377	ETSI ES 202 663 [Ba], Clause 5, ETSI EN 302 571 [Bb]	Reserved
18 ITS mobile operations	FCC 47 CFR [B8], Sections 95.639 and 95.1511	ETSI ES 202 663 [Ba], Clause 5, ETSI EN 302 571 [Bb]	Reserved
<del>16</del> <del>19</del> –255	Reserved	Reserved	Reserved

## I.2 Radio performance specifications

### I.2.1 Transmit and receive in-band and out-of-band spurious emissions

*Change the text in I.2.1 as shown:*

Spurious transmissions from compliant devices shall conform to national regulations. For operation in the United States, refer to the FCC 47 CFR 47 [B8], ~~Section 15.407~~ sections listed in Table I.2. For operation in Europe, refer to ETSI ES 202 663 [Ba] and ETSI EN 301 893-1. For operation in Japan, refer to MIC EO Article 49.20 and Article 49.21, Section 1.

### I.2.2 Transmit power levels

*Insert the following text at the end of the first paragraph of I.2.2 (prior to Table I.4):*

The maximum allowable STA transmit power classifications for ITS non-mobile operations in the U.S. 5.85–5.925 GHz band are shown in Table I.5a.

*Insert a new entry at the end of Table I.4, for the USA 5.85–5.925 GHz frequency band, as follows:*

**Table I.4—Transmit power level by regulatory domain**

Frequency band (GHz)	United States (Maximum output power with up to 6 dBi antenna gain) (mW)	United States (EIRP)	Europe (EIRP)
5.85–5.925	760, power level at antenna input. Antenna gain greater than 6 dBi allowed although additional limitations apply per FCC 47 CFR [B8], Sections 90.375 and 95.1511. See also Table I.5a.	44.8 dBm (30 W). Additional limitations apply per FCC 47 CFR [B8], Sections 90.375 and 95.1511. See also Table I.5a.	33 dBm (2W). Additional limitations apply per ETSI ES 202 663 [Ba], Clause 5.

*Insert new Table I.5a immediately after Table I.5:*

**Table I.5a—Maximum STA transmit power classification for the 5.85–5.925 GHz band in the United States**

STA transmit power classification	Maximum STA transmit power (mW)	Maximum permitted EIRP (dBm)
A	1	23
B	10	23
C	100	33
D	760 Note that for this class higher power is permitted as long as the power level is reduced to this level at the antenna input and the emission mask specifications are met.	33 for non government 44.8 for government

### I.2.3 Transmit spectrum mask

*Insert the following text, tables, and figure at the end of I.2.3:*

For operation in the 5.85–5.925 GHz band in the United States, FCC 47 CFR [B8], Sections 90.377 and 95.1509, the transmitted spectrum shall be as follows:

- a) For any STA using 5 MHz channel spacing, the transmitted spectral density shall have a 0 dBr bandwidth not exceeding 4.5 MHz and shall not exceed the spectrum mask created using the permitted power spectral density levels listed in Table I.7 for the transmit power class of the STA.
- b) For any STA using 10 MHz channel spacing, the transmitted spectral density shall have a 0 dBr bandwidth not exceeding 9 MHz and shall not exceed the spectrum mask created using the permitted power spectral density levels listed in Table I.8 for the transmit power class of the STA.


**Table I.7—Spectrum mask data for 5 MHz channel spacing in the 5.85–5.925 GHz band in the United States**

STA transmit power class	Permitted power spectral density, dBr				
	± 2.25 MHz offset (±f1)	± 2.5 MHz offset (±f2)	± 2.75 MHz offset (±f3)	±5 MHz offset (±f4)	± 7.5 MHz offset (±f5)
Class A	0	-10	-20	-28	-40
Class B	0	-16	-20	-28	-40
Class C	0	-26	-32	-40	-50
Class D	0	-35	-45	-55	-65

**Table I.8—Spectrum mask data for 10 MHz channel spacing in the 5.85–5.925 GHz band in the United States**

STA transmit power class	Permitted power spectral density, dBr				
	$\pm 4.5$ MHz offset ( $\pm f1$ )	$\pm 5.0$ MHz offset ( $\pm f2$ )	$\pm 5.5$ MHz offset ( $\pm f3$ )	$\pm 10$ MHz offset ( $\pm f4$ )	$\pm 15$ MHz offset ( $\pm f5$ )
Class A	0	-10	-20	-28	-40
Class B	0	-16	-20	-28	-40
Class C	0	-26	-32	-40	-50
Class D	0	-35	-45	-55	-65

The transmit spectral mask is created and applied as shown in Figure I.2 about the channel center frequency ( $F_c$ ) defined by the channel starting frequency and channel number from the regulatory class. The 0 dBr level is the maximum power spectral density measured in the channel. The measurements of transmit spectral density are made using a 100 kHz resolution bandwidth and a 30 kHz video bandwidth.

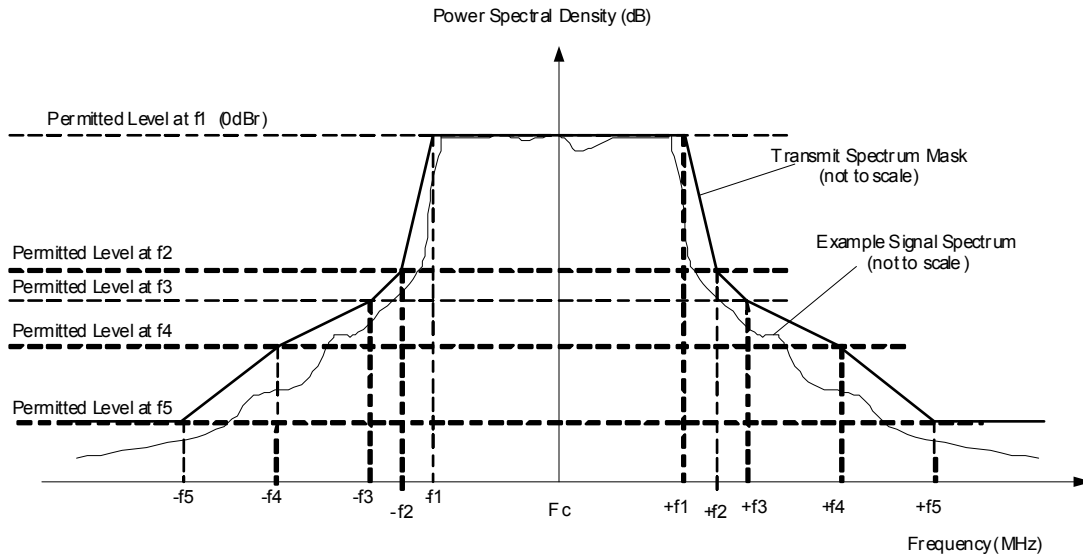

**Figure I.2—Transmit spectrum mask and application**



## Annex J

(normative)

### Country information element and regulatory classes

#### J.1 Country information and regulatory classes

*Insert three new entries and two footnotes to Table J.1 and change the numbering of the last row accordingly:*

**Table J.1—Regulatory classes in the United States**

Regulatory class	Channel starting frequency (GHz)	Channel spacing (MHz)	Channel set	Transmit power limit (mW)	Transmit power limit (EIRP)	Emissions limits set	Behavior limits set
16 <sup>a</sup>	5.0025	5	170–184	760	44.8 dBm	7	17, 18
17 <sup>a, b</sup>	5	10	171–184	760	44.8 dBm	7	17, 18
18 <sup>a, b</sup>	5	20	172–183	100	23 dBm	7	17, 18
<del>16</del> 19–21	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved

<sup>a</sup>This regulatory class specifies a list of channels in the 5.9 GHz band. Current regulations may only permit a subset of these channels.

<sup>b</sup>It is the responsibility of management layers outside the scope of this standard to ensure that channels in use at any location are non-overlapping.

*Insert four new entries and two footnotes to Table J.2 and change the numbering of the last row accordingly:*

**Table J.2—Regulatory classes in Europe**

Regulatory class	Channel starting frequency (GHz)	Channel spacing (MHz)	Channel set	Transmit power limit (mW)	Transmit power limit (EIRP)	Emissions limits set	Behavior limits set
13 <sup>a</sup>	5.0025	5	171–184	—	33 dBm	7	17, 18
14 <sup>a, b</sup>	5	10	171–184	—	33 dBm	7	17, 18
15 <sup>a, b</sup>	5	20	172–183	—	23 dBm	7	17, 18
16	5	20	100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140	—	30 dBm	7	1, 3, 4, 17, 18
<del>17</del> –255	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved

<sup>a</sup>This regulatory class specifies a list of channels in the 5.9 GHz band. Current regulations may only permit a subset of these channels.

<sup>b</sup>It is the responsibility of management layers outside the scope of this standard to ensure that channels in use at any location are non-overlapping.

## J.2 Band-specific operating requirements

*Insert the following new subclauses, J.2.2 and J.2.3, at the end of Annex J:*

### J.2.2 5.9 GHz band in the United States (5.850–5.925 GHz)

STAs operating under the behavior limits set 17 in Table I.3 are required to be registered with the FCC ULS. The registration includes the following:

- Classification by coverage size, which is defined by EIRP, and
- Identification of channels the STA is permitted to use.

STAs shall be classified for operation in this band by their maximum transmit power capability, as listed in Table I.5a in I.2.2. STAs shall be compliant with the spectral emission requirements for their class listed in I.2.3.

STAs shall have dot11OCBEnabled set to TRUE.

### J.2.3 5.9 GHz band in Europe (5.855–5.925 GHz)

STAs shall have dot11OCBEnabled set to TRUE.

## Annex P

(informative)

### Bibliography

#### P.1 General

*Insert the following entries in P.1, renumbering as necessary:*

[Ba] ETSI ES 202 663 V1.1.0 (2010-01), Intelligent Transport Systems (ITS); European profile standard for the physical and medium access control layer of Intelligent Transport Systems operating in the 5 GHz frequency band.

[Bb] ETSI EN 302 571 V1.1.1 (2008-09), Intelligent Transport Systems (ITS); Radiocommunications equipment operating in the 5 855 MHz to 5 925 MHz frequency band; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive.

[Bc] IEEE Standards Registration Authority—Frequently Asked Questions.<sup>3</sup>

---

<sup>3</sup>Available from the IEEE Standards Web site: <http://standards.ieee.org/regauth/faqs.html>.