

Corrections to “A Graphic Representation of the Necessary Condition for the MAFA Method”

Slawomir Cellmer 

IN THE above article [1], (37) should be corrected as follows:


$$\sigma = 0.01\lambda\sqrt{i^2 + j^2}$$

where λ is the wavelength and, i, j are the coefficients of the LC used in the previous stage of the cascade adjustment.

Fig. 2 should be corrected as shown below.

REFERENCES

- [1] S. Cellmer, “A graphic representation of the necessary condition for the MAFA method,” *IEEE Trans. Geosci. Remote Sens.*, vol. 50, no. 2, pp. 482–488, Feb. 2012, doi: [10.1109/TGRS.2011.2161321](https://doi.org/10.1109/TGRS.2011.2161321).

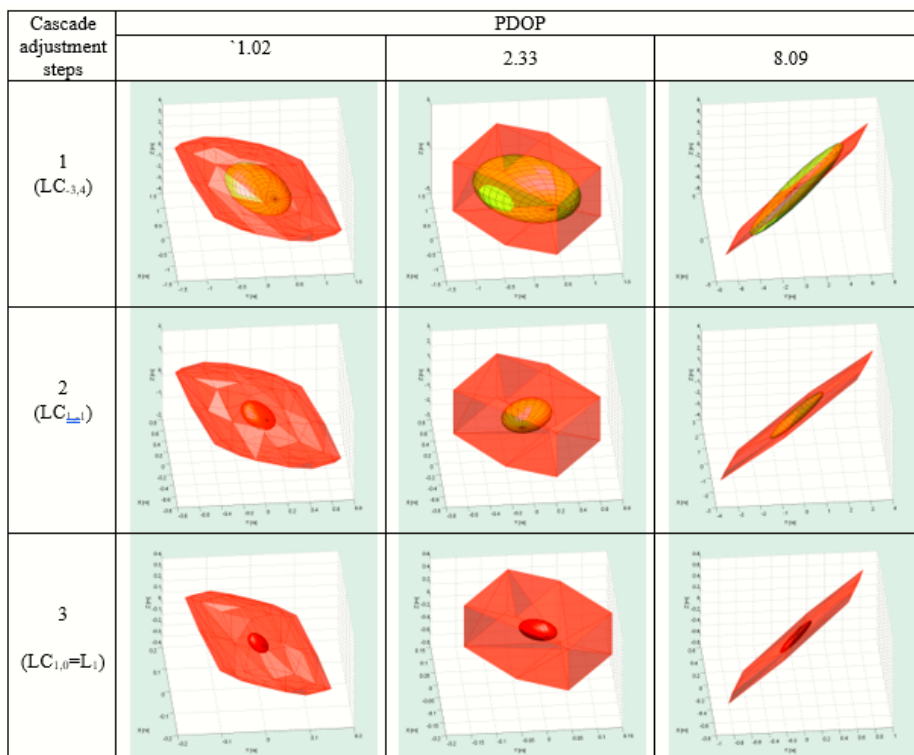

Manuscript received 14 February 2023; accepted 14 February 2023. Date of current version 24 February 2023. This work was supported by the Polish Ministry of Science and Higher Education under Grant N526 191937.

The author is with the Faculty of Geodesy and Land Management, University of Warmia and Mazury in Olsztyn, 10-720 Olsztyn, Poland (e-mail: slawomir.cellmer@gmail.com).

Digital Object Identifier [10.1109/TGRS.2023.3245779](https://doi.org/10.1109/TGRS.2023.3245779)

1558-0644 © 2023 IEEE. Personal use is permitted, but republication/redistribution requires IEEE permission. See <https://www.ieee.org/publications/rights/index.html> for more information.