

Errata

A Physics-Based Analytical Model for Perovskite Solar Cells

Xingshu Sun, *Student Member, IEEE*, Reza Asadpour, Wanyi Nie, Aditya D. Mohite,
and Muhammad Ashraful Alam, *Fellow, IEEE*

In [1], the sensitivity of absorber thickness on efficiency and fill factor in Fig. 3 was incorrect. The correction is shown below. These corrections do not influence any descriptions or conclusions in the paper.

The authors apologize for these errors and any consequent inconvenience to their readers.

REFERENCE

- [1] X. Sun, R. Asadpour, W. Nie, A. D. Mohite, and M. A. Alam, "A physics-based analytical model for perovskite solar cells," *IEEE J. Photovolt.*, vol. 5, no. 5, pp. 1389–1394, Sep. 2015.

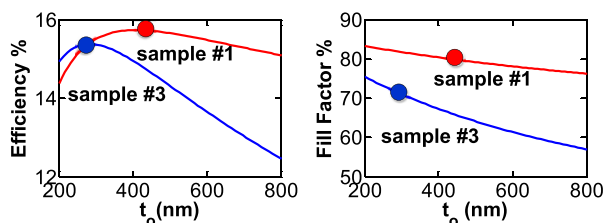


Fig. 3. (a) Efficiency versus absorber thickness for samples #1 and #3. (b) Fill factor versus absorber thickness for samples #1 and #3.

Manuscript received June 30, 2016; accepted July 7, 2016. Date of publication August 5, 2016; date of current version August 18, 2016. This work was supported by the U.S. Department of Energy under DOE Cooperative Agreement DE-EE0004946 ("PVMi Bay Area PV Consortium"), the National Science Foundation through the NCN-NEEDS program under Contract 1227020-EEC, and by the Semiconductor Research Corporation.

X. Sun, R. Asadpour, and M. A. Alam are with the School of Electrical and Computer Engineering, Purdue University, West Lafayette, IN 47907 USA (e-mail: sunxingshu@gmail.com; rasadpou@purdue.edu; alam@purdue.edu).

W. Nie and A. D. Mohite are with the Materials Physics and Application Division, Los Alamos National Laboratory, Los Alamos, NM 87545 USA (e-mail: wanyi@lanl.gov; amohite@lanl.gov).

Color versions of one or more of the figures in this paper are available online at <http://ieeexplore.ieee.org>

Digital Object Identifier 10.1109/JPHOTOV.2016.2589658