

Received September 13, 2019, accepted October 6, 2019, date of publication October 28, 2019, date of current version November 27, 2019.

Digital Object Identifier 10.1109/ACCESS.2019.2949527

# Antenna for Ultra-Wideband Applications With Non-Uniform Defected Ground Plane and Offset Aperture-Coupled Cylindrical Dielectric Resonators

CHEMSEDDINE ZEBIRI<sup>1,2</sup>, DJAMEL SAYAD<sup>3</sup>, ISSA T. E. ELFERGANI<sup>4</sup>,  
JAMAL SULIEMAN KOSHA<sup>2</sup>, WIDAD FARAJ A. MSHWAT<sup>2</sup>,  
CHAN HWANG SEE<sup>5</sup>, (Senior Member, IEEE), MOHAMED LASHAB<sup>6</sup>,  
JONATHAN RODRIGUEZ<sup>4</sup>, KHALIL H. SAYIDMARIE<sup>7</sup>, (Member, IEEE),  
HUTHAIFA A. OBEIDAT<sup>2</sup>, AND RAED A. ABD-ALHAMEED<sup>2,8</sup>, (Senior Member, IEEE)

<sup>1</sup>Department of Electronics, University of Ferhat Abbas, Sétif 19000, Algeria

<sup>2</sup>School of Electrical Engineering and Computer Science, University of Bradford, Bradford BD71DP, U.K.

<sup>3</sup>Department of Electrical Engineering, University of Skikda, Skikda 21000, Algeria

<sup>4</sup>Instituto de Telecomunicações, Campus Universitário de Santiago, 3810-193 Aveiro, Portugal

<sup>5</sup>School of Engineering and the Built Environment, Edinburgh Napier University, Edinburgh EH14 1DJ, U.K.

<sup>6</sup>Department of Electronics, University of Oum El Bouagui, Oum El Bouagui 4000, Algeria

<sup>7</sup>College of Electronic Engineering, Ninevah University, Mosul 41002, Iraq

<sup>8</sup>Information and Communication Engineering Department, Basrah University College of Science and Technology, Basrah 24001, Iraq

Corresponding author: Raed A. Abd-Alhameed (r.a.abd@bradford.ac.uk)

This work was supported in part by the European Union's Horizon 2020 Research and Innovation Program under Grant H2020-MSCA-ITN-2016 SECRET-722424, the Portuguese national funding agency for science, research and technology (FCT), the Portuguese Ministry of Education and Science (MEC) national funds, the PT2020 Partnership Agreement under Grant UID/EEA/50008/2019 and the U.K. Engineering and Physical Sciences Research Council (EPSRC) under Grant EP/E022936/1.

**ABSTRACT** A new compact Cylindrical Dielectric Resonator Antenna (CDRA) with a defected ground for ultra-wideband applications is presented. The structure is based on two cylindrical dielectric resonators asymmetrically located with respect to the center of an offset rectangular coupling aperture, with consideration of three and four Dielectric Resonators (DR). The resonant modes generated by the defected ground are studied and investigated. A parametric optimization study of the antenna design has been carried out to determine the optimal dimensions of the defected ground plane, resulting in an impedance bandwidth of over 133% that covers the frequency band from 3.6 GHz to 18.0 GHz. A power gain of about 7.9 dBi has been achieved. Design details and measured and simulated results are presented and discussed.

**INDEX TERMS** Cylindrical dielectric resonators antenna, ultra-wideband, defected ground structure.

## I. INTRODUCTION

Recently, the Defected Ground Structure (DGS) technique has received much attention in the design of microwave and millimeter wave sub-systems. It consists of etching variously shaped apertures in the ground plane to create a disturbance in the current distribution [1], [2]. For more than a decade, frequency-selective properties of DGSs have been widely used in printed circuits and antenna applications. DGS were first proposed for antenna applications in 2005 [3]. Among other benefits, the technique can reduce cross-polarization,

The associate editor coordinating the review of this manuscript and approving it for publication was Xiu Yin Zhang.

which constitutes a major drawback for some wideband antennas [4].

In recent studies, the DGS technique is mainly employed to improve the impedance bandwidth of patch antenna structures [1]. Similar topics were treated in [2], [4], [5]. This technique can also be used to reduce coupling [6], minimize the structure size, and excite additional resonance modes using simple and compact DGSs configurations [7], [8]. It can be used to achieve single-feed multi-frequency microstrip antennas, including multiband functions using various DGSs [9], [10]. Moreover, the use of DGS can also enhance the antenna gain [2], [11], [12]. In this context, DGSs of many shapes have been investigated, such as circles,

spirals, concentric rings, elliptical dumbbells and U and V slots [2]–[4]. Shapes such as rectangular, square, or semi-circular arcs [1] with varying dimensions can provide particular improvements in DGS-based antenna performances [4]. DGS has been used in controlling active microstrip antennas [4]. In [13] and [14], DGSs were used to design desired dual and triple band-notched UWB antennas. In [15], a shovel-shaped DGS was used in a simple and compact UWB planar monopole antenna with filtering characteristics. In [16], a simple CPW-fed monopole patch antenna surrounded with a coplanar ground plane was presented. Further modifications of the DGS was made to enhance the gain and impedance bandwidth [16]. This technique was extended to Dielectric Resonator Antennas (DRAs), where the mutual coupling between two circular microstrip patches was suppressed making use of the stop-band property of the proposed DGS.

DRAs have emerged as a novel radiation technology, with the advantage of having high efficiency. Consequently, special DRA shapes and multi-segment DRAs have been reviewed extensively. Rectangular [17], Conical [18], asymmetrical E [19], Stair-Shaped [20], Inverted L-shaped [21], elliptical [22], asymmetrical T-shaped [23], tetrahedral [24] with triangular slot [25], ring-shaped [4] cylindrical [2], [26]–[28], and hybrid hemispherical-conical-shaped [29] configurations have all been suggested for antenna bandwidth enhancement. Gain and bandwidth enhancement configurations were presented in [2] and [30], where two cylindrical dielectric resonators were asymmetrically placed around the center of the rectangular coupling aperture, and fed through this defected ground plane aperture. In [30], a parametric optimization study was carried out and a bandwidth of about 57% was achieved, covering 8.02 to 14.55 GHz with a 10 dBi power gain. These results are quite comparable to those found in [2], namely a bandwidth of about 54%, a frequency band from 8.5 to 14.7 GHz and a 12 dBi gain.

Currently, the operating bandwidth of antennas using DRAs has been further improved for ultra-wideband applications [29]–[31]. In [32], a mono-cylindrical Dielectric Resonator (DR) was fed using two crossed slots centered at different locations. The slot modes were considered partially independent from the DR mode; in consequence, a wide bandwidth is attained. In [2], [26] and [30], wideband slot-fed asymmetric DRAs analyses were presented, where two adjacent cylindrical dielectric resonators were placed asymmetrically around the rectangular feeding aperture. The asymmetrical locations provide a further optimization parameter in the DRA design. As a result, the proposed antenna parameters are significantly improved: a 29% impedance bandwidth, a 9.62 to 12.9 GHz frequency band and an 8 dBi realized gain were achieved [26].

The present paper extends our recent work [27], which presented a compact ultra-wideband DRA using two cylindrical dielectric resonators asymmetrically placed near the center of an offset rectangular coupling aperture; this resulted in a

62% bandwidth, covering the two bands 5.9 to 7.32 GHz and 8.72 to 16.57 GHz, with a gain of 8 dBi. Herein, using the same aperture concept, the relative bandwidth is increased up to 133.33% covering the frequency range from 3.6 to 18 GHz. This range covers C band (4 to 8 GHz), X band (8 to 12.4 GHz) and Ku band (12.4 to 18 GHz), comprising services such as earth-to-satellite bands at 5.9 to 6.4 GHz, 12.25 to 13.25 GHz and 14 to 14.5 GHz, connections for satellite-earth at 10.7 to 11.7 GHz, 10.5 GHz for police radar and, for commercial use, 10.7 to 13.2 GHz.

The current basic design is a defected ground plane microstrip-fed DRA obtained by modifying the initial design in [27] achieving further enhancements in impedance bandwidth and gain. Experimental and simulation results of the resulting novel antenna are presented and discussed. The present work mainly intended to improve our recently published work [27], where the bandwidth is improved twice by use of DGS technique. The novelty of this work, hence, lies in the combination of the DGS with the DRA structures.

## II. PROPOSED ANTENNA GEOMETRY AND SUMMARIZED RESULTS

The geometry of the basic monopole antenna design is shown in Fig. 1. A microstrip feed is used due to its impedance matching simplicity and other useful features [27]. The proposed asymmetric ultra-wideband antenna with a defected ground plane is designed and realized on an FR4  $30 \times 25 \times 0.8$  mm<sup>3</sup> substrate with relative permittivity  $\epsilon_{rs} = 4.4$  and 0.017 loss tangent. Two identical alumina-96%-DRs of radius  $D = 6$  mm and height  $h = 9$  mm have been used. A feeding microstrip line of length  $l_f = 20.5$  mm and width  $w_f = 1.5$  mm is located symmetrically around the coupling aperture. Its dimensions were calculated using empirical formulas [2], [26], [27], [30], [32].

Simulations for this geometry were carried out using HFSS software. Two identical rectangular apertures (slots) of length  $l_s$  and width  $w_s$  are etched on the ground plane, shifted from the center by a distance  $d$ . Based on the experimental results obtained in [27], a stub length close to  $\lambda_g/4$  is also used in this design, although this differs from that of [27] by including the ground plane apertures. The final antenna dimensions (Fig. 1) are  $w_f = 1.5$  mm,  $l_f = 20.5$  mm,  $w_s = 3.5$  mm,  $l_s = 6.6$  mm,  $d_s = 3.1$  mm and  $d = 0.2$  mm are optimized in our previous work [27], and the dimensions of the defected antenna are  $w_g = 16.25$  mm,  $l_g = 16.5$  mm,  $x_1 = 6.5$  mm,  $x_2 = 13.5$  mm,  $x_3 = 1.5$  mm,  $y_1 = 8.75$  mm,  $y_2 = 8.75$  mm and  $y_3 = 3.15$  mm.

## III. CHARACTERISTIC MODES DESCRIPTIONS

Building on previous works [2], [26], [30], [27], modifications are applied to the basic antenna according to the realization steps of our model shown in Fig. 2(a). The originality of this work lies in the creation of a defected ground plane for exciting further modes [2] and enhancing the bandwidth and gain. The segmentation of the ground plane improves the return loss  $S_{11}$  as illustrated in Fig. 2(b).

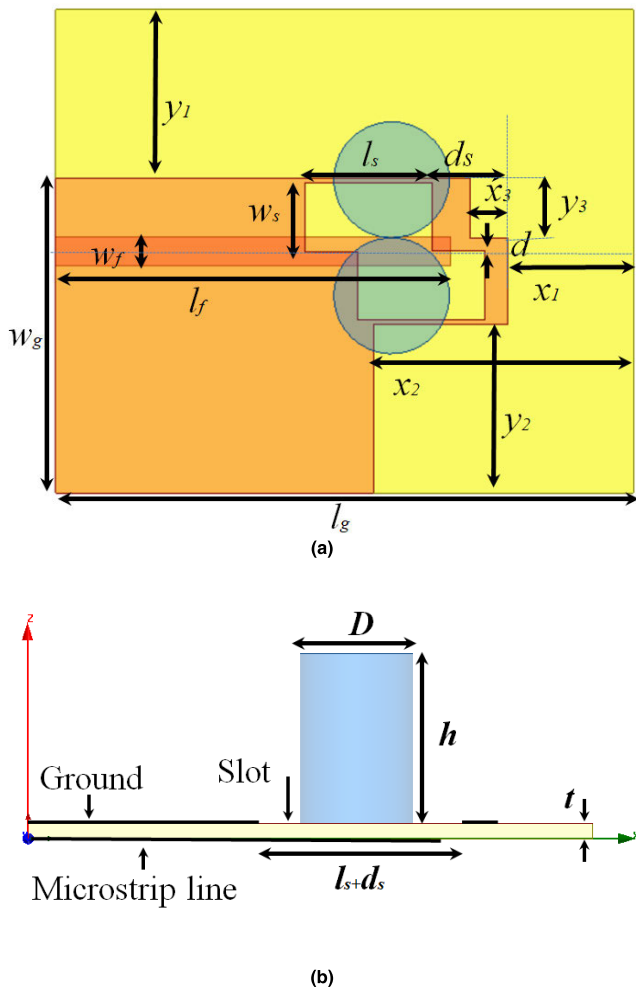


FIGURE 1. Design parameters of two aperture-coupled DRAs with non-uniform defected ground plane, (a) top view and (b) side view.

TABLE 1. Bandwidth of the five designs shown in Fig. (2.a).

Design	BW (GHz)	BW (%)
i[27]	5.9-7.4 and 9.1-17.8	22.56 and 64.68
ii	5.5-7.3 and 9-17.8	28.13 and 65.67
iii	5.6-7.6 and 8.3-17.8	30.30 and 72.79
iv	3.7-17.9	131.48
Prototype	3.6-18	133.33

As shown in Table 1, all four proposed designs (ii) to (v), presented in Fig. 2(a), have a bandwidth greater than that of antenna (i) presented in [27]. The application of the DGS technique has led to a single band extending from 3.6 to 18 GHz, *i.e.* a 133.33 % relative bandwidth. It should be noted that the major improvement achieved by this technique occurs below 10 GHz (3.6-10 GHz). The introduction of the defected ground to the slotted structure (Antenna (i) [27]) led to the appearance of other resonance frequencies between 3.6 and 6 GHz, and from 6 to 10 GHz due to the combined effect of the DRA and the slotted defected ground.

Although the existing literature clearly favors probe excitation at lower frequencies where coupling apertures are not often used due to their large size [33], [34], in our case, large

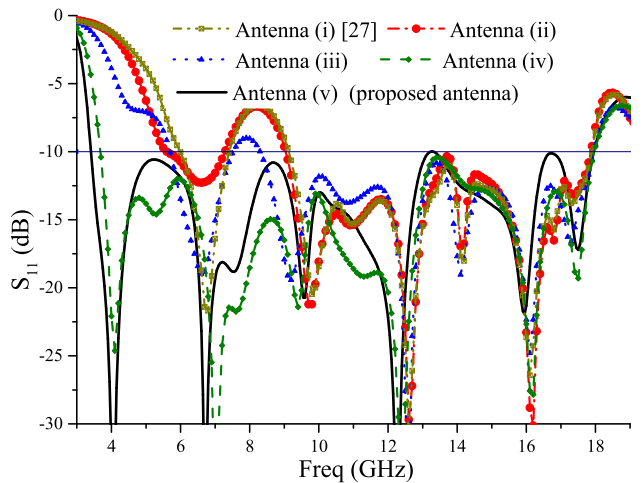
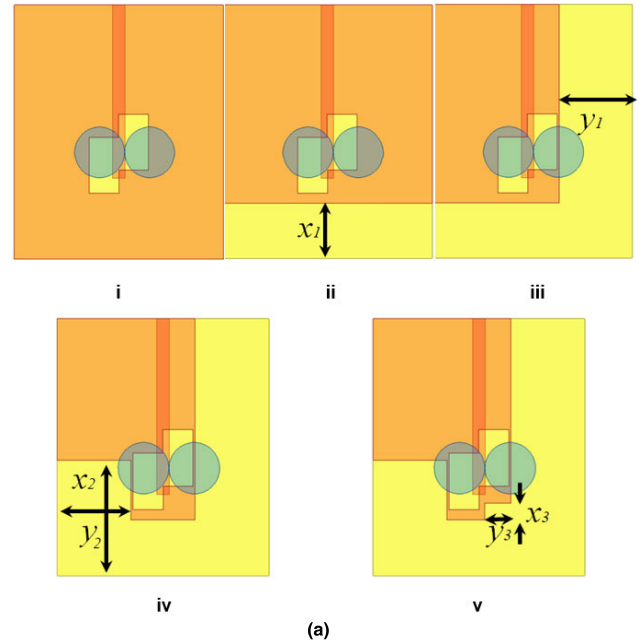


FIGURE 2. (a) Evolution of the proposed antenna, (i) the design of [27], (ii), (iii), (iv), (v) steps of design optimization. (b) simulated  $S_{11}$  of the five designs shown in (a).

slots, when combined with the DGS technique, has shown better excitation performances for a two DR structure. This combination is considered as the main novelty of this work.

Generally, isolated cylindrical DRAs support TE, TM and hybrid resonant modes [28], [35], [36], in a widely adopted designation. Amongst multiple cylindrical DRA modes, the  $TE_{01\delta}$ ,  $TM_{01\delta}$ , and hybrid  $HEM_{11\delta}$  (with dominant  $E_z$  component) modes are the most commonly considered radiating modes. The subscript numbers in the mode designation express the field variation in the azimuth, radial and axial directions, respectively. The index  $\delta$ , lying between 0 and 1, indicates the resonant behavior along the dielectric cylinder height ( $z$  axis). The  $TE_{01\delta}$  mode,  $TM_{01\delta}$  mode and  $HEM_{11\delta}$  mode radiate similarly to the short vertical magnetic dipole,

short vertical electric dipole and short horizontal magnetic dipole, respectively [36].

In our case, a large double slot is etched in the ground plane, resulting in multiple magnetic/electric modes over frequency. The slot has more effect depending on the frequency; it resonates at low frequencies exciting the DRA at 10 and 12, and up to 16 GHz, (Fig. 2).

Much research has focused on cylindrical DRAs [28], [37]–[40]. In [38] and [39], the DRA device is used as sensors for wireless networks and liquid chemical detection applications, respectively. In these structures, the TM and quasi-TM modes can be excited by placing the dielectric disk on the ground plane [41]. Little attention has been paid to the TE and quasi-TE modes, which cannot be excited when the base of the DRA is placed on the ground plane [42]. In [42], some DRA HEM<sub>11δ</sub> and HEM<sub>12δ</sub> mode features, compared to the most widely studied TM<sub>01δ</sub> and TE<sub>01δ</sub> modes, are briefly discussed. The resonant frequency  $f_o$  of the TE<sub>01δ</sub> mode, TM<sub>01δ</sub> mode, and HEM<sub>11δ</sub> are respectively given by the following empirical equations [36], [43], [44]:

$$f_{0/TE_{01\delta}} = \frac{2.327c}{2\pi \cdot a \cdot \sqrt{\epsilon_r + 1}} \times \left( 1 + 0.2123 \frac{a}{h} - 0.00898 \left( \frac{a}{h} \right)^2 \right) \quad (1)$$

$$f_{0/TM_{01\delta}} = \frac{c}{2\pi \cdot a \cdot \sqrt{\epsilon_r + 2}} \sqrt{3.83^2 + \left( \frac{\pi \cdot a}{2 \cdot h} \right)^2} \quad (2)$$

$$f_{0/HEM_{11\delta}} = \frac{6.324c}{2\pi \sqrt{\epsilon_r + 2}} \left( 0.27 + 0.36 \frac{a}{2h} + 0.02 \left( \frac{a}{2h} \right)^2 \right) \quad (3)$$

where  $\epsilon_r$  is the DR relative permittivity,  $a$  is the radius and  $h$  is the height of the dielectric cylinder. Note that there are neither exact mathematical expressions for the resonant frequencies of higher order modes nor exact solutions for their internal fields and radiation patterns [36]. An approximate solution for the cylindrical DRAs field pattern has been obtained by considering a magnetic wall boundary condition on the surfaces parallel to the  $z$  axis [45].

The slot length is calculated using the following [44]:

$$L = \frac{c}{2f_0} \sqrt{\frac{2}{\epsilon_r + \epsilon_{rs}}} \quad (4)$$

where  $\epsilon_r$  and  $\epsilon_{rs}$  are the relative dielectric constant of the DR and substrate, respectively. In [46], measurements of the cylindrical dielectric resonator HEM<sub>11δ</sub> mode radiation efficiency for  $\epsilon_r = 38$  show values better than 98%.

The slot in our case (with wide zigzag) has changed the shape of the magnetic current (magnetic dipole), and excited other modes at low frequencies (less than 10 GHz) (Fig. 2(b)). Equations (1-7) of the resonant frequency modes were derived from the calculations of the cylindrical dielectric resonator by considering perfect electric and/or magnetic walls on the resonator faces. The perfect magnetic wall condition was shown to be accurate for higher  $\epsilon_r$  values [47], but remains fairly valid for lower values.

The three first modes TE<sub>01δ</sub>, TM<sub>01δ</sub>, and HEM<sub>11δ</sub> resonant frequencies of the cylindrical resonator are given by the following empirical expressions [33]:

$$f_{0/TE_{01\delta}} = \frac{c \cdot 2.921}{2\pi \cdot a \cdot \epsilon_r^{0.456}} \times \left( 0.691 + 0.319 \frac{a}{2h} - 0.035 \left( \frac{a}{2h} \right)^2 \right) \quad (5)$$

$$f_{0/TM_{01\delta}} = \frac{c \cdot 2.933}{2\pi \cdot a \cdot \epsilon_r^{0.468}} \times \left( 1 - \left( 0.075 - 0.05 \frac{a}{2h} \right) \left( \frac{\epsilon_r - 10}{28} \right) \right) \times \left( 1.048 + 0.377 \left( \frac{a}{2h} \right) - 0.071 \left( \frac{a}{2h} \right)^2 \right) \quad (6)$$

$$f_{0/HEM_{11\delta}} = \frac{c \cdot 2.735}{2\pi \cdot a \cdot \epsilon_r^{0.436}} \times \left( 0.543 + 0.589 \frac{a}{2h} - 0.050 \left( \frac{a}{2h} \right)^2 \right) \quad (7)$$

where  $a$  and  $h$  are the DR radius and height, respectively.

The differences between these equations are clarified by an example in Table 2, as these equations do not include any information about the coupling factor or the quality factor of CDRA and the approximation is given with respect to ratio ( $a/h$ ).

TABLE 2. Bandwidth of the five designs shown in Fig. (2.a).

Design	BW (GHz)	BW (%)
Equ (1)/TE	1.2285e+10	
Equ (5)/TE	1.2437e+10	0.3177
Equ (2)/TM	1.8222e+10	
Equ (6)/TM	1.8193e+10	1.2171
Equ (3)/HEM	9.9366e+09	
Equ (7)/HEM	1.0484e+10	6.0101
Equ (7)/HEM	1.0484e+10	
Equ (8)/HEM	1.0630e+10	1.3728

The DRA resonant frequency can be controlled by varying the length of the slot, which may also help in reconfiguring the radiation patterns.

When a single shaped DRA operates in the fundamental mode, its bandwidth typically does not exceed 10% [48]. Experimental work on wide-band DRAs was described in 1989 by Kishk et al. [48] who proposed using two separate DRAs stacked end to end to achieve a dual-resonance band. Other wideband configurations using this technique have since been reported [49]–[51].

An alumina-96% based DRA ( $\epsilon_r = 9.4$ ) has been designed with a diameter  $D = 6$  mm and a height  $h = 9$  mm. The resonant frequency of a single segment CDRA excited in HEM<sub>11δ</sub> mode is given by [26], [27]

$$f_0 \text{ (GHz)} = \frac{c}{2\pi \cdot a \cdot \sqrt{\epsilon_r}} \left( 1.71 + \frac{a}{h} + 0.1578 \left( \frac{a}{2h} \right)^2 \right) \quad (8)$$

where  $a = D/2$  (in cm),  $c$  is the free space light velocity. For these dimensions, the calculated frequency is 10.63 GHz. The DRs are asymmetrically placed around the asymmetrical

slots, hence, the DRA modes depend on the DR geometrical parameters, the permittivity and the feeding mechanism. The asymmetric DR pair configuration and the dimensions and shape of the defected ground plane give designers more scope for functional optimization. In this study, a 133% impedance bandwidth, covering 3.6 GHz to 18.0 GHz, has been achieved.

Table 2 compares the results of the 7 equations mentioned above for  $a = 3$  mm,  $h = 9$  mm and  $\epsilon_r = 9.4$ . The resonant frequencies of dielectric resonators are determined using rigorous numerical methods [43].

According to  $\epsilon_r$  and  $a/h$ , closed-form expressions for different modes are obtained. The accuracy of the formulas presented above (Equations 1-8) is demonstrated for the same resonator parameters for which the results of rigorous numerical methods available in the literature are very close [43]. Let us conclude this part with a comparison of the size of our antenna with those realized or simulated available in the literature.


It is clear from Table 3 that our proposed structure presents a good compromise between miniaturization and the significant gain obtained compared to the reported studies.

**TABLE 3. Antenna dimensions and properties comparison with published data.**

Reference, Year	Total Area (mm <sup>2</sup> )	Operating bands(GHz)	Gain dBi
[23], 2012	60×60×13.6	3.81 to 8.39	3-24-7.75
[29], 2012	70×70×11	4-16	2-4
[18], 2013	100×100×20	3.5-10.5	4.25-8.3
[26], 2014	30×25×9.8	9.62-12.9	6-8
[19], 2016	50×50×5.8	6.0-10.2	4.5-8.1
[20], 2016	27×25×6.8	3.844-8.146	3-3.9
[30], 2016	30×25×9.8	9.1-14.6	6.2-8
[2], 2017	30×25×9.8	8.02-14.55	6-12
[21], 2017	44×44×10.8	3.76-9.35	5-8
[25], 2017	140×140×5.8	3.8-8.1	5.5 to 7.5
[27], 2017	30×25×9.8	5.9-7.32/8.7-15	6-12
[22], 2018	80×80×9	8.26 - 12.15	6.2-8.1
[28], 2019	120×120×12	2.33-2.52	6.2
Our proposed antenna	30×25×9.8	3.6-18	6-8


Fig. 3(a) shows the ground plane length effect on the reflection coefficient. It is clearly seen that it acts most strongly on frequencies below 10 GHz. In this case, the optimal value for  $x_1$  is 6.5 mm. The width of the second truncation ( $y_1$ ) is in the  $y$ -direction. It is noted that the effect is clearly visible in the frequency band 3-10 GHz. In this case, the impedance matching is better at  $y_1 = 8.75$  mm, where the mismatch between 7 and 10 GHz decreases with respect to  $y_1$  and is optimal for  $y_1 = 8.75$  mm for frequencies beyond 10 GHz, which are less affected by the truncation of the ground plane.

Fig. 3(b) shows that increasing  $x_2$  up to 13.5 mm improves the bandwidth. Beyond 17 mm, a mismatch is observed for lower frequencies. From Fig. 3(c), we note that for  $x_2 = 13.5$  mm with varying  $y_2$ , a further bandwidth improvement is obtained for  $y_2 = 8.75$  mm. In Fig. 3(d), the effect

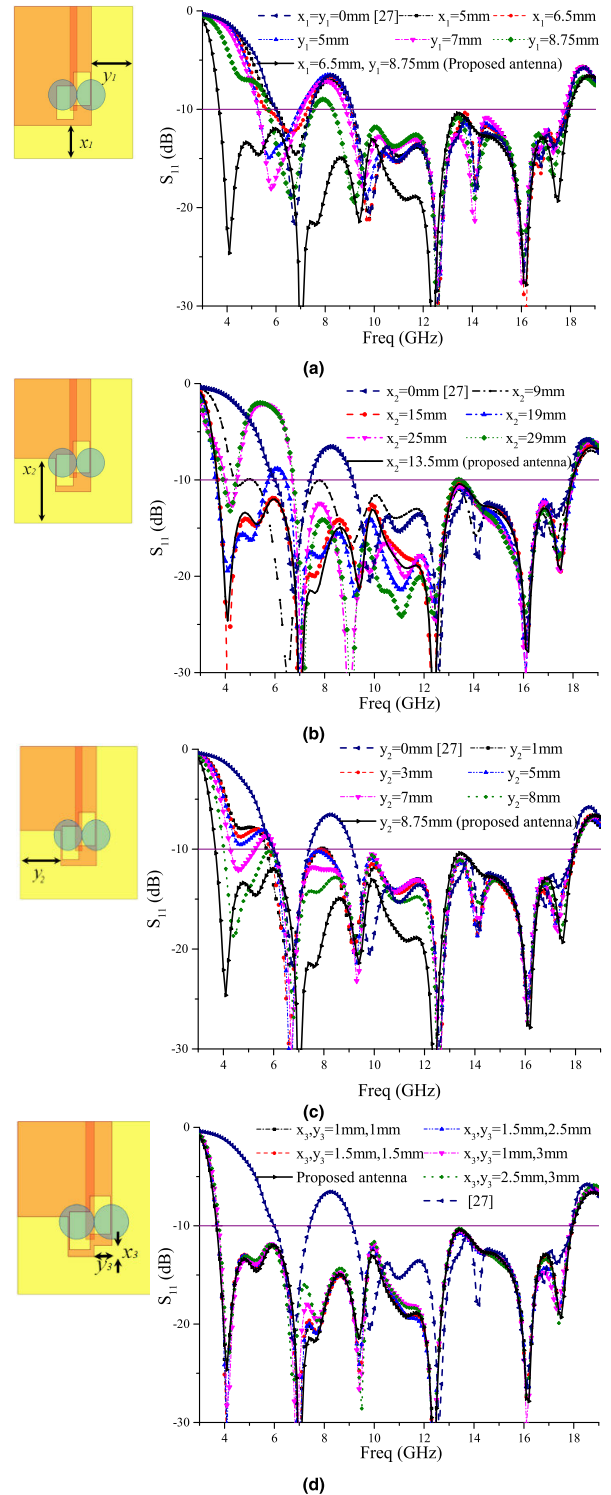


**FIGURE 3. Effect of different slit lengths on  $S_{11}$  of the aperture-coupled asymmetric DRA with DGS, compared with the proposed antenna and with the antenna in [27]. (a) Effect of slit length  $x_1$  ( $y_1 = 0$ mm) and the effect of the slit length  $y_1$  ( $x_1 = 6.5$ mm), (b) Effect of the slit length  $x_2$  ( $x_1 = 6.5$ mm and  $y_1 = y_2 = 8.75$ mm), (c) Effect of the slit length  $y_2$  with  $x_1 = 6.5$ mm,  $y_1 = 8.75$ mm and  $x_2 = 13.5$ mm, (d) Effect of the slit  $x_3 \times y_3$  with  $x_1 = 6.5$ mm,  $y_1 = 8.75$ mm and  $x_2 = 13.5$ mm.**

of the truncation  $x_3 \times y_3$  is not clearly visible, but in reality, a slight increase of 1% in bandwidth for  $x_3 \times y_3 = 1.5\text{mm} \times 3.15\text{mm}$  is obtained.

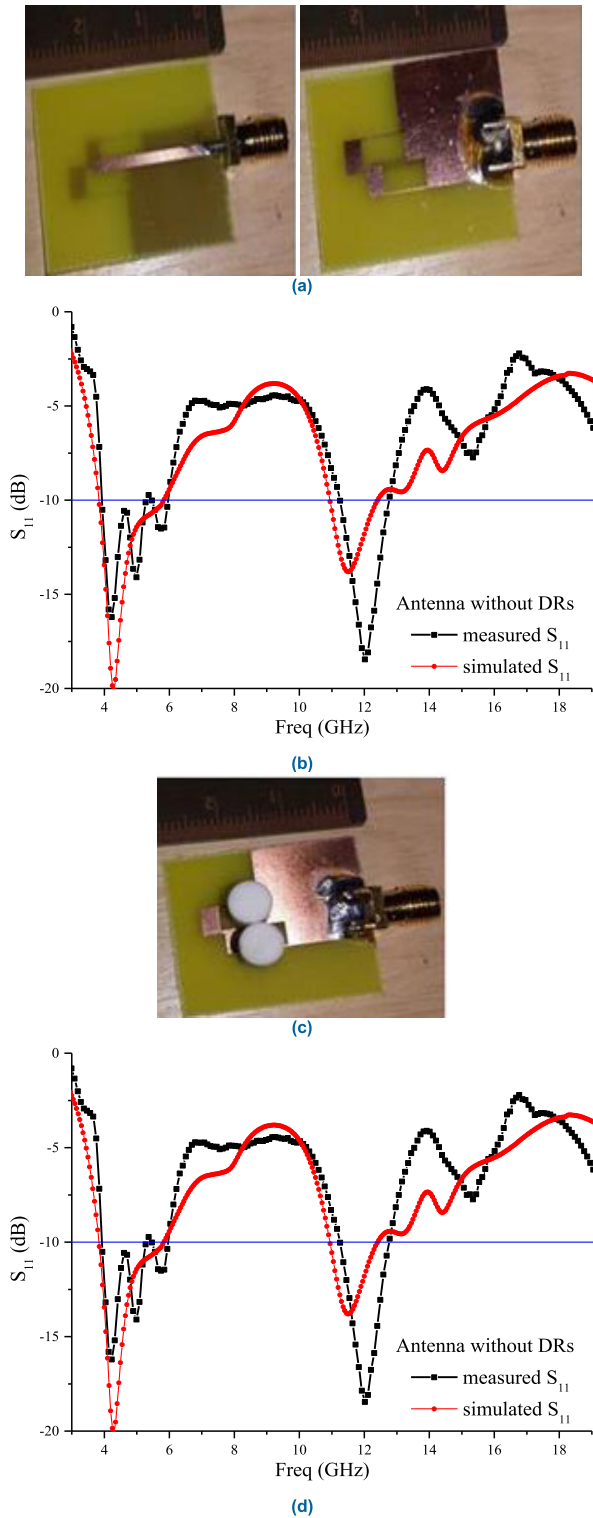

**FIGURE 4.** Proposed antenna. (a) antenna faces photograph without DR, (b) Measured and simulated reflection coefficient of the antenna without DR (c) our proposed antenna photograph with two DRs, (d) Measured and simulated reflection coefficient of the proposed antenna with DR (with glue of various thicknesses t).

To validate the simulated results, an antenna prototype is constructed as shown in Fig. 4(a), and its parameters were measured using a vector network analyzer.

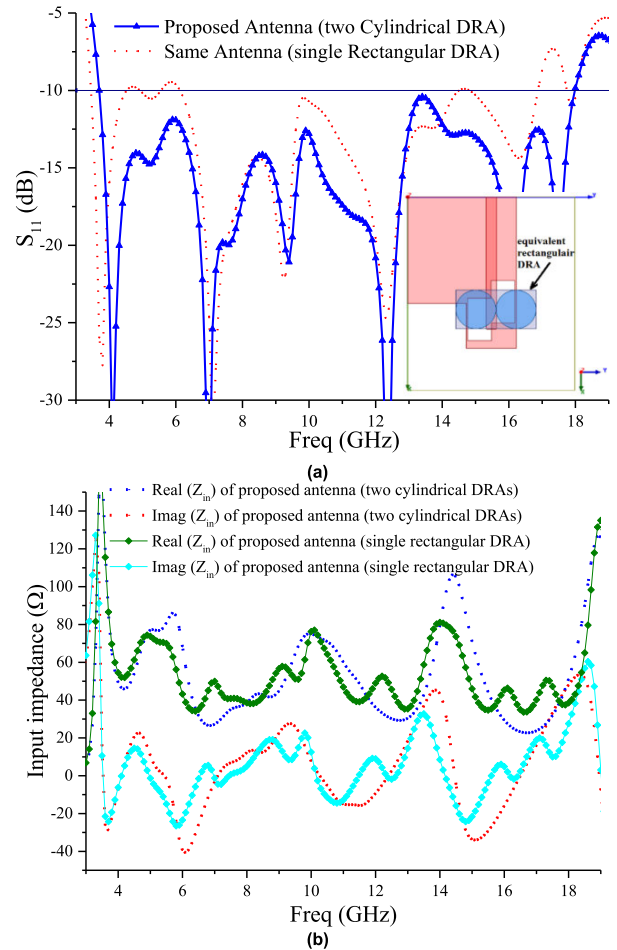


**FIGURE 5.** (a) Simulated  $S_{11}$  of 2-cylindrical DRA compared to a single rectangular DRA with the same overall dimensions, (b) Simulated input impedance of 2-cylindrical DRA compared to a single rectangular DRA.

The measurement of the proposed antenna with and without DRs results are also compared and are in good agreement with the simulation ones.


Fig. 4(b) shows good agreement between measurements and simulations of the antenna without DR. We can notice that this antenna works in the frequency bands 3.9-6GHz and 11.1-12.8GHz only by the application of the DGS and the slot techniques without the introduction of the DR. Figs. 4 (c) and (d) present the prototype of the antenna with DR and the simulated and measured  $S_{11}$  without and with consideration of the glue thickness, respectively. It is remarkable with confirmation that the glue has a considerable effect on  $S_{11}$ , especially at high frequencies. In general, the obtained results are in good agreement.

Figs. 5(a) and (b) show the benefit of the introduction of the cylindrical DR to excite more hybrid modes than with a rectangular DR, as was previously reported in [27].

According to [33], the frequencies of the three lowest modes  $HEM_{01\delta}$ ,  $TE_{01\delta}$  and  $TM_{01\delta}$  of a single cylindrical DRA are 10.484, 12.188 and 18.164 GHz, respectively, while in [43], [53] the resonant frequencies for  $HE_{11\delta}$ ,  $EH_{11\delta}$ ,  $TE_{11\delta}$  and  $TM_{01\delta}$  modes are 9.8469, 10.2358, 12.2768 and

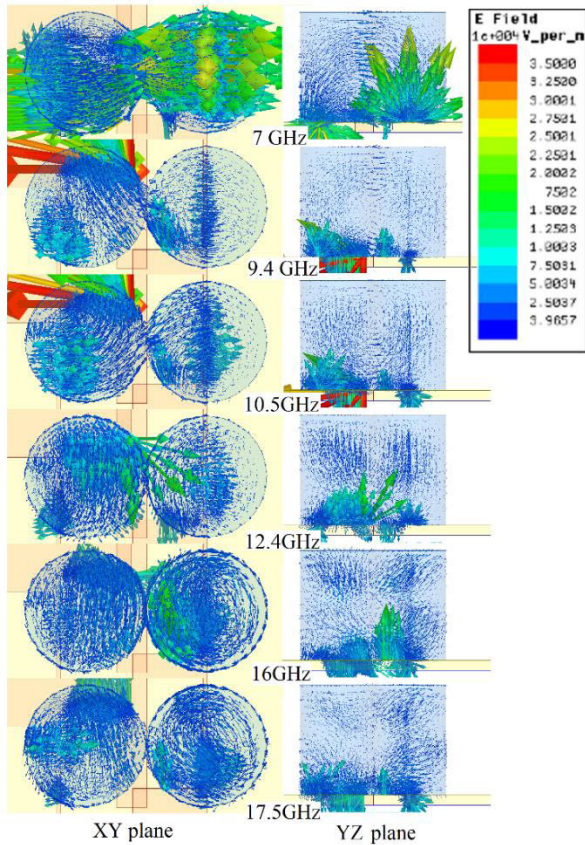


**FIGURE 6.** Magnitude of electric field distribution for 7.0 GHz and (TE<sub>δ11</sub>, quasi-HE<sub>11δ</sub>) 9.4 GHz, 10.5GHz (HEM<sub>01δ</sub>, EH<sub>11δ</sub>, TE<sub>1δ1</sub>, and TE<sub>11δ</sub>) 12.4 GHz (TE<sub>01δ</sub>), 16.0 GHz (TE<sub>102</sub> and TE<sub>δ21</sub>) and 17.5 GHz (TM<sub>01δ</sub>). (xz plane, yz plane).

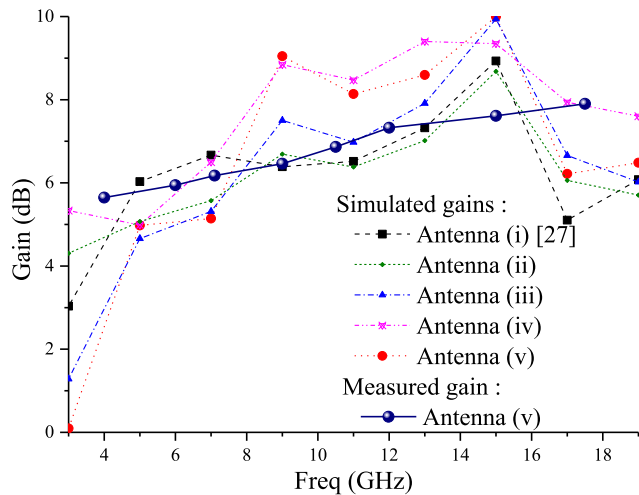


**FIGURE 7.** Measured and simulated gains of the proposed antennas.

18.2089 GHz, respectively. These modes are only excited by a single DRA, so it is possible for other modes to be excited at low frequencies by the two DRAs (the same effect as for the rectangular DRA in [27]).

It should be noted that in this study, the ground plane used is defected while a full sized plane is used in [27].

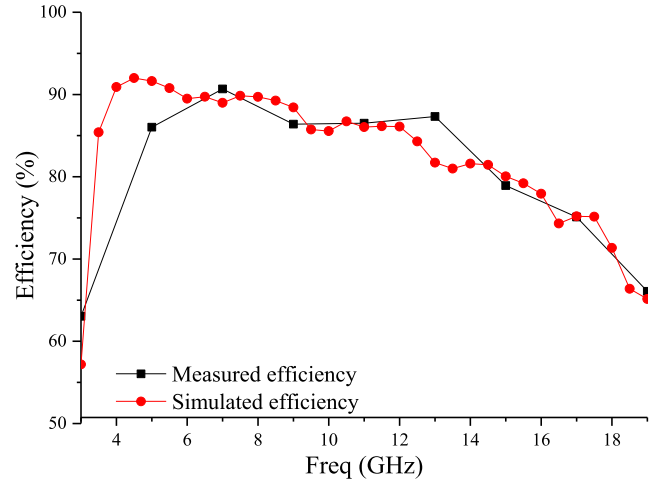

**FIGURE 8.** Measured and simulated efficiency of the proposed antenna.

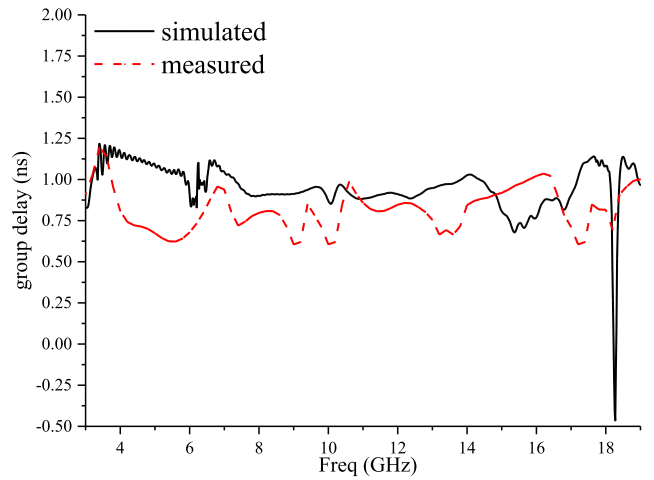

**FIGURE 9.** Simulated and measured group delay of the proposed antenna.

The presented results give an additional proof to the equivalence between the two cylindrical DR's with a single rectangular DR having the same overall dimensions.

For the case of a single rectangular DR, according to [54] and [27], the frequencies of TE<sub>δ11</sub>, TE<sub>1δ1</sub> and TE<sub>11δ</sub> modes are 7.19, 10.23 and 10.51 GHz, respectively. In total, the excited modes are TE<sub>δ11</sub> at 7 GHz, HE<sub>11δ</sub> at 9.85 GHz, and around 10 GHz, we have excited modes (HEM<sub>01δ</sub>, EH<sub>11δ</sub>, TE<sub>1δ1</sub>, and TE<sub>11δ</sub>), as shown in Fig. 6. The TE<sub>102</sub> and TE<sub>δ21</sub> modes are excited at 12.4 and 16 GHz [27], and finally the mode TM<sub>01δ</sub> at 17.5 GHz (Fig. 6).

Figs. 7 and 8 illustrate respectively the measured and simulated gains in the broadside direction and efficiency of the presented antenna. The simulated gain assumes an ideal feeding network, whereas the measurements include the actual feeding network insertion loss, hence there are local discrepancies. The plot shows the calculated gain varying between 4.30 and 9.98 dBi with a maximum of 9.98 dBi at 15GHz, while the measured gain varies between 5.65 and 7.9 dBi in the band from 6 to 17.5GHz, with a maximum

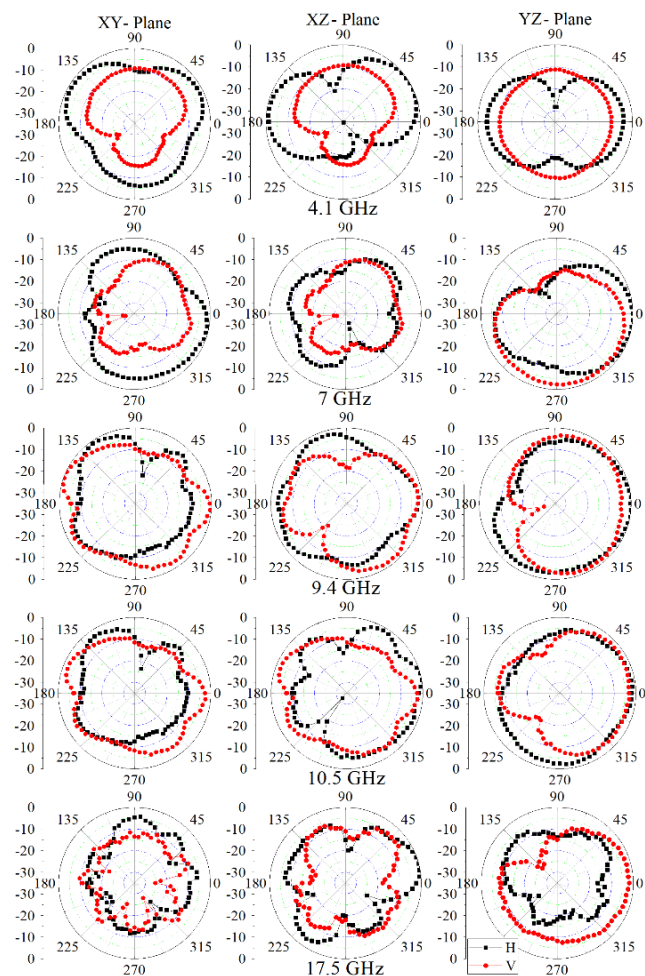


FIGURE 10. Measured radiation patterns of the proposed antenna. Left: xy-plane, middle: xz-plane and right: yz-plane.


of 7.9 dBi at 17.5 GHz. Additionally, the measured radiation efficiencies are over 75 % from 3.6 to 18 GHz.

Form Fig. 9, the antenna provides linear  $S_{21}$  response and non-varying group delay response in the 3.6-18GHz, where maximum and minimum values of simulated group delay are 1.19 and 0.7 ns, respectively, whereas the measured are 1.19 and 0.66 ns, which shows an acceptable performance in time-domain.


Fig. 10 shows radiation patterns measured at frequencies 4.1, 7, 9.4, 10.5 and 17.5 GHz. This shows that the antenna has a wide radiation pattern with a maximum along the normal to the substrate, covering a half-space. In some cases, an almost omnidirectional radiation pattern is observed.

#### IV. EFFECT OF DRS NUMBER

The proposed arrangement of two slots feeding the two DRs gives an extra degree of freedom in the design procedure. The achieved higher bandwidth can be interpreted as the result of merging many resonating frequencies bands of the different parts constituting the antenna. Obviously, adding a second slot has resulted in increased bandwidth.




(a)

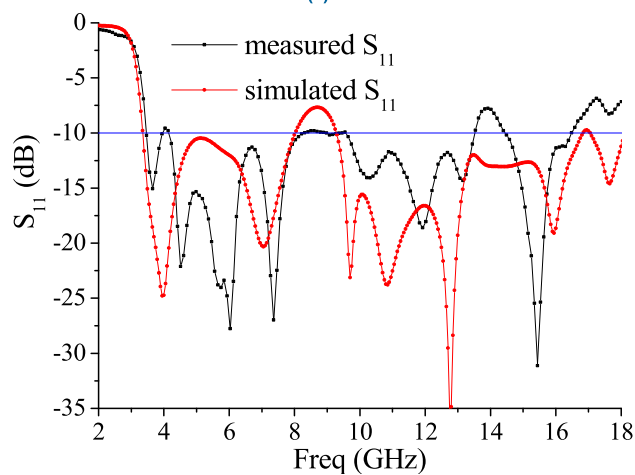


(b)

FIGURE 11. (a) Proposed antenna with three DRs (1<sup>st</sup> configuration). (b) Simulated and measured  $S_{11}$  of 3-DR antenna.



(a)

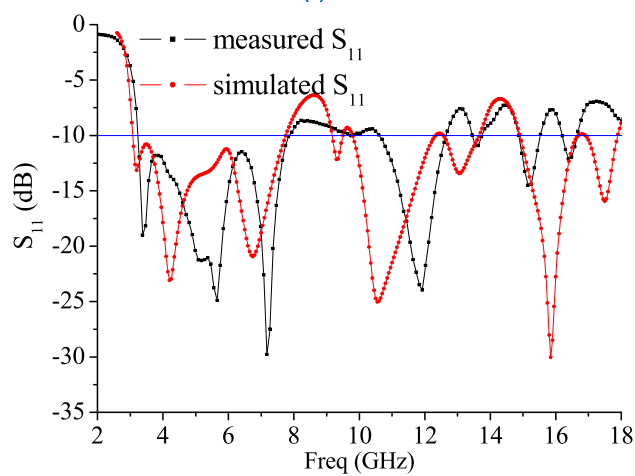


(b)

FIGURE 12. (a) Proposed antenna with three DRs (2<sup>nd</sup> configuration). (b) Simulated and measured  $S_{11}$  of 3-DR antenna.

Wherever each resonant frequency can be attributed to a relevant part of the antenna, the designer will have a wider scope to tailor the required extension of the bandwidth.



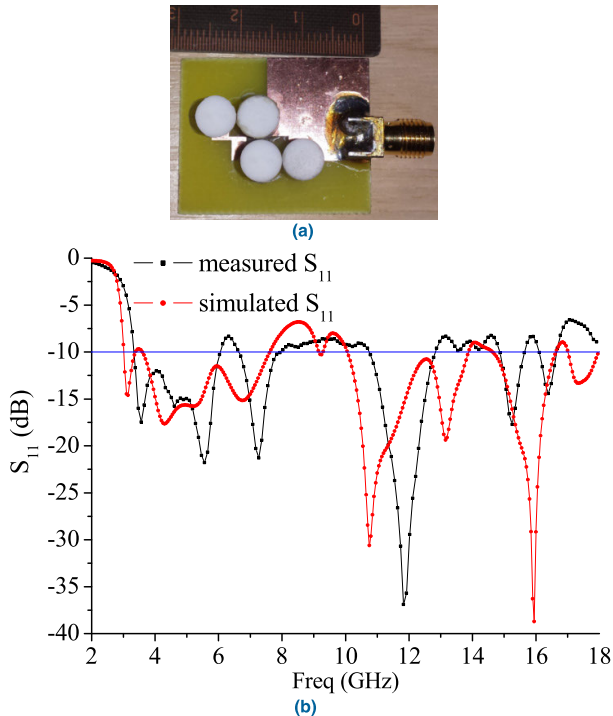

**FIGURE 13.** (a) Proposed antenna with four DRs (3<sup>rd</sup> configuration) (b) Simulated and measured  $S_{11}$  of 4-DR antenna.

While the resonating parts of the antenna: DRs, slots and feed line/stub are the most influential factors on the antenna characteristics, the effect of the DR number with a wide slot on  $S_{11}$  is also investigated.

The DR number effect is very important compared to the slot, as is well illustrated by Figs. 11, 12 and 13.

For the first case (3-DR antenna configuration), we could theoretically have a bandwidth of 3.4-8.05 and 9.25-16.85GHz and experimentally 3.35-13.45 and 14.45-16.5GHz (Fig. 11). In the second configuration, the bandwidth is shifted to 3.05-7.85GHz and 9.15-12.3GHz; a slight variation between the theoretical and the experimental results is observed (Fig. 12).

For the third case (4-DR antenna configuration, Fig.13), the frequency is shifted down to 3GHz; but in this case the antenna bandwidth becomes relatively narrower.

The advantage of having a wide slot is to excite the lower frequencies and this can, with an adequate number of DRs, control the usable frequency band.

## V. CONCLUSION

In this work, a compact dielectric resonator antenna for ultra-wideband applications has been studied. It has been shown that the use of dielectric resonators enhances the antenna performance. The asymmetric placement of the DR pair (three and four), the defected ground technique, the dimensions and the shape of the aperture together give designers more scope for the optimization process. More resonances can be generated and the bandwidth has thereby been improved. The obtained results show that an impedance bandwidth

of 133.33%, covering the UWB 3.6 GHz to 18.0 GHz, and a maximum simulated and measured power gain of 9.9dBi and 7.9 dBi, respectively, have been achieved. The measured results of the prototype gave two bands extending from 3.55 to 13.05 GHz (114.46%) and from 14.3 to 16 GHz (11%).

## REFERENCES

- [1] S. F. Jilani and A. Alomainy, "Millimetre-wave T-shaped MIMO antenna with defected ground structures for 5G cellular networks," *IET Microw., Antennas Propag.*, vol. 12, no. 5, pp. 672–677, Apr. 2018.
- [2] C. Zebiri, D. Sayad, N. T. Ali, M. Lashab, F. Benabdelaziz, R. A. Abd-Alhameed, I. T. E. Elfergani, and J. Rodriguez, "Reduced ground plane aperture-coupled DRA fed by slotted microstrip for ultra-wideband application," in *Proc. 11th Eur. Conf. Antennas Propag. (EuCAP)*, Mar. 2017, pp. 965–969.
- [3] D. Guha, M. Biswas, and Y. M. M. Antar, "Microstrip patch antenna with defected ground structure for cross polarization suppression," *IEEE Antennas Wireless Propag. Lett.*, vol. 4, pp. 455–458, 2005.
- [4] D. Guha, S. Biswas, T. Joseph, and M. T. Sebastian, "Defected ground structure to reduce mutual coupling between cylindrical dielectric resonator antennas," *Electron. Lett.*, vol. 44, pp. 836–837, Jul. 2008.
- [5] A. K. Gautam, A. Bisht, and B. K. Kanaujia, "A wideband antenna with defected ground plane for WLAN/WiMAX applications," *AEU-Int. J. Electron. Commun.*, vol. 70, no. 3, pp. 354–358, 2016.
- [6] A. Boutejdar and W. A. Ellatif, "A novel compact UWB monopole antenna with enhanced bandwidth using triangular defected microstrip structure and stepped cut technique," *Microw. Opt. Technol. Lett.*, vol. 58, no. 6, pp. 1514–1519, 2016.
- [7] W.-C. Liu, C.-M. Wu, and Y. Dai, "Design of triple-frequency microstrip-fed monopole antenna using defected ground structure," *IEEE Trans Antennas Propag.*, vol. 59, no. 7, pp. 2457–2463, Jul. 2011.
- [8] W. Hu, Y.-Z. Yin, P. Fei, and X. Yang, "Compact triband square-slot antenna with symmetrical L-strips for WLAN/WiMAX applications," *IEEE Antennas Wireless Propag. Lett.*, vol. 10, pp. 462–465, 2010.
- [9] M. K. Khandelwal, B. K. Kanaujia, and S. Kumar, "Defected ground structure: Fundamentals, analysis, and applications in modern wireless trends," *Int. J. Antennas Propag.*, vol. 2017, Feb. 2017, Art. no. 2018527.
- [10] N. P. Yadav, "Triple U-slot loaded defected ground plane antenna for multi-band operations," *Microw. Opt. Technol. Lett.*, vol. 58, no. 1, pp. 124–128, 2016.
- [11] V. Tiwari, K. Vyas, and N. Goyal, "Gain enhancement of a CPW—Fed horse shoe shaped slot antenna with defected ground structures for WiMax/WLAN applications," in *Proc. Int. Conf. Recent Adv. Innov. Eng. (ICRAIE)*, May 2014, pp. 1–5.
- [12] A. Singh and S. Singh, "A novel CPW-fed wideband printed monopole antenna with DGS," *AEU-Int. J. Electron. Commun.*, vol. 69, no. 1, 2015, pp. 299–306.
- [13] C. Zhang, J. Zhang, and L. Li, "Triple band-notched UWB antenna based on SIR-DGS and fork-shaped stubs," *Electron. Lett.*, vol. 50, no. 2, pp. 67–69, Jan. 2014.
- [14] D. H. Bi, Z. Y. Yu, S. G. Mo, and X. C. Yin, "Two new ultra-wideband antennas with 3.4/5.5 GHz dual band-notched characteristics," *Microw. Opt. Tech. Lett.*, vol. 51, pp. 2942–2945, 2009.
- [15] A. Nouri and G. R. Dadashzadeh, "A compact UWB band-notched printed monopole antenna with defected ground structure," *IEEE Antennas Wireless Propag. Lett.*, vol. 10, pp. 1178–1181, 2011.
- [16] K. H. Chiang and K. W. Tam, "Microstrip monopole antenna with enhanced bandwidth using defected ground structure," *IEEE Antennas Wireless Propag. Lett.*, vol. 7, pp. 532–535, 2008.
- [17] C. Zebiri, M. Lashab, D. Sayad, I. T. E. Elfergani, A. Ali, M. Al Khambashi, J. Rodriguez, F. Benabdelaziz, and R. A. Abd-Alhameed, "Bandwidth Enhancement of rectangular dielectric resonator antenna using circular and sector slot coupled technique," in *Proc. 12th Eur. Conf. Antennas Propag. (EuCAP)*, Apr. 2018, pp. 1–4.
- [18] C. Ozzaim, F. Ustuner, and N. Tarim, "Stacked conical ring dielectric resonator antenna excited by a monopole for improved ultrawide bandwidth," *IEEE Trans. Antennas Propag.*, vol. 61, no. 3, pp. 1435–1438, Mar. 2013.
- [19] R. D. Gupta and M. S. Parihar, "Investigation of an asymmetrical E-shaped dielectric resonator antenna with wideband characteristics," *IET Microw., Antennas Propag.*, vol. 10, no. 12, pp. 1292–1297, 2016.

- [20] L. Lu, Y. C. Jiao, H. Zhang, R. Wang, and T. Li, "Wideband circularly polarized antenna with stair-shaped dielectric resonator and open-ended slot ground," *IEEE Antennas Wireless Propag. Lett.*, vol. 15, pp. 1755–1758, 2016.
- [21] P. Suwanta, P. Krachodno, and R. Wongson, "Wideband inverted L-shaped dielectric resonator antenna for medical applications," in *Proc. IEEE Int. Conf. Comput. Electromagn. (ICCEM)*, Mar. 2017, pp. 188–189.
- [22] R. Chakraborty, M. Pal, and R. Ghatak, "An X-band dielectric resonator antenna using a single elliptical shaped dielectric resonator," *AEU-Int. J. Electron. Commun.*, vol. 83, pp. 348–352, Jan. 2018.
- [23] Y. Gao, Z. Feng, and L. Zhang, "Compact asymmetrical T-shaped dielectric resonator antenna for broadband applications," *IEEE Trans. Antennas Propag.*, vol. 60, no. 3, pp. 1611–1615, Mar. 2012.
- [24] A. A. Kishk, "Wideband dielectric resonator antenna in a truncated tetrahedron form excited by a coaxial probe," *IEEE Trans. Antennas Propag.*, vol. 51, no. 10, pp. 2907–2912, Oct. 2003.
- [25] K. Trivedi and D. A. Pujara, "Design and development of a wide-band fractal tetrahedron dielectric resonator antenna with triangular slots," *Prog. Electromagn. Res. M*, vol. 60, pp. 47–55, 2017, doi: 10.2528/PIERM17061103.
- [26] A. H. Majeed, A. S. Abdullah, F. Elmegri, K. H. Sayidmarie, R. A. Abd-Alhameed, and J. M. Noras, "Aperture-coupled asymmetric dielectric resonators antenna for wideband applications," *IEEE Antennas Wireless Propag. Lett.*, vol. 13, pp. 927–930, 2014.
- [27] C.-E. Zebiri, M. Lashab, D. Sayad, I. T. E. Elfergani, K. H. Sayidmarie, F. Benabdellaziz, R. A. Abd-Alhameed, J. Rodriguez, and J. M. Noras, "Offset aperture-coupled double-cylinder dielectric resonator antenna with extended wideband," *IEEE Trans. Antennas Propag.*, vol. 65, no. 10, pp. 5617–5622, Oct. 2017.
- [28] N. Yang, K. W. Leung, and N. Wu, "Pattern-diversity cylindrical dielectric resonator antenna using fundamental modes of different mode families," *IEEE Trans. Antennas Propag.*, to be published.
- [29] D. Guha, B. Gupta, and Y. M. M. Antar, "Hybrid monopole-DRAs using hemispherical/conical-shaped dielectric ring resonators: Improved ultrawideband designs," *IEEE Trans. Antennas Propag.*, vol. 60, no. 1, pp. 393–398, Jan. 2012.
- [30] C. Zebiri, F. Benabdellaziz, M. Lashab, D. Sayad, F. Elmegri, I. T. E. Elfergani, N. T. Ali, A. S. Hussaini, R. A. Abd-Alhameed, and J. Rodriguez, "Aperture-coupled asymmetric dielectric resonator antenna with slotted microstrip line for enhanced ultrawideband," in *Proc. 10th Eur. Conf. Antennas Propag. (EuCAP)*, Apr. 2016, pp. 1–3.
- [31] I. Elfergani, A. S. Hussaini, J. Rodriguez, and R. Abd-Alhameed, Eds., *Antenna Fundamentals for Legacy Mobile Applications and Beyond*, 1st ed. Cham, Switzerland: Springer, 2018, doi: 10.1007/978-3-319-63967-3.
- [32] G. Almpanis, C. Fumeaux, and R. Vahldieck, "Offset cross-slot-coupled dielectric resonator antenna for circular polarization," *IEEE Microw. Wireless Compon. Lett.*, vol. 16, no. 8, pp. 461–463, Aug. 2006.
- [33] K. M. Luk and K. W. Leung, *Dielectric Resonator Antennas*. Hertfordshire, U.K.: Research Studies Press, 2002.
- [34] A. A. Kishk, A. W. Glisson, and D. Kajfez, "Effect of an air gap around the coaxial probe exciting a cylindrical dielectric resonator antenna," *Electron. Lett.*, vol. 30, no. 3, pp. 177–178, Feb. 1994.
- [35] K. K. Chow, "On the solution and field pattern of cylindrical dielectric resonators," *IEEE Trans. Microw. Theory Techn.*, vol. MTT-14, no. 9, p. 439, Sep. 1966.
- [36] Y. Chen and C.-F. Wang, *Characteristic Modes: Theory and Applications in Antenna Engineering*. Hoboken, NJ, USA: Wiley, 2015.
- [37] A. A. Kishk, M. R. Zunoubi, and D. Kajfez, "A numerical study of a dielectric disk antenna above grounded dielectric substrate," *IEEE Trans. Antennas Propag.*, vol. 41, no. 6, pp. 813–821, Jun. 1993.
- [38] M. Chauhan, A. K. Pandey, and B. Mukherjee, "A novel compact cylindrical dielectric resonator antenna for wireless sensor network application," *IEEE Sensors Lett.*, vol. 2, no. 2, Jun. 2018, Art. no. 3501004.
- [39] A. Iqbal, A. Smida, O. A. Saraereh, Q. H. Alsafasfeh, N. K. Mallat, and B. M. Lee, "Cylindrical dielectric resonator antenna-based sensors for liquid chemical detection," *Sensors*, vol. 19, no. 5, p. 1200, 2019.
- [40] B.-J. Liu, J.-H. Qiu, C.-H. Wang, W. Li, and G.-Q. Li, "Polarization-reconfigurable cylindrical dielectric resonator antenna excited by dual probe with tunable feed network," *IEEE Access*, vol. 7, pp. 60111–60119, 2019.
- [41] G. P. Junker, A. A. Kishk, and A. W. Glisson, "Input impedance of aperture-coupled dielectric resonator antennas," *IEEE Trans. Antennas Propag.*, vol. 44, no. 5, p. 600, May 1996.
- [42] A. A. Kishk, A. W. Glisson, and G. P. Junker, "Bandwidth enhancement for split cylindrical dielectric resonator antennas," *Prog. Electromagn. Res.*, vol. 33, pp. 97–118, 2001.
- [43] R. K. Mongia and P. Bhartia, "Dielectric resonator antennas—A review and general design relations for resonant frequency and bandwidth," *Int. J. Microw. Millim.-Wave Comput. Aided Eng.*, vol. 4, no. 3, pp. 230–247, Jul. 1994.
- [44] Y. Wang, S. Liu, T. A. Denidni, Q. Zeng, and G. Wei, "Integrated ultra-wideband planar monopole with cylindrical dielectric resonator antennas," *Prog. Electromagn. Res. C*, vol. 44, pp. 41–53, 2013.
- [45] R. K. Mongia, "Theoretical and experimental resonant frequencies of rectangular dielectric resonators," *IEEE Proc. H-Microw., Antennas Propag.*, vol. 139, no. 1, pp. 98–104, Feb. 1992.
- [46] R. K. Mongia, A. Ittipiboon, and M. Cuhaci, "Measurement of radiation efficiency of dielectric resonator antennas," *IEEE Microw. Guided Wave Lett.*, vol. 4, no. 3, pp. 80–82, Mar. 1994.
- [47] J. Van Bladel, "On the resonances of a dielectric resonator of very high permittivity," *IEEE Trans. Microw. Theory Techn.*, vol. MTT-23, no. 2, pp. 199–208, Feb. 1975.
- [48] A. A. Kishk, B. Ahn, and D. Kajfez, "Broadband stacked dielectric resonator antennas," *Electron. Lett.*, vol. 25, no. 18, pp. 1232–1233, Aug. 1989.
- [49] S. M. Shum and K. M. Luk, "Stacked annular ring dielectric resonator antenna excited by axis-symmetric coaxial probe," *IEEE Trans. Antennas Propag.*, vol. 43, no. 8, pp. 889–892, Aug. 1995.
- [50] K. W. Leung, K. M. Luk, K. Y. Chow, and E. K. N. Yung, "Bandwidth enhancement of dielectric resonator antenna by loading a low-profile dielectric disk of very high permittivity," *Electron. Lett.*, vol. 33, no. 9, pp. 725–726, Apr. 1997.
- [51] A. Sangiovanni, J. Y. Dauvignac, and C. Pichot, "Stacked dielectric resonator antenna for multifrequency operation," *Microw. Opt. Technol. Lett.*, vol. 18, no. 4, pp. 303–306, Jul. 1998.
- [52] A. A. Kishk, X. Zhang, A. W. Glisson, and D. Kajfez, "Numerical analysis of stacked dielectric resonator antennas excited by a coaxial probe for wideband applications," *IEEE Trans. Antennas Propag.*, vol. 51, no. 8, pp. 1996–2006, Aug. 2003.
- [53] A. A. Kishk, A. W. Glisson, and G. P. Junker, "Study of broadband dielectric resonator antennas," in *Proc. Antenna Appl. Symp.*, Monticello, VA, USA, Sep. 1999, pp. 45–68.
- [54] R. K. Mongia and A. Ittipiboon, "Theoretical and experimental investigations on rectangular dielectric resonator antennas," *IEEE Antennas Propag.*, vol. 45, no. 9, pp. 1348–1356, Sep. 1997.



**CHEMSEDDINE ZEBIRI** received the Ph.D. degree in electronics from the University of Constantine, Algeria, in 2011. He has been with the Department of Electronics, University of Ferhat Abbas, Setif, Algeria, since 2006, where he is currently an Associate Professor. He started working on reflector and microstrip antennas using moment method in time and spectral domains. He has published up to 90 journal and refereed conference articles. He is the author of four book chapters.

His current research interests include dielectric resonator antennas, MIMO antennas, mmWave antennas, magnetic materials, and complex material components in microwave and optical domains.



**DJAMEL SAYAD** received the Ph.D. degree in electronics from the University of Skikda, Algeria, in 2017. He is currently an Assistant Lecturer with the Department of Electrical Engineering, University of Skikda. He has several journals and conference articles publications covering a wide area in the design of antennas using metamaterial and dielectric antennas. His current research interests include electromagnetics and complex media, and microwave propagation and antennas.



**ISSA T. E. ELFERGANI** received the M.Sc. and Ph.D. degrees in electrical and electronic engineering from the University of Bradford, U.K., in 2008 and 2012, respectively, with a specialization in tunable antenna design for mobile handset and UWB applications. He is currently a Senior Researcher with the Instituto de Telecomunicações, Campus Universitário de Santiago, Aveiro, Portugal, working in several national and international research funded projects, such as

ENIAC ARTEMIS, from 2011 to 2014, the EUREKA BENEFIC, from 2014 to 2017, CORTIF, from 2014 to 2017, GREEN-T, from 2011 to 2014, VALUE, from 2016 to 2016, and H2020-SECRET Innovative Training Network, from 2017 to 2020. He has successfully completed the supervision of several master's and Ph.D. degree students. He has around 100 high-impact publications in academic journals and international conferences. In addition, he is the author of two book editorial and nine book chapters. He has been on the technical program committee of a large number of IEEE conferences. He has several years of experience in 3G/4G and 5G radio frequency systems research with particular expertise on several and different antenna structures along with novel approaches in accomplishing a size reduction, low cost, improved bandwidth, and gain and efficiency. His expertise include research in various antenna designs, such as MIMO, UWB, balanced and unbalanced mobile phone antennas, RF tunable filter technologies, and power amplifier designs. In 2014, he received prestigious FCT fellowship for the Postdoctoral research. He is also a member of the American Association for Science and Technology (AASCIT). He was the Chair of both Fourth and Fifth International Workshop on Energy Efficient and Reconfigurable Transceivers (EERT). He is also a Guest Editor of Hindawi special issue antenna design techniques for 5g mobile communications and electronics and the special issue recent technical developments in energy-efficient 5g mobile cells. He reviewed several good ranked journals, such as the IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS, the IEEE TRANSACTIONS ON VEHICULAR TECHNOLOGY, *IET Microwaves, Antennas and Propagation*, IEEE ACCESS, *Transactions on Emerging Telecommunications Technologies*, *Radio Engineering* journal, *IET-SMT*, and the *IET Journal of Engineering*.



**JAMAL SULIEMAN KOSHA** was born in Tripoli, Libya. He received the B.Sc. degree in electronics and computer engineering from Tripoli University, Tripoli, in 1994, the M.Sc. degree in communication and computer engineering from University Kebangsaan Malaysia, in 2004, and the M.Sc. degree in human resources management from the University of Salford, in 2017. He is currently pursuing the Ph.D. degree in wireless and mobile communications systems with the Faculty of Engineering and Informatics, University of Bradford. He was a Lecturer Assistant for one year with Tripoli University. He was the Head of the Statistics & Information Office, Almadar Telecom Company, for two years. He was appointed as a Lecturer, the Head of IT Department, and the Deputy Director of the Yafren Higher Institute, from 2004 to 2009. He was an Active Member of the National Digital Trunking Network Team, Libya, from 2005 to 2007. He was appointed as the Head of Corporate Development Office, Almadar Aljadid Telecom Company, from 2012 to 2015. He was able to publish and contribute over 15 journal and conference articles in field wireless and mobile communications.



**WIDAD FARAJ A. MSHWAT** was born in Tripoli, Libya. She received the B.Sc. degree in electrical and electronic engineering from Tripoli University, Tripoli, in 1996, and the M.Sc. degree in communication and computer engineering from University Kebangsaan Malaysia, in 2004. She is currently pursuing the Ph.D. degree in the wireless and mobile communications systems with the Faculty of Engineering and Informatics, University of Bradford. She was a Lecturer Assistant for one year with Tripoli University. She was the Head of the Training Section, Almadar Telecom Company, for two years. She was appointed as a Lecturer, the Head of the Communications Engineering Department, Yafren Higher Institute, from 2004 to 2009. She was the Head of the Communications Department, The Higher Institute for Girls/Tripoli, from 2012 to 2015. She has published and contributed to more than 20 journal and conference articles in the fields of wireless and mobile communications.

She was the Head of the Training Section, Almadar Telecom Company, for two years. She was appointed as a Lecturer, the Head of the Communications Engineering Department, Yafren Higher Institute, from 2004 to 2009. She was the Head of the Communications Department, The Higher Institute for Girls/Tripoli, from 2012 to 2015. She has published and contributed to more than 20 journal and conference articles in the fields of wireless and mobile communications.



**CHAN HWANG SEE (M'14–SM'15)** received the B.Eng. degree (Hons.) in electronic, telecommunication, and computer engineering and the Ph.D. degree in computational bioelectromagnetics from the University of Bradford, Bradford, U.K. He is an Associate Professor with the School of Engineering and the Built Environment, Edinburgh Napier University. He is also a Visiting Research Fellow with the School of Engineering and Informatics, University of Bradford, and the School of Engineering, University of Bolton. Previously, he was a Senior Lecturer with the University of Bolton and a Senior Research Fellow with the Antennas and Applied Electromagnetics Research Group, University of Bradford. He has published more than 200 peer-reviewed journal articles and conference articles. He is the coauthor of one book and five book chapters. His research interests include wireless sensor network system design, computational electromagnetism, antennas, microwave circuits, and acoustic sensor design. He is a Chartered Engineer in the U.K., and a Fellow of the Institution of Engineering and Technology, U.K. He is also a Fellow of the Higher Education Academy. He is an Associate Editor of IEEE ACCESS. He received two Young Scientist Awards from the International Union of Radio Science and the Asia-Pacific Radio Science Conference, in 2008 and 2010. He received the Certificate of Excellence for his successful Knowledge Transfer Partnership with Yorkshire Water on the design and implementation of a wireless sensor system for sewerage infrastructure monitoring, in 2009.

He is the coauthor of one book and five book chapters. His research interests include wireless sensor network system design, computational electromagnetism, antennas, microwave circuits, and acoustic sensor design. He is a Chartered Engineer in the U.K., and a Fellow of the Institution of Engineering and Technology, U.K. He is also a Fellow of the Higher Education Academy. He is an Associate Editor of IEEE ACCESS. He received two Young Scientist Awards from the International Union of Radio Science and the Asia-Pacific Radio Science Conference, in 2008 and 2010. He received the Certificate of Excellence for his successful Knowledge Transfer Partnership with Yorkshire Water on the design and implementation of a wireless sensor system for sewerage infrastructure monitoring, in 2009.



**MOHAMED LASHAB** received the D.E.S. degree (higher degree of education in electronics) from Constantine University, Algeria, in 1988, the M.Phil. degree from Trent Polytechnic, Nottingham, England, in 1990, and the Ph.D. degree, in 2009. He joined Skikda University, Algeria, as a Senior Lecturer, in 1995, where he was teaching electrical circuit and electromagnetic principles. He started working on reflector antennas using moment method improved by wavelets, in 2004.

He is a Lecturer with Larbi Ben M'hidi University, Oum El Bouaghi, where he belongs to the group of research with the New Technology in Electronics Laboratory. His main research interests include horn antennas and planar antennas, and the use of artificial materials such as metamaterials and chiral to improve antennas performance.



**JONATHAN RODRIGUEZ** received the master's degree in electronic and electrical engineering and the Ph.D. degree from the University of Surrey, U.K., in 1998 and 2004, respectively. In 2005, he became a Researcher with the Instituto de Telecomunicações, Campus Universitário de Santiago, Portugal, where he was a member of the Wireless Communications Scientific Area. In 2008, he became a Senior Researcher and established the 4TELL Research Group targeting next-generation mobile systems. He has served as a Project Coordinator for major international research projects, including Eureka LOOP and FP7 C2POWER whilst serving as the Technical Manager of FP7 COGEU and FP7 SALUS. He is currently the Coordinator of the H2020-SECRET Innovative Training Network. Since 2009, he has been served as an Invited Assistant Professor with the University of Aveiro, Portugal, and attained associate level, in 2015. In 2017, he was an Appointed Professor of mobile communications with the University of South Wales, U.K.. He is the author of more than 400 scientific works, including ten book editorials. His professional affiliations include a chartered engineer (C.Eng.) (since 2013) and a Fellow of the IET, in 2015.



**KHALIL H. SAYIDMARIE** (M'78) received the B.Sc. degree in electronic and communication engineering from Mosul University, Iraq, in 1976, and the Ph.D. degree from Sheffield University, U.K., in 1981. Then, he joined the College of Engineering, Mosul University, in 1983, where he was promoted to a Full Professor, in 1992. He was the Head of the Electrical Engineering Department, University of Mosul, for nine years. He was also the Manager of the Engineering Consulting Bureau, University of Mosul, for five years. He was the Acting Dean of the College of Electronic Engineering, Mosul University, from 2002 to 2003. He was a Professor of communication engineering with the College of Engineering, University of Amman, Jordan, from October 2006 to September 2009, where he was the Dean of the Faculty of Engineering for the academic year 2008 to 2009. He has been a Professor of communication engineering with the College of Electronic Engineering, Ninevah University, since 2002. He was recipient of a six-month research scholarship from the Australian Endeavour, in 2007, and a four-month endeavour executive fellowship, in 2018, both spent at the ITEE, University of Queensland, Australia. He was a Visiting Professor with Bradford University for one month, in 2013. His research interests include antennas, propagation, and microwaves, where he has published more than 120 articles in refereed journals and conferences. He has supervised 38 Ph.D. and M.Sc. theses.



**HUTHAIFA A. OBEIDAT** received the Ph.D. degree in electrical engineering and the M.Sc. degree in personal mobile and satellite communication from the University of Bradford, U.K., in 2013 and 2018, respectively. He was a Lecturer with the Communication and Electronics Department, Jerash University, Jordan. He has been a member of the Jordanian Engineering Association, since 2011. His research interests include radiowave propagation, millimeter wave propagation, e-health applications, and antenna and location-based services.



**RAED A. ABD-ALHAMEED** (M'02–SM'13) received the B.Sc. and M.Sc. degrees from Basrah University, Basrah, Iraq, in 1982 and 1985, respectively, and the Ph.D. degree from the University of Bradford, West Yorkshire, U.K., in 1997. He is a Professor in electromagnetic and radio frequency engineering with the University of Bradford, U.K. He has long years' research experience in the areas of radio frequency, signal processing, propagations, and antennas and electromagnetic computational techniques. He has published over 600 academic journal and conference articles. In addition, he is the coauthor of four books and several book chapters. At present, he is the Leader of radio frequency, propagation, sensor design and signal processing. In addition to leading the Communications Research Group for years with the School of Engineering and Informatics, Bradford University, U.K. He is a Principal Investigator of several funded applications to EPSRCs and a Leader of several successful Knowledge Transfer Programmes such as Arris (previously known as Pace plc.), Yorkshire Water plc., Harvard Engineering plc., IETG Ltd., Seven Technologies Group, Emkay Ltd., and Two World Ltd., including many research development projects awards supported by regional European funds. He has also been a Co-Investigator of several funded research projects including the H2020 MARIE Skłodowska-CURIE ACTIONS: Innovative Training Networks (ITN) Secure Network Coding for Next Generation Mobile Small Cells 5G-U.S., the Nonlinear and demodulation mechanisms in biological tissue (Department of Health, Mobile Telecommunications, and Health Research Programme), and the Assessment of the Potential Direct Effects of Cellular Phones on the Nervous System (EU: collaboration with 6 other major research organizations across Europe). He was awarded the Business Innovation Award for his successful KTP with Pace and Datong companies on the design and implementation of MIMO sensor systems and antenna array design for service localizations. He has been a Research Visitor with Wrexham University, Wales, since September 2009, covering the wireless and communications research areas. His interests include 5G green communications systems, computational methods and optimizations, wireless and mobile communications, sensor design, EMC, MIMO systems, beam steering antennas, energy efficient PAs, and RF predistorter design applications. He is the chair of several successful workshops on energy efficient and reconfigurable transceivers (EERT): Approach toward energy conservation and Co<sub>2</sub> reduction that addresses the biggest challenges for future wireless systems. He has also appointed as a Guest Editor for the *IET Science, Measurements and Technology* journal, in 2009 and 2012 and currently one of the Editorial Board of Electronic Journal. He is the Fellow of the Institution of Engineering and Technology and the Higher Education Academy, and a Chartered Engineer.

• • •