

Received February 9, 2020, accepted February 21, 2020, date of publication February 27, 2020, date of current version March 6, 2020.

Digital Object Identifier 10.1109/ACCESS.2020.2976751

# Pair-Wise Matching of EEG Signals for Epileptic Identification via Convolutional Neural Network

JIAN LIAN<sup>1,2</sup>, YAN ZHANG<sup>3</sup>, RONG LUO<sup>4</sup>, GUOYONG HAN<sup>5</sup>, WEIKUAN JIA<sup>1</sup>, AND CHENGJIANG LI<sup>2</sup>

<sup>1</sup>Key Laboratory of Intelligent Computing and Information Security in Universities of Shandong, Shandong Provincial Key Laboratory for Distributed Computer Software Novel Technology, Key Laboratory of Intelligent Information Processing, School of Information Science and Engineering, Institute of Life Sciences, Shandong Normal University, Jinan 250358, China

<sup>2</sup>Department of Electrical Engineering and Information Technology, Shandong University of Science and Technology, Jinan 250031, China

<sup>3</sup>College of Industry and Commerce, Shandong Management University, Jinan 250357, China

<sup>4</sup>School of Light Industry Science and Engineering, Qilu University of Technology (Shandong Academy of Science), Jinan 250353, China

<sup>5</sup>School of Management Engineering, Shandong Jianzhu University, Jinan 250101, China

Corresponding author: Guoyong Han (hgy\_126@126.com)

This work was supported in part by the Focus on Research and Development Plan in Shandong Province under Grant 2019GNC106115, in part by the National Nature Science Foundation of China under Grant 21978139, Grant 61572300, and Grant 81871508, and in part by the Taishan Scholar Program of Shandong Province of China under Grant TSHW201502038.

**ABSTRACT** Electroencephalogram (EEG) have been extensively analyzed to identify the characteristics of epileptic seizures in the literature. However, most of these studies focus on the properties of single channel EEG data while neglecting the association between signals from diverse channels. To bridge this gap, we propose an EEG instance matching-based epilepsy classification approach by introducing one convolutional neural network (CNN). First of all, each pair of EEG signals are exploited to form one 2 dimensional matrix, which could be used to reveal the interaction between them. Secondly, the generated matrices are fed into the proposed CNN that would discriminate the input representations. To evaluate the performance of the presented approach, the comparison experiments between the state-of-the-art techniques and our work are conducted on publicly available epilepsy EEG benchmark database. Experimental results indicate that the proposed algorithm could yield the performance with an average accuracy of 99.3%, average sensitivity of 99.5%, and average specificity 99.6%.

**INDEX TERMS** Convolution, machine learning, classification algorithms.

## I. INTRODUCTION


Being a typical brain recording modality, Electroencephalogram (EEG) has been widely applied in the detection and identification of epileptic seizures. Generally, those electric fields from brain are captured by scalp EEG equipment that could provide an economical and non-invasive fashion. Originally, the precise interpretation of EEG data were implemented manually. Since it is a time-consuming and laborious task, the automated classification of EEG samples had become a buzzing field in current studies [1]–[5].

Previously, large amount of researches have paid attention to this domain. For instance, Gotman [6] proposed the first epileptic EEG recognition algorithm, in which the EEG signals were decomposed into elementary waves whose peak amplitude, duration, slope, and sharpness were then simultaneously as the representations for epilepsy in EEG samples. Then, Adeli *et al.* [5], [7], [8] introduced the wavelet (WT) features including discrete Daubechies and harmonic

wavelets to characterize the EEG samples with seizures. Adeli and Ghosh-Dastidar [9] presented an advanced computational model for automatic neurological disorder diagnosis in EEG by using neural networks, wavelets, and chaos theory. In the work of [10], Acharya *et al.* proposed a convolutional neural network (CNN)-centric algorithm for classifying the types of EEG signals. A method using the local binary pattern (LBP) was proposed by Qi *et al.* [12] based on the WT to discriminate the EEG behaviors. Within this framework, the LBP operator was conducted on the WT-based representations and fed into a support vector machine (SVM) classifier. In the work presented in [13], Li *et al.* proposed an automatic EEG signal classification method for epileptic seizure recognition with a continuous WT. Both Gaussian Mixture model (GMM) and Gray Level Co-occurrence Matrix (GLCM) features were employed. Recently, U.R. Rajendra Acharya *et al.* [11] reviewed the automated EEG-based identification of epilepsy including the techniques that are developed for seizure prediction.

Commonly, these automated techniques for epilepsy detection in EEG follow a straightforward procedure including

The associate editor coordinating the review of this manuscript and approving it for publication was Wei Liu.

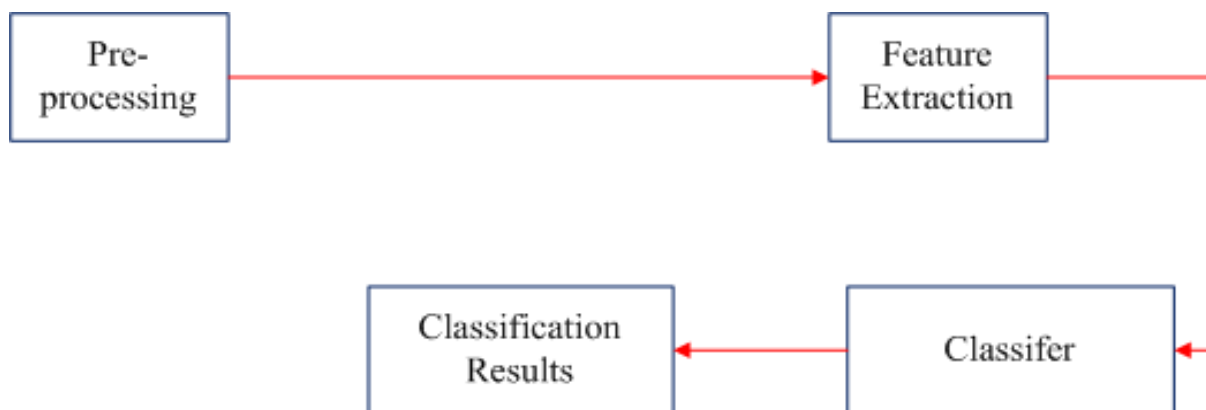

**FIGURE 1.** The pipeline for general anomaly detection algorithms.

pre-processing, feature extraction, feature selection, and classification as illustrated in Fig. 1. These techniques have shown their great performance in various aspects. However, most of them did not take the association between multiple channels of EEG signals as an extracted feature for the discrimination of ictal, interictal, and normal EEG activities. The relationship between multi-path EEG signals could contribute to the identification of epilepsy since the multi-path signals are generated simultaneously. Although multiple channels have been leveraged into these studies, most of them deal with the channels in a serial fashion rather than a parallel pattern. To be specific, the multi-channel EEG signals are incorporated into the classification pipeline one after another.

Meanwhile, since deep learning-based algorithms have become a hot topic in recent applications including image analysis and signal processing [118], [119]. A large amount of them have also been applied in brain-machine interface (BCI) applications. Specially, a number of works have presented the employment of CNNs in EEG information analysis and processing. For instance, Oshea *et al.* [15] proposed an end-to-end deep learning framework that could automatically extract the hierarchical representations from EEG signals for neonatal seizure detection. And the presented CNN was exploited both as a feature extractor and the classifier. In [16], a CNN-based pipeline was proposed to implement the classification of intracranial and scalp EEG data. It could produce the optimal feature sets over the manual descriptors. It is notable that the deep learning-based techniques heavily rely on the quantity and quality of the training set, which is usually inadequate for the publicly available EEG datasets.

Bearing the above-mentioned analysis in mind, we propose a convolutional neural network (CNN)-based pipeline for classifying the types of input EEG signals. In this approach, the relationship between each pair of EEG firstly are integrated into one matrix. By using the 1D convolution operation, the interaction between pair of EEG channels can be generated. Then, the generated matrices are fed into the proposed CNN, which could accurately identify

the type of input data samples. Totally, there are nine categories of combinations for the pairwise EEG activities as followings.

- (1) (normal, normal)
- (2) (normal, ictal)
- (3) (normal, interictal)
- (4) (ictal, normal)
- (5) (ictal, ictal)
- (6) (ictal, interictal)
- (7) (interictal, normal)
- (8) (interictal, ictal)
- (9) (interictal, interictal)


To note that numerous pairs of EEG data are taken as the input for this presented CNN in the following experiments. While in the practical applications, one single channel EEG signal is used as the baseline, which would be combined with each input EEG sample.

To evaluate the performance of the proposed approach, the comparison experiments between the state-of-the-art techniques and our work were carried out on one publicly available dataset. The experimental results indicate that the accuracy of our work is superior over the state-of-the-arts.

In general, our work offers the following contributions:

- (I) To the best of our knowledge, this is an early work of Pairwise matching-based deep learning strategy for epileptic seizure detection in EEG data.
- (II) We propose a novel deep learning architecture with an input of the association between each pair of EEG signals.
- (III) Experimental results indicate that the proposed approach could outperform the state-of-the-arts in accuracy.

The remainder of this article is organized as follows. Firstly, the details about the proposed approach is described in Section II. In Section III, we provide the comparison experiments, results, and the corresponding discussion. Finally, both the conclusion and our future work were given in Section IV.

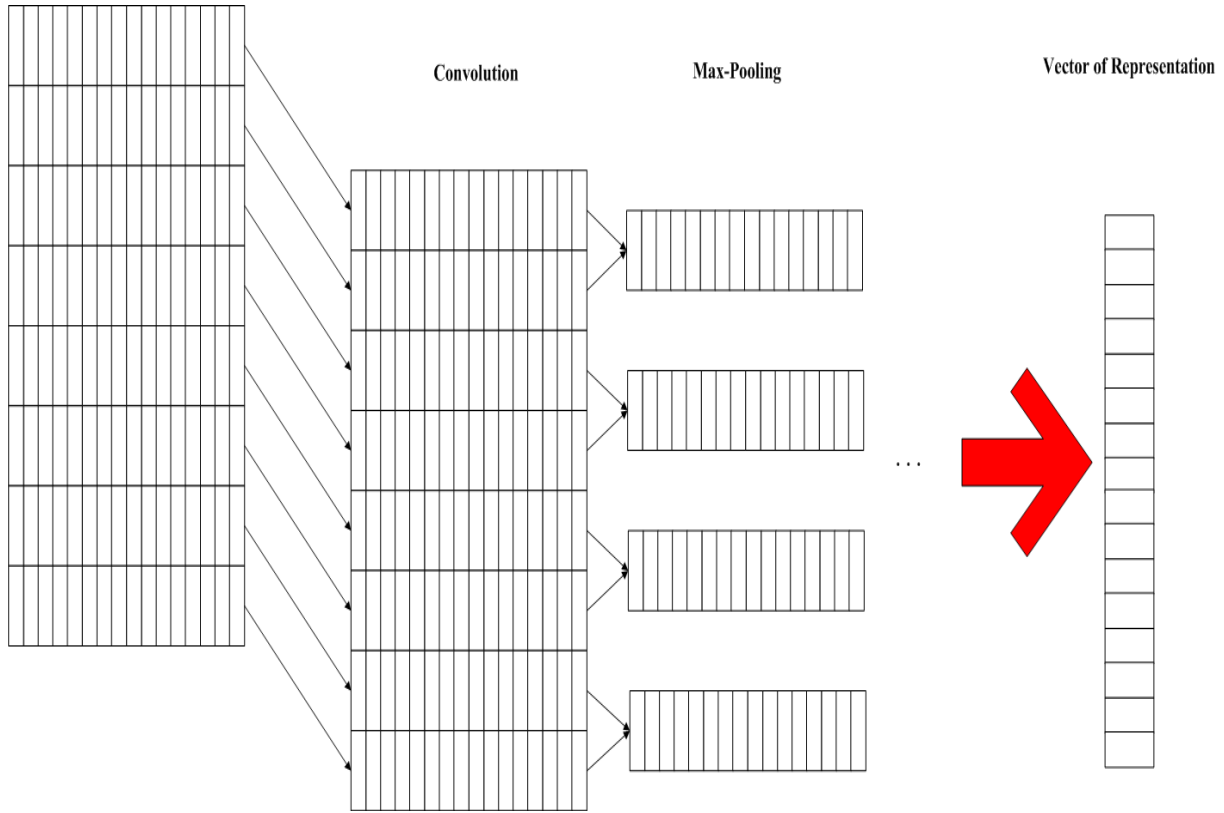

**FIGURE 2.** The proposed convolution operator on EEG signals. Each row represents one epoch of the original EEG sample from each subject while one column stands for the  $\frac{1}{16}$  of an epoch.

**II. METHODOLOGY**

**A. CONVOLUTIONAL EEG SIGNAL MODEL**

Firstly, we propose a novel convolutional framework for modeling the EEG activity. As demonstrated in Fig. 2, the EEG signals aligned sequentially are taken as the input of the proposed convolution operator. Each row in the input data represents one epoch of the original EEG sample from each subject while each column stands for the  $\frac{1}{16}$  of an epoch of EEG signal. Then, the representation vector with a fixed length would be generated by using a sequence of convolutional and pooling layers.

**1) CONVOLUTION**

The employed convolution operators are realized in a sliding window fashion, simultaneously. In general, assuming that an input is  $x$ , the corresponding outcome of class- $c$  at layer- $l$  is formulated as following:

$$z_i^{(l,c)} = z_i^{(l,c)}(x) = \sigma(w^{(l,c)} z_i^{(l-1)} + b^{(l,c)}), \quad c = 1, 2, \dots, C \tag{1}$$

where  $w(\cdot)$  and  $b(\cdot)$  is the weight and bias function, respectively.  $\sigma(\cdot)$  represents the activation function like sigmoid [17] and ReLU [18] while  $C$  denotes the maximal types of the EEG signals. To note that the matrix form of Eq. (1) is:

$$z_i^{(l)} = z_i^{(l)}(x) = \sigma(W^{(l)} z_i^{(l-1)} + b^{(l)}), \tag{2}$$

where  $z_i^{(l,c)}$  denotes the output feature map for type- $c$  at layer- $l$  of location  $i$ ,  $w^{(l,c)}$  is the weighting parameters for class- $c$  at layer- $l$ . And  $z^{(l-1)}$  represents the segment of layer- $l$  at location  $i$  with:

$$\bar{z}_i^{(0)} = x_{i:i+k_1-1} = [x_i^T, x_{i+1}^T, \dots, x_{i+k_1-1}^T]^T \tag{3}$$

where  $k_1$  denotes the width of each row for the input EEG data.

**2) MAX-POOLING**

The max-pooling operator is performed on each pair of rows for the input, which could be mathematically defined as:

$$z_i^{(l,c)} = \max(z_{2i-1}^{(l-1,c)}, z_{2i}^{(l-1,c)}), \quad l = 2, 4, \dots \tag{4}$$

The role of max-pooling in the proposed CNN architecture includes compressing the size of extracted features and removing the redundant components in the data samples.

**B. NETWORK ARCHITECTURE**

The novel CNN architecture is built upon the association between pairwise EEG signals. The EEG behaviors on multiple channels are captured rather than the information from one single channel. Both the characteristics of each single signal and the relationship between two EEG samples could be preserved before feeding into the proposed CNN. To be specific, all of the combinations for the EEG data are

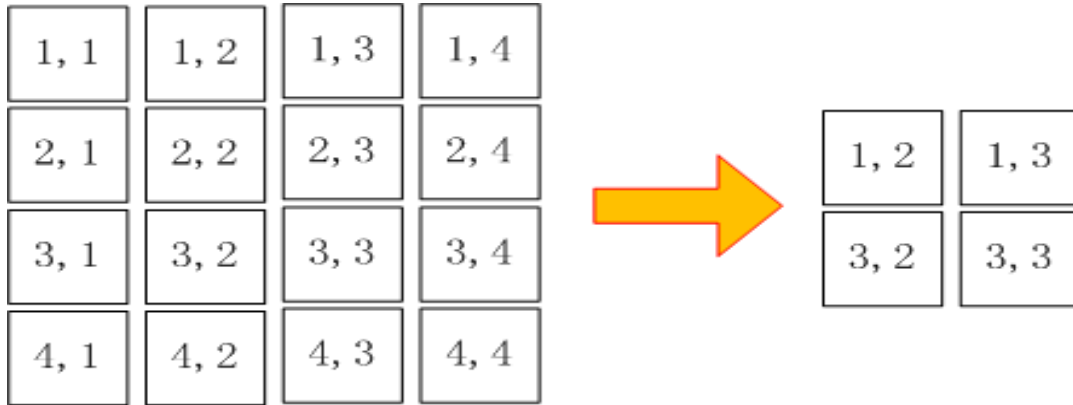


FIGURE 3. The 2D pooling operation that could preserve the spatial position in the proposed CNN.

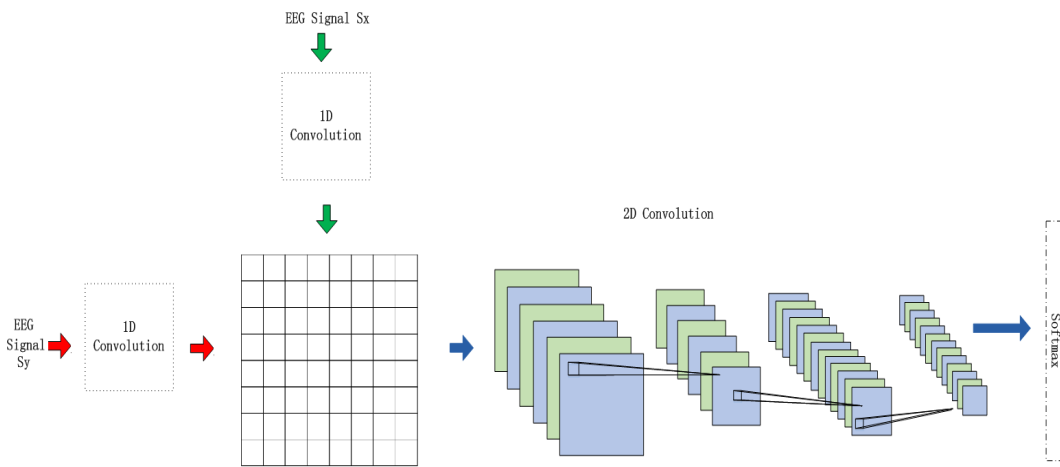


FIGURE 4. The proposed deep learning network architecture.

generated by using the convolution operation presented in Section II-A1. We assume that sample  $x$  and  $y$  are denoted by  $S_x$  and  $S_y$ , for segment  $m$  of  $S_x$  and segment  $n$  in  $S_y$  we obtain:

$$z_{m,n}^{(l,c)} = z_{m,n}^{(l,c)}(x, y) = g(\bar{z}_{m,n}^0) \cdot \sigma(W^{(l,c)} \cdot \bar{z}_{m,n}^0 + b^{(l,c)}), \quad (5)$$

where  $\bar{z}_{m,n}^0 \in \mathbb{R}$  denotes the concatenating vectors of  $S_x$  and  $S_y$ .

$$\bar{z}_{m,n}^0 = [x_{i:i+k_1-1}^T, y_{j:j+k_1-1}^T]^T. \quad (6)$$

From the concatenation, the spatial alignment of the segments are preserved in the first layer. And the following layers both leverage the 2D convolution and pooling operators Fig. 3. In layer-2 and layer-3, the output could be respectively expressed as:

$$z_{m,n}^{(2,c)} = \max(z_{2m-1,2n-1}^{(1,c)}, z_{2m-1,2n}^{(1,c)}, z_{2m,2n-1}^{(1,c)}), \quad (7)$$

and

$$z_{m,n}^{(3,c)} = g(\bar{z}_{m,n}^2) \cdot \sigma(W^{3,c} \cdot \bar{z}_{m,n}^2 + b^{3,c}). \quad (8)$$

Through leveraging the 1D convolution as mentioned Section II-A1, a representation of the interactivity between pairwise EEG signals,  $z_{m,n}^{(l)}$  contains the information from both of them. And the 2D convolution could be formulated as:

$$z_{m,n}^{(l)} = g(\bar{z}_{m,n}^{(l-1)}) \cdot \sigma(W^{(l)} \bar{z}_{m,n}^{(l-1)} + b^{(l,c)}), \quad l = 3, 5, \dots \quad (9)$$

where  $\bar{z}_{m,n}^{(l)}$  connects the representation vectors in layer- $l - 1$ .

In general, the architecture of the proposed CNN is illustrated in Fig. 4.

Besides the 1D convolution layer, there are the following layers described as:

- Convolutional. 48 kernels of size  $3 \times 9 \times 9$  are used in the first layers followed by one ReLU layer.
- Convolutional. 128 kernels of size  $3 \times 7 \times 7$  combined with the ReLU layer
- Convolutional. 128 kernels of size  $3 \times 5 \times 5$  combined with the ReLU layer.
- Fully connected layer. 1024 neurons in total that are used to realize the high-level reasoning.

**TABLE 1.** Performance comparison between state-of-the-art techniques and ours for normal (Set A) and ictal (Set E) EEG signals.

Methods	Details of the Method	Accuracy
Chandaka et al. [26]	Cross correlation with SVM	95.96
Guo et al. [27]	Wavelet energy with BPN	95.20
Kannathal et al. [28]	Entropies with neuro-fuzzy inference	92.22
Kaya et al. [29]	One dimensional LBP with bayes-net	97.52
Hassan et al. [30]	WT with DT bagging	99.73
Nicolaou and Georgiou [31]	Entropy with SVM	97.12
Polat et al. [32]	Fast fourier transform with DT	98.72
Sharma and Pachori [33]	WT with SVM and fractal dimension	99.58
Tawfik et al. [34]	Entropy with SVM	99.52
Wang et al. [35]	WT + entropy with KNN	97.52
Yuan et al. [12]	LBP based on wavelet decomposition with SVM	99.63
Das et al. [43]	Dual-tree complex wavelet	100%
Our work	Pairwise matching of EEG signals and CNN	99.84

One softmax loss function is located at the end of this network, which is formulated as:

$$L_s = - \sum_{i=1}^N \log(P(\omega_k | L_i)), \quad (10)$$

where  $N$  denotes number of the input images,  $P(\omega_k | L_i)$  indicates the probability of correct classification.

### III. EXPERIMENTS

#### A. DATASET AND EVALUATION METRICS

##### 1) DATASET

In our work, the dataset [19], which was presented by Department of Epileptology, University of Bonn, was exploited in the epileptic EEG classification experiments. In general, the data samples were captured from five healthy subjects and five patients with epilepsy.

To be specific, there are five sets in the dataset denoted as A, B, C, D, and E. The EEG recordings of the health subjects were captured following the international 10-20 system. Meanwhile, the interictal and ictal samples were respectively collected from the depth electrodes and the same equipment with the electrodes planted into the lateral and basal regions of the neocortex. In each sequence, 100 EEG segments are incorporated and every segment consists of 4,096 sampling points while the duration for each segment is 23.6 seconds. All of the samples are divided into three categories including normal, interictal, and ictal that were collected from 128-channel EEG recordings after the pro-processing like artifacts eliminations.

In the experiments, three types of recordings composing of the A (normal), D (interictal), and E (ictal) were used to evaluate the performance of the proposed approach. In general, we sequentially conducted the binary classification of set A and D, set D and E as well set A, D, and E.

##### 2) PRE-PROCESSING

EEG has a low spatial resolution [20]. Therefore, the pre-processing of EEG recordings usually consists of the artifact elimination [21] from eye-movement [22], heartbeat [23], respiration [24], and electrical disturbance [25].

The EEG samples were captured from one 128-channel amplifier platform [19]. Furthermore, they were digitized at a sampling rate of 173.61Hz. And the corresponding output was then filtered by a band pass filter with 0.53 40Hz and 12 dB/octave.

##### 3) EVALUATION METRIC

In this study, *Accuracy* was employed as the performance metric in the experiments that could be formulated as:

$$Accuracy = \frac{TP + TN}{TP + TN + FP + FN}, \quad (11)$$

where  $TP$  denotes true positive,  $FP$  is false positive,  $TN$  represents true negative, and  $FN$  is false negative. *Precision* is commonly used to indicate the percentage of positive outcomes in total, and *Accuracy* denotes the true samples comparing with the entire set.

To evaluate the presented method in a robust fashion, we adopted one 10-fold cross-validation strategy. Firstly, the entire EEG signal samples were separated into ten subsets and each set contains same number of samples. Generally, we conducted 10 rounds of experiments for cross-validation. During one single round, one subgroup of recordings were taken into the testing set while the other 9 subsets were exploited as the training set.

It is notable that accuracy was firstly calculated for each round. Finally, the average accuracy was taken as the outcome result.

#### B. EXPERIMENTAL RESULTS

To evaluate the performance of the proposed algorithm, we respectively conducted experiments on Set A and D, Set D and E, and Set A, D, and E as illustrated in Table. 1, Table. 2, and Table. 3.

It can be observed from the tables including Table. 1, Table. 2, and Table. 3 that the classification performance of the proposed EEG classification framework achieved superior accuracy over the state-of-the-art EEG identification techniques with different features and classifiers. To be specific, most of these approaches exploit non-deep learning-based algorithms along with manually-crafted features to implement the classification of epileptic activity from the

**TABLE 2.** Performance comparison between state-of-the-art techniques and ours for interictal (Set D) and ictal (Set E) EEG signals.

Methods	Details of the Method	Accuracy
Kaya <i>et al.</i> [29]	One dimensional LBP with bayes-net	95.50
Siuly <i>et al.</i> [36]	Clustering with SVM	93.91
Song <i>et al.</i> [37]	Similarity-based measures + entropy with extreme learning machine	97.53
Supriya <i>et al.</i> [38]	Weighted visibility graph with SVM	93.25
Wang <i>et al.</i> [39]	Multi-scale blanket dimensions + fractal intercepts with SVM	97.58
Yuan <i>et al.</i> [12]	LBP based on wavelet decomposition with SVM	98.88
Das <i>et al.</i> [43]	Dual-tree complex wavelet	100%
Our work	Pairwise matching of EEG signals and CNN	99.61

**TABLE 3.** Performance comparison between state-of-the-art techniques and ours for normal (Set A), interictal (Set D), and ictal (Set E) EEG signals.

Methods	Details of the Method	Accuracy
Acharya <i>et al.</i> [40]	Entropies + HOS + fractal dimension with fuzzy	99.70
Kaya <i>et al.</i> [29]	One dimensional LBP with bayes-net	95.67
Hassan <i>et al.</i> [30]	WT with DT bagging	98.67
Li <i>et al.</i> [41]	DWT with NN	98.78
Li <i>et al.</i> [42]	CWT with SVM	98.97
Tawfik <i>et al.</i> [34]	Entropy with SVM	97.5
Yuan <i>et al.</i> [12]	LBP based on wavelet decomposition with SVM	98.92
Das <i>et al.</i> [43]	Dual-tree complex wavelet	100%
Our work	Pairwise matching of EEG signals and CNN	97.82

multi-channel EEG signals. Table. 1 provides the comparison of the accuracy performance between state-of-the-arts and our work for normal (Set A) and ictal (Set E) EEG signals. Since it is widely considered as a simple task at present, the accuracy results are close to 100%. Similarly, there have also been satisfactory outcome for both interictal (Set D) and ictal (Set E) as well as normal (Set A), interictal (Set D), and ictal (Set E) input.

### C. DISCUSSION

It has been wide proven that EEG could be leveraged as an invaluable too for diagnosing the epileptic seizures. And large amount of automated EEG signal identification techniques have been presented in the literature. However, most of these approaches follow a straightforward framework and usually neglect the association between pairwise EEG samples. To bridge this gap, we propose a deep learning-based algorithm that not only could both capture the association between the EEG activities and guarantee the accuracy of classification.

As shown in Table. 1, Table. 2, and Table. 3, the algorithm proposed in the work of [43] is superior over our approach. However, it is notable that we adopted the 10-fold cross-validation strategy in the experiments, which had not been taken into consideration by the state-of-the-arts including [43]. And we have achieved much higher accuracy by choosing the training set and testing set properly when we did not adopt the 10-fold cross-validation strategy.

### IV. CONCLUSION AND FUTURE WORK

Automatic identification of the associations between normal, interictal, and ictal patterns in raw EEG samples is one potentially valuable tool for the diagnosis and treatment of epilepsy. Previously, numerous researches have been

implemented for the EEG discrimination tasks. However, most of these techniques might neglect the spatial and temporal relationship between each pair of EEG signals. Thus, we presented a novel CNN-based algorithm for epileptic EEG identification.

In the future, we would continue to improve the accuracy of the proposed approach through fine-tuning and increasing the quantity of samples in the training set. Meanwhile, the permutation of the EEG signals will be taken into consideration. It is notable that the proposed approach relates to the following areas including network security [44]–[58], optimization [59]–[65], graphics [66]–[71], recommendation system [72]–[74], multimedia [75]–[82], automation control [83]–[87], networking [88]–[101], classification [102]–[106], image fusion [107], [108], image retrieval [109]–[114], and simulation [115]–[117].

### ABBREVIATIONS

Electroencephalogram–EEG  
 CNN–Convolutional neural network  
 Wavelet–WT  
 Local binary pattern–LBP  
 Support vector machine–SVM  
 TP–True Positive  
 FP–False Positive  
 TN–True Negative  
 FN–False Negative  
 GAN–Generative adversarial network

### DECLARATIONS

Ethical Approval and Consent to participate: Approved. Consent for publication: Approved. Availability of supporting data: We can provide the data.

## COMPETING INTERESTS

These no potential competing interests in our paper. And all authors have seen the manuscript and approved to submit to your journal. We confirm that the content of the manuscript has not been published or submitted for publication elsewhere.

## ACKNOWLEDGMENT

The authors thank the editor and anonymous reviewers for their helpful comments and valuable suggestions.

## REFERENCES

- [1] S. Ghosh-Dastidar and H. Adeli, "Improved spiking neural networks for EEG classification and epilepsy and seizure detection," *Integr. Comput.-Aided Eng.*, vol. 14, no. 3, pp. 187–212, May 2007.
- [2] S. Ghosh-Dastidar, H. Adeli, and N. Dadmehr, "Mixed-band wavelet-chaos-neural network methodology for epilepsy and epileptic seizure detection," *IEEE Trans. Biomed. Eng.*, vol. 54, no. 9, pp. 1545–1551, Sep. 2007.
- [3] S. Ghosh-Dastidar, H. Adeli, and N. Dadmehr, "Principal component analysis-enhanced cosine radial basis function neural network for robust epilepsy and seizure detection," *IEEE Trans. Biomed. Eng.*, vol. 55, no. 2, pp. 512–518, Feb. 2008.
- [4] P. Sharma, Y. U. Khan, O. Farooq, M. Tripathi, and H. Adeli, "A wavelet-statistical features approach for nonconvulsive seizure detection," *Clin. EEG Neurosci.*, vol. 45, no. 4, pp. 274–284, Jun. 2014.
- [5] O. Faust, U. R. Acharya, H. Adeli, and A. Adeli, "Wavelet-based EEG processing for computer-aided seizure detection and epilepsy diagnosis," *Seizure*, vol. 26, pp. 56–64, Mar. 2015.
- [6] J. Gotman, "Automatic recognition of epileptic seizures in the EEG," *Electroencephalogr. Clin. Neurophysiol.*, vol. 54, no. 5, pp. 530–540, Nov. 1982.
- [7] H. Adeli, Z. Zhou, and N. Dadmehr, "Analysis of EEG records in an epileptic patient using wavelet transform," *J. Neurosci. Methods*, vol. 123, no. 1, pp. 69–87, Feb. 2003.
- [8] H. Adeli, S. Ghosh-Dastidar, and N. Dadmehr, "A wavelet-chaos methodology for analysis of EEGs and EEG subbands to detect seizure and epilepsy," *IEEE Trans. Biomed. Eng.*, vol. 54, no. 2, pp. 205–211, Feb. 2007.
- [9] H. Adeli and S. Ghosh-Dastidar, *Automated EEG-based Diagnosis of Neurological Disorders—Inventing the Future of Neurology*. Boca Raton, FL, USA: CRC Press, 2010.
- [10] U. R. Acharya, S. L. Oh, Y. Hagiwara, J. H. Tan, and H. Adeli, "Deep convolutional neural network for the automated detection of seizure using EEG signals," *Comput. Biol. Med.*, vol. 100, pp. 270–278, Sep. 2018.
- [11] U. R. Acharya, Y. Hagiwara, and H. Adeli, "Automated seizure prediction," *Epilepsy Behav.*, vol. 88, pp. 251–261, Nov. 2018.
- [12] Q. Yuan, W. Zhou, F. Xu, Y. Leng, and D. Wei, "Epileptic EEG identification via LBP operators on wavelet coefficients," *Int. J. Neural Syst.*, vol. 28, no. 08, Aug. 2018, Art. no. 1850010.
- [13] Y. Li, W. Cui, M. Luo, K. Li, and L. Wang, "Epileptic seizure detection based on time-frequency images of EEG signals using Gaussian mixture model and gray level co-occurrence matrix features," *Int. J. Neural Syst.*, vol. 28, no. 07, Jul. 2018, Art. no. 1850003.
- [14] P. P. M. Shanir, K. A. Khan, Y. U. Khan, O. Farooq, and H. Adeli, "Automatic seizure detection based on morphological features using one-dimensional local binary pattern on long-term EEG," *Clin. EEG Neurosci.*, vol. 49, no. 5, pp. 351–362, Dec. 2017.
- [15] A. O'Shea, G. Lightbody, G. Boylan, and A. Temko, "Neonatal seizure detection using convolutional neural networks," in *Proc. IEEE 27th Int. Workshop Mach. Learn. Signal Process. (MLSP)*, Sep. 2017, pp. 1–6.
- [16] N. D. Truong, A. D. Nguyen, L. Kuhlmann, M. R. Bonyadi, J. Yang, S. Ippolito, and O. Kavehei, "Convolutional neural networks for seizure prediction using intracranial and scalp electroencephalogram," *Neural Netw.*, vol. 105, pp. 104–111, Sep. 2018.
- [17] K.-I. Funahashi, "On the approximate realization of continuous mappings by neural networks," *Neural Netw.*, vol. 2, no. 3, pp. 183–192, Jan. 1989.
- [18] J. Cao, Y. Pang, X. Li, and J. Liang, "Randomly translational activation inspired by the input distributions of ReLU," *Neurocomputing*, vol. 275, pp. 859–868, Jan. 2018.
- [19] R. G. Andrzejak, K. Lehnertz, F. Mormann, C. Rieke, P. David, and C. E. Elger, "Indications of nonlinear deterministic and finite-dimensional structures in time series of brain electrical activity: Dependence on recording region and brain state," *Phys. Rev. E, Stat. Phys. Plasmas Fluids Relat. Interdiscip. Top.*, vol. 64, no. 6, Nov. 2001, Art. no. 061907.
- [20] R. Aler, A. Vega, I. M. Galván, and A. J. Nebro, "Multi-objective meta-heuristics for preprocessing EEG data in brain-computer interfaces," *Eng. Optim.*, vol. 44, no. 3, pp. 373–390, Mar. 2012.
- [21] S. D. Shirk, D. G. McLaren, J. S. Bloomfield, A. Powers, A. Duffy, M. B. Mitchell, A. Ezzati, B. A. Ally, and A. Atri, "Inter-rater reliability of preprocessing EEG data: Impact of subjective artifact removal on associative memory task ERP results," *Frontiers Neurosci.*, vol. 11, p. 322, Jun. 2017.
- [22] S. Gupta and H. Singh, "Preprocessing EEG signals for direct human-system interface," in *Proc. IEEE Int. Joint Symp. Intell. Syst.*, Nov. 1996, pp. 32–37.
- [23] P. J. Van den Berg and G. J. F. Brekelmans, "Rhythmic heart beat artefacts mimicking an ictal EEG pattern with abundant interictal epileptiform activity in both mother and child," *Epileptic Disorders*, vol. 13, no. 2, pp. 177–180, Jun. 2011.
- [24] B. A. Schwartz, M. Seguy, and J. P. Escande, "EEG, respiratory, ocular and myographic correlations in the Pickwick syndrome and other apparently related conditions: Proposal for a hypothesis," *Electroencephalogr. Clin. Neurophysiol.*, vol. 23, no. 4, p. 386, 1967.
- [25] M. T. Akhtar, W. Mitsuhashi, and C. J. James, "Employing spatially constrained ICA and wavelet denoising, for automatic removal of artifacts from multichannel EEG data," *Signal Process.*, vol. 92, no. 2, pp. 401–416, Feb. 2012.
- [26] S. Chandaka, A. Chatterjee, and S. Munshi, "Cross-correlation aided support vector machine classifier for classification of EEG signals," *Expert Syst. Appl.*, vol. 36, no. 2, pp. 1329–1336, Mar. 2009.
- [27] L. Guo, D. Rivero, J. A. Seoane, and A. Pazos, "Classification of EEG signals using relative wavelet energy and artificial neural networks," in *Proc. 1st ACM/SIGEVO Summit Genetic Evol. Comput. (GEC)*, Shanghai, China, 2009, pp. 177–183.
- [28] N. Kannathal, M. L. Choo, U. R. Acharya, and P. K. Sadasivan, "Entropies for detection of epilepsy in EEG," *Comput. Methods Programs Biomed.*, vol. 80, no. 3, pp. 187–194, Dec. 2005.
- [29] Y. Kaya, M. Uyar, R. Tekin, and S. Yildirim, "1D-local binary pattern based feature extraction for classification of epileptic EEG signals," *Appl. Math. Comput.*, vol. 243, pp. 209–219, Sep. 2014.
- [30] A. R. Hassan, S. Siuly, and Y. Zhang, "Epileptic seizure detection in EEG signals using tunable-Q factor wavelet transform and bootstrap aggregating," *Comput. Methods Programs Biomed.*, vol. 137, pp. 247–259, Dec. 2016.
- [31] N. Nicolaou and J. Georgiou, "Detection of epileptic electroencephalogram based on permutation entropy and support vector machines," *Expert Syst. Appl.*, vol. 39, no. 1, pp. 202–209, Jan. 2012.
- [32] K. Polat and S. Gunes, "Classification of epileptiform EEG using a hybrid system based on decision tree classifier and fast Fourier transform," *Appl. Math. Comput.*, vol. 187, no. 2, pp. 1017–1026, 2007.
- [33] M. Sharma and R. B. Pachori, "A novel approach to detect epileptic seizures using a combination of tunable-q wavelet transform and fractal dimension," *J. Mech. Med. Biol.*, vol. 17, no. 07, Nov. 2017, Art. no. 1740003.
- [34] N. S. Tawfik, S. M. Youssef, and M. Kholief, "A hybrid automated detection of epileptic seizures in EEG records," *Comput. Electr. Eng.*, vol. 53, pp. 177–190, Jul. 2016.
- [35] D. Wang, D. Miao, and C. Xie, "Best basis-based wavelet packet entropy feature extraction and hierarchical EEG classification for epileptic detection," *Expert Syst. Appl.*, vol. 38, no. 11, pp. 14314–14320, Jun. 2011.
- [36] S. Siuly, Y. Li, and P. Wen, "Clustering technique-based least square support vector machine for EEG signal classification," *Comput. Methods Programs Biomed.*, vol. 104, no. 3, pp. 358–372, Dec. 2011.
- [37] J.-L. Song, W. Hu, and R. Zhang, "Automated detection of epileptic EEGs using a novel fusion feature and extreme learning machine," *Neurocomputing*, vol. 175, pp. 383–391, Jan. 2016.
- [38] S. Supriya, S. Siuly, H. Wang, J. Cao, and Y. Zhang, "Weighted visibility graph with complex network features in the detection of epilepsy," *IEEE Access*, vol. 4, pp. 6554–6566, 2016.
- [39] Y. Wang, W. Zhou, and Q. Yuan, "Comparison of ictal and interictal EEG signals using fractal features," *Int. J. Neural Syst.*, vol. 23, no. 6, 2013, Art. no. 1350028.


- [40] U. R. Acharya, S. V. Sree, P. C. A. Ang, R. Yanti, and J. S. Suri, "Application of non-linear and wavelet based features for the automated identification of epileptic eeg signals," *Int. J. Neural Syst.*, vol. 22, no. 02, Apr. 2012, Art. no. 1250002.
- [41] M. Li, W. Chen, and T. Zhang, "Classification of epilepsy EEG signals using DWT-based envelope analysis and neural network ensemble," *Biomed. Signal Process. Control*, vol. 31, pp. 357–365, Jan. 2017.
- [42] M. Li, W. Chen, and T. Zhang, "Automatic epileptic EEG detection using DT-CWT-based non-linear features," *Biomed. Signal Process. Control*, vol. 34, pp. 114–125, Apr. 2017.
- [43] A. B. Das, M. I. H. Bhuiyan, and S. M. S. Alam, "Classification of EEG signals using normal inverse Gaussian parameters in the dual-tree complex wavelet transform domain for seizure detection," *Signal, Image Video Process.*, vol. 10, no. 2, pp. 259–266, Dec. 2014.
- [44] Y. Song, H. Wang, X. Wei, and L. Wu, "Efficient attribute-based encryption with privacy-preserving key generation and its application in industrial cloud," *Secur. Commun. Netw.*, vol. 2019, May 2019, Art. no. 3249726.
- [45] J. Cai, H. Jiang, P. Zhang, Z. Zheng, H. Wang, G. Lu, and Q. Xu, "ID-based strong designated verifier signature over  $R$ -SIS assumption," *Secur. Commun. Netw.*, vol. 2019, Jul. 2019, Art. no. 9678095.
- [46] H. Jiang, H. Wang, Z. Zheng, and Q. Xu, "Privacy preserved wireless sensor location protocols based on mobile edge computing," *Comput. Secur.* vol. 84, pp. 393–401, Jul. 2019.
- [47] W. Zhang and V. Rijmen, "Division cryptanalysis of block ciphers with a binary diffusion layer," *IET Inf. Secur.*, vol. 13, no. 2, pp. 87–95, Mar. 2019.
- [48] G. Han, W. Zhang, and H. Zhao, "An upper bound of the longest impossible differentials of several block ciphers," *Ksii Trans. Internet Inf. Syst.*, vol. 13, no. 1, pp. 435–451, 2019.
- [49] Y. X. Yan, L. Wu, W. Y. Xu, H. Wang, and Z. M. Liu, "Integrity audit of shared cloud data with identity tracking," *Secur. Commun. Netw.*, vol. 2019, Mar. 2019, Art. no. 1354346.
- [50] Y. Yan, L. Wu, G. Gao, H. Wang, and W. Xu, "A dynamic integrity verification scheme of cloud storage data based on lattice and Bloom filter," *J. Inf. Secur. Appl.*, vol. 39, pp. 10–18, Apr. 2018.
- [51] Z. Guoqiang and Z. Wenyang, "Searching for perfect diffusion matrices with lightweight coefficients," *J. Inf. Secur. Appl.*, vol. 38, pp. 65–70, Feb. 2018.
- [52] P. Zhang and W. Zhang, "Differential cryptanalysis on block cipher skinny with MILP program," *Secur. Commun. Netw.*, vol. 2018, Oct. 2018, Art. no. 3780407.
- [53] H. Wang, D. He, J. Shen, Z. Zheng, C. Zhao, and M. Zhao, "Verifiable outsourced ciphertext-policy attribute-based encryption in cloud computing," *Soft Comput.*, vol. 21, no. 24, pp. 7325–7335, Jul. 2016.
- [54] H. Wang, Z. Zheng, L. Wu, and P. Li, "New directly revocable attribute-based encryption scheme and its application in cloud storage environment," *Cluster Comput.*, vol. 20, no. 3, pp. 2385–2392, Nov. 2016.
- [55] G. Han and W. Zhang, "Improved biclique cryptanalysis of the lightweight block cipher piccolo," *Secur. Commun. Netw.*, vol. 2017, Mar. 2017, Art. no. 7589306.
- [56] W. Zhang and W. Zhang, "Algebraic techniques on searching linear diffusion layers in block cipher," *Secur. Commun. Netw.*, vol. 9, no. 17, pp. 4285–4294, Sep. 2016.
- [57] H. Wang, Z. Liu, Z. Liu, and D. S. Wong, "Identity-based aggregate signcryption in the standard model from multilinear maps," *Frontiers Comput. Sci.*, vol. 10, no. 4, pp. 741–754, Dec. 2015.
- [58] H. Ji and H. Zhang, "Analysis on the content features and their correlation of Web pages for spam detection," *China Commun.*, vol. 12, no. 3, pp. 84–94, Mar. 2015.
- [59] J.-Q. Li, M.-X. Song, L. Wang, P.-Y. Duan, Y.-Y. Han, H.-Y. Sang, and Q.-K. Pan, "Hybrid artificial bee colony algorithm for a parallel batching distributed flow shop problem with deteriorating jobs," *IEEE Trans. Cybern.*, to be published, doi: [10.1109/TCYB.2019.2943606](https://doi.org/10.1109/TCYB.2019.2943606).
- [60] J. Sun, Z. Miao, D. Gong, X.-J. Zeng, J. Li, and G. Wang, "Interval multiobjective optimization with memetic algorithms," *IEEE Trans. Cybern.*, to be published.
- [61] H. Liu, B. Xu, D. Lu, and G. Zhang, "A path planning approach for crowd evacuation in buildings based on improved artificial bee colony algorithm," *Appl. Soft Comput.*, vol. 68, pp. 360–376, Jul. 2018.
- [62] C. Lv, W. Jiang, S. Hu, J. Wang, G. Lu, and Z. Liu, "Efficient dynamic evolution of service composition," *IEEE Trans. Services Comput.*, vol. 11, no. 4, pp. 630–643, Jul. 2018.
- [63] H. Wang, D. He, J. Shen, Z. Zheng, X. Yang, and M. H. Au, "Fuzzy matching and direct revocation: A new CP-ABE scheme from multilinear maps," *Soft Comput.*, vol. 22, no. 7, pp. 2267–2274, Jan. 2017.
- [64] L. Zhai and H. Wang, "Crowdsensing task assignment based on particle swarm optimization in cognitive radio networks," *Wireless Commun. Mobile Comput.*, vol. 2017, pp. 1–9, 2017.
- [65] X. Zheng, X. Yu, and Y. Li, "An Enhanced Multi-objective Group Search Optimizer Based on Multi-producer and Crossover Operator.," *J. Inf. Sci. Eng.*, vol. 2017, pp. 37–50.
- [66] Y. Han, L. Zhu, Z. Cheng, J. Li, and X. Liu, "Discrete optimal graph clustering," *IEEE Trans. Cybern.*, vol. 50, no. 4, pp. 1697–1710, Apr. 2020, doi: [10.1109/TCYB.2018.2881539](https://doi.org/10.1109/TCYB.2018.2881539).
- [67] J. Li, K. Lu, Z. Huang, L. Zhu, and H. T. Shen, "Heterogeneous domain adaptation through progressive alignment," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 30, no. 5, pp. 1381–1391, May 2019.
- [68] J. Li, K. Lu, Z. Huang, L. Zhu, and H. T. Shen, "Transfer independently together: A generalized framework for domain adaptation," *IEEE Trans. Cybern.*, vol. 49, no. 6, pp. 2144–2155, Jun. 2019.
- [69] X. Dong, H. Zhang, L. Zhu, W. Wan, Z. Wang, Q. Wang, P. Guo, H. Ji, and J. Sun, "Weighted locality collaborative representation based on sparse subspace," *J. Vis. Commun. Image Represent.*, vol. 58, pp. 187–194, Jan. 2019.
- [70] D. Shi, L. Zhu, Z. Cheng, Z. Li, and H. Zhang, "Unsupervised multi-view feature extraction with dynamic graph learning," *J. Vis. Commun. Image Represent.*, vol. 56, pp. 256–264, Oct. 2018.
- [71] Y. Fang, H. Zhang, and Y. Ren, "Graph regularised sparse NMF factorisation for imagery de-noising," *IET Comput. Vis.*, vol. 12, no. 4, pp. 466–475, Jun. 2018.
- [72] Z. Cheng, X. Chang, L. Zhu, R. C. Kanjirathinkal, and M. Kankanhalli, "MMALFM: Explainable recommendation by leveraging reviews and images," *ACM Trans. Inf. Syst.*, vol. 37, no. 2, pp. 1–28, Jan. 2019.
- [73] S. Xing, F. Liu, Q. Wang, X. Zhao, and T. Li, "A hierarchical attention model for rating prediction by leveraging user and product reviews," *Neurocomputing*, vol. 332, pp. 417–427, Mar. 2019.
- [74] H. Wu, H. Zhang, and L. Cui, "A heuristic model for supporting users' decision-making in privacy disclosure for recommendation," *Secur. Commun. Netw.*, vol. 2018, Feb. 2018, Art. no. 2790373.
- [75] C. Cui, H. Liu, T. Lian, L. Nie, L. Zhu, and Y. Yin, "Distribution-oriented aesthetics assessment with semantic-aware hybrid network," *IEEE Trans. Multimedia*, vol. 21, no. 5, pp. 1209–1220, May 2019.
- [76] M. Zhang, H. Zhang, J. Li, L. Wang, Y. Fang, and J. Sun, "Supervised graph regularization based cross media retrieval with intra and inter-class correlation," *J. Vis. Commun. Image Represent.*, vol. 58, pp. 1–11, Jan. 2019.
- [77] J. Sun, Y. Wang, J. Li, W. Wan, D. Cheng, and H. Zhang, "View-invariant gait recognition based on kinect skeleton feature," *Multimedia Tools Appl.*, vol. 77, no. 19, pp. 24909–24935, Feb. 2018.
- [78] J. Zong, L. Meng, Y. Tan, J. Zhang, Y. Ren, and H. Zhang, "Adaptive reconstruction based multiple description coding with randomly offset quantizations," *Multimedia Tools Appl.*, vol. 77, no. 20, pp. 26293–26313, Mar. 2018.
- [79] S. Hou, S. Zhou, W. Liu, and Y. Zheng, "Classifying advertising video by topicalizing high-level semantic concepts," *Multimedia Tools Appl.*, vol. 77, no. 19, pp. 25475–25511, Mar. 2018.
- [80] B. Zhang, L. Zhu, J. Sun, and H. Zhang, "Cross-media retrieval with collective deep semantic learning," *Multimedia Tools Appl.*, vol. 77, no. 17, pp. 22247–22266, Mar. 2018.
- [81] B. Liu, H. Liu, H. Zhang, and X. Qin, "A social force evacuation model driven by video data," *Simul. Model. Pract. Theory*, vol. 84, pp. 190–203, May 2018.
- [82] J. Sun, X. Liu, W. Wan, J. Li, D. Zhao, and H. Zhang, "Video hashing based on appearance and attention features fusion via DBN," *Neurocomputing*, vol. 213, pp. 84–94, Nov. 2016.
- [83] B. Niu, D. Wang, D. Naif Alotaibi, and E. Fuad Alsaadi, "Adaptive neural state-feedback tracking control of stochastic nonlinear switched systems: An average dwell-time method," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 30, no. 4, pp. 1076–1087, Aug. 2019.
- [84] Ben Niu, Yanjun Liu, Wanlu Zhou, Haitao Li, Peiyong Duan, and Junqing Li, "Multiple Lyapunov functions for adaptive neural tracking control of switched nonlinear non-lower-triangular systems," *IEEE Trans. Cybern.*, to be published. [Online]. Available: <https://ieeexplore.ieee.org/document/8681071>, doi: [10.1109/TCYB.2019.2906372](https://doi.org/10.1109/TCYB.2019.2906372).



- [85] Y. Tan, M. Xiong, B. Niu, J. Liu, and S. Fei, "Distributed hybrid-triggered  $H_\infty$  filter design for sensor networked systems with output saturations," *Neurocomputing*, vol. 315, pp. 261–271, Nov. 2018.
- [86] L. Ma, X. Huo, X. Zhao, B. Niu, and G. Zong, "Adaptive neural control for switched nonlinear systems with unknown backlash-like hysteresis and output dead-zone," *Neurocomputing*, vol. 357, pp. 203–214, Sep. 2019.
- [87] Z. Wang, J. Xu, X. Song, and H. Zhang, "Consensus problem in multi-agent systems under delayed information," *Neurocomputing*, vol. 316, pp. 277–283, Nov. 2018.
- [88] J. Tian, H. Zhang, D. Wu, and D. Yuan, "QoS-constrained medium access probability optimization in wireless interference-limited networks," *IEEE Trans. Commun.*, vol. 66, no. 3, pp. 1064–1077, Mar. 2018.
- [89] C. Luo, C. Tan, X. Wang, and Y. Zheng, "An evolving recurrent interval type-2 intuitionistic fuzzy neural network for Online learning and time series prediction," *Appl. Soft Comput.*, vol. 78, pp. 150–163, May 2019.
- [90] X. Zheng, J. Tian, X. Xiao, X. Cui, and X. Yu, "A heuristic survivable virtual network mapping algorithm," *Soft Comput.*, vol. 23, no. 5, pp. 1453–1463, Mar. 2018.
- [91] B. Hu, H. Wang, X. Yu, W. Yuan, and T. He, "Sparse network embedding for community detection and sign prediction in signed social networks," *J. Ambient Intell. Hum. Comput.*, vol. 10, no. 1, pp. 175–186, Nov. 2017.
- [92] H. Wu, H. Zhang, L. Cui, and X. Wang, "CEPTM: A cross-edge model for diverse personalization service and topic migration in MEC," *Wireless Commun. Mobile Comput.*, vol. 2018, Aug. 2018, Art. no. 8056195.
- [93] Z. Wang, H. Zhang, M. Fu, and H. Zhang, "Consensus for high-order multi-agent systems with communication delay," *Sci. China Inf. Sci.*, vol. 60, no. 9, May 2017, Art. no. 092204.
- [94] D. Lu, B. Hu, X. Zheng, H. Liu, and G. Zhang, "Session-based cloud video delivery networks in mobile Internet," *J. Internet Technol.*, vol. 18, no. 7, pp. 1561–1571, 2017.
- [95] L. Zhai, H. Wang, and C. Liu, "Distributed schemes for crowdsourcing-based sensing task assignment in cognitive radio networks," *Wireless Commun. Mobile Comput.*, vol. 2017, Dec. 2017, Art. no. 5017653.
- [96] X. Xiao, X. Zheng, and Y. Zhang, "A multidomain survivable virtual network mapping algorithm," *Secur. Commun. Netw.*, vol. 2017, Nov. 2017, Art. no. 5258010.
- [97] H. Liu, Z. H. Chen, X. W. Zheng, B. Hu, and D. J. Lu, "Energy-efficient virtual network embedding in networks for cloud computing," *Int. J. Web Grid Services*, vol. 13, no. 1, pp. 75–93, 2017.
- [98] T. Zhang, "Delay-aware data transmission of multi-carrier communications in the presence of renewable energy," *Wireless Pers. Commun.*, vol. 90, no. 3, pp. 1533–1545, Jun. 2016.
- [99] X. Zheng, B. Hu, and D. Lu, "A multi-objective virtual network embedding algorithm in cloud computing," *J. Internet Technol.*, vol. 17, no. 4, pp. 633–642, 2016.
- [100] F. Liu, T. Li, and C. Xing, "A hierarchical HRRP(k) network and its application," *Peer-Peer Netw. Appl.*, vol. 8, no. 3, pp. 337–351, 2015.
- [101] T. Zhang, W. Chen, and Z. Cao, "DNF—AF selection two-way relaying," *Wireless Pers. Commun.*, vol. 80, no. 2, pp. 805–818, 2015.
- [102] C. Ji, C. Zhao, L. Pan, S. Liu, C. Yang, and X. Meng, "A just-in-time shapelet selection service for Online time series classification," *Comput. Netw.*, vol. 157, pp. 89–98, Jul. 2019.
- [103] X. Sui, Y. Zheng, B. Wei, H. Bi, J. Wu, X. Pan, Y. Yin, and S. Zhang, "Choroid segmentation from optical coherence tomography with graph-edge weights learned from deep convolutional neural networks," *Neurocomputing*, vol. 237, pp. 332–341, May 2017.
- [104] X. Dong, H. Zhang, J. Sun, and W. Wan, "A two-stage learning approach to face recognition," *J. Vis. Commun. Image Represent.*, vol. 43, pp. 21–29, Feb. 2017.
- [105] Y. Zhao, X. Zhao, Z. Xiang, and Y. Liu, "Online learning of dynamic multi-view gallery for person re-identification," *Multimedia Tools Appl.*, vol. 76, no. 1, pp. 217–241, Nov. 2015.
- [106] Q. Mei, H. Zhang, and C. Liang, "A discriminative feature extraction approach for tumor classification using gene expression data," *Current Bioinf.*, vol. 11, no. 5, pp. 561–570, Nov. 2016.
- [107] F. Zhang and K. Zhang, "Superpixel guided structure sparsity for multi-spectral and hyperspectral image fusion over couple dictionary," *Multimedia Tools Appl.*, pp. 1–16, Jan. 2019.
- [108] Y. Jiang, Y. Zheng, S. Hou, Y. Chang, and J. Gee, "Multimodal image alignment via linear mapping between feature modalities," *J. Healthcare Eng.*, vol. 2017, Jul. 2017, Art. no. 8625951.
- [109] L. Zhu, Z. Huang, Z. Li, L. Xie, and H. T. Shen, "Exploring auxiliary context: Discrete semantic transfer hashing for scalable image retrieval," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 29, no. 11, pp. 5264–5276, Nov. 2018.
- [110] L. Wang, L. Zhu, X. Dong, L. Liu, J. Sun, and H. Zhang, "Joint feature selection and graph regularization for modality-dependent cross-modal retrieval," *J. Vis. Commun. Image Represent.*, vol. 54, pp. 213–222, Jul. 2018.
- [111] J. Yan, H. Zhang, J. Sun, Q. Wang, P. Guo, L. Meng, W. Wan, and X. Dong, "Joint graph regularization based modality-dependent cross-media retrieval," *Multimedia Tools Appl.*, vol. 77, no. 3, pp. 3009–3027, Jun. 2017.
- [112] X. Dong, J. Sun, P. Duan, L. Meng, Y. Tan, W. Wan, H. Wu, B. Zhang, and H. Zhang, "Semi-supervised modality-dependent cross-media retrieval," *Multimedia Tools Appl.*, vol. 77, no. 3, pp. 3579–3595, Sep. 2017.
- [113] M. Zhao, H. Zhang, and L. Meng, "An angle structure descriptor for image retrieval," *China Commun.*, vol. 13, no. 8, pp. 222–230, Aug. 2016.
- [114] M. Zhao, H. Zhang, and J. Sun, "A novel image retrieval method based on multi-trend structure descriptor," *J. Vis. Commun. Image Represent.*, vol. 38, pp. 73–81, Jul. 2016.
- [115] X. Qin, H. Liu, H. Zhang, and B. Liu, "A collective motion model based on two-layer relationship mechanism for bi-direction pedestrian flow simulation," *Simul. Model. Pract. Theory*, vol. 84, pp. 268–285, May 2018.
- [116] H. Liu, B. Liu, H. Zhang, L. Li, X. Qin, and G. Zhang, "Crowd evacuation simulation approach based on navigation knowledge and two-layer control mechanism," *Inf. Sci.*, vols. 436–437, pp. 247–267, Apr. 2018.
- [117] Y. Han, H. Liu, and P. Moore, "Extended route choice model based on available evacuation route set and its application in crowd evacuation simulation," *Simul. Model. Pract. Theory*, vol. 75, pp. 1–16, Jun. 2017.
- [118] C. Zhang, D. Song, Y. Chen, X. Feng, C. Lumezanu, W. Cheng, J. Ni, B. Zong, H. Chen, and N. V. Chawla, "A deep neural network for unsupervised anomaly detection and diagnosis in multivariate time series data," in *Proc. AAAI Conf. Artif. Intell.*, vol. 33, Jul. 2019, pp. 1409–1416.
- [119] D. Song, N. Xia, W. Cheng, H. Chen, and D. Tao, "Deep r-th root of rank supervised joint binary embedding for multivariate time series retrieval," in *Proc. 24th ACM SIGKDD Int. Conf. Knowl. Discovery Data Mining*, Aug. 2018, pp. 2229–2238.



**JIAN LIAN** is currently an Instructor with the Shandong University of Science and Technology. His research interests include machine learning and image processing.



**YAN ZHANG** is currently an Instructor with the Shandong Management University. Her research interests include information management, machine vision, and deep learning.



**RONG LUO** is currently an Associate Professor and also an M.A. Supervisor with the Qilu University of Technology. Her research and teaching interests are in the areas on computational chemistry, intelligent bionic materials, machine learning, and so on.



**GUOYONG HAN** is currently an Associate Professor with the School of Management Engineering, Shandong Jianzhu University. His research interests include machine learning and image processing.



**CHENGJIANG LI** is currently an Instructor with the Shandong University of Science and Technology. His research interests consist of artificial intelligence and image processing.

...



**WEIKUAN JIA** is currently an Associate Professor with Shandong Normal University. His research and teaching interests are in the areas on artificial intelligence, intelligent information and image processing, smart agriculture, and so on. He is a member of the CCF and CAAI.